




# TomTom GO Live 1535M Speaker Replacement

In this guide we will disassemble the device to remove the speaker so that it can be replaced.

Written By: Mathias Sagide

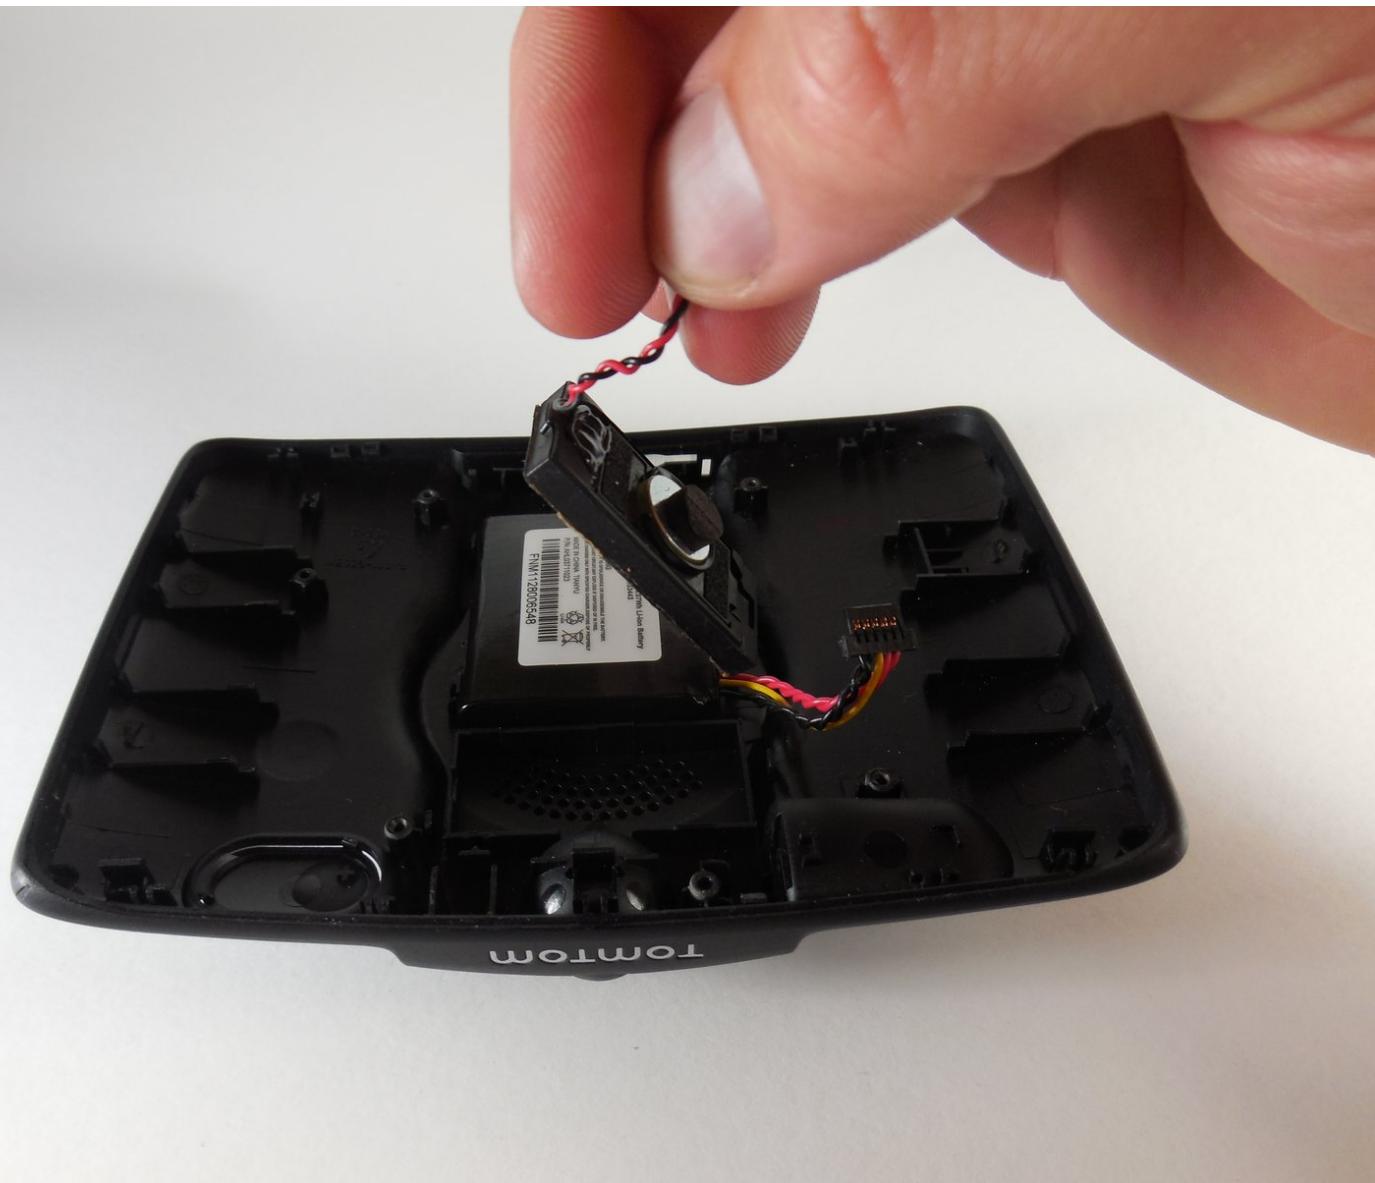

 **TOOLS:**



- [64 Bit Driver Kit \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Tweezers \(1\)](#)

## Step 1 — Screen



- Slip a small opening tool underneath the screen, gently sliding it around the outside edge.
- (i)* It may be easier to start at the corners.

## Step 2 — Cables

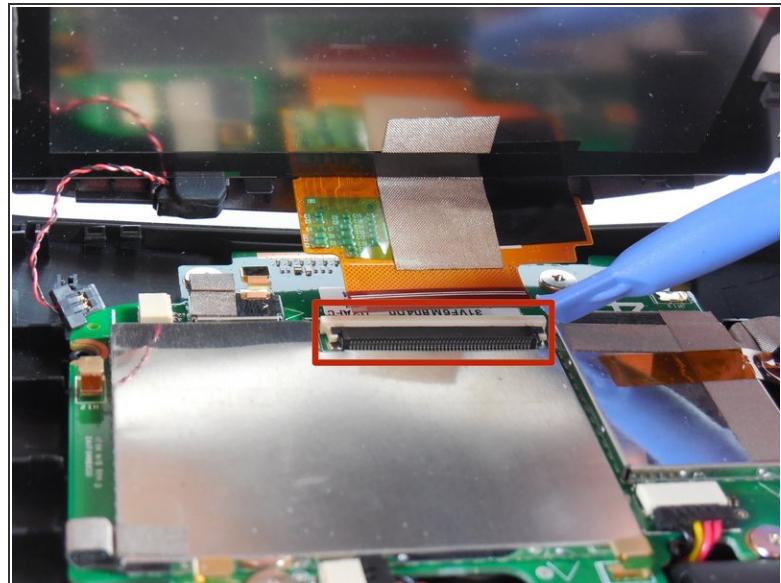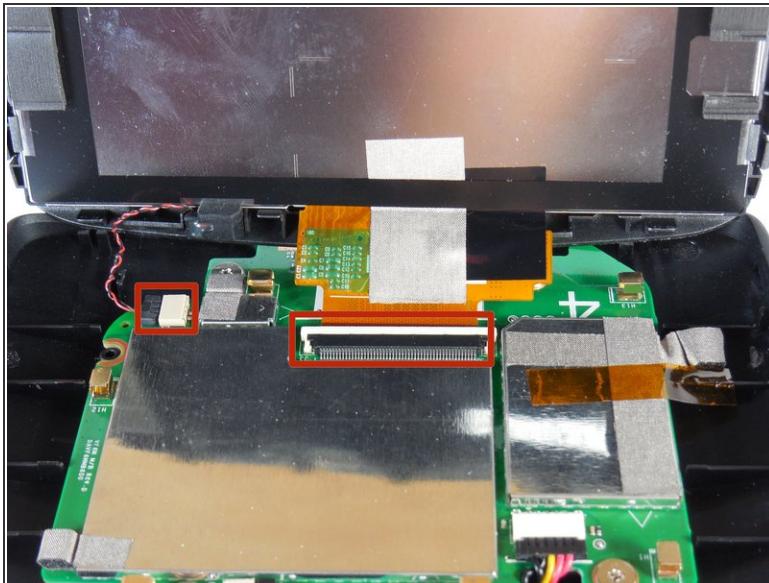

- Carefully remove the reset button cable (located on the left) and the ribbon cable.
- Remove the screen and set it aside.

## Step 3 — Logic Board Cables



- Remove the logic board cables.


**⚠** We highly advice that a pair of tweezers are used for this step to ensure no part is damaged.

## Step 4 — Screws



- Remove the 3.6mm screws with a Phillips Screwdriver.
- After removing the screws simply lift the logic board from the base.

## Step 5 — Speaker

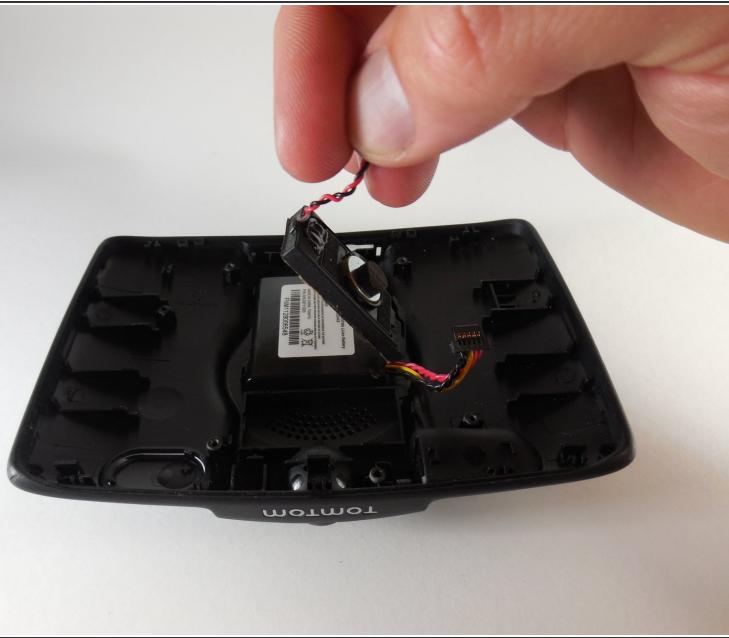

- Simply lift the speaker up and out of the base to replace it.

To reassemble your device, follow these instructions in reverse order.