




Toshiba A1304T Keypad Replacement

Written By: Christopher

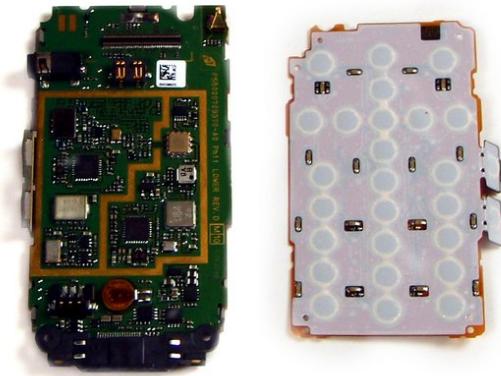

INTRODUCTION

Use this guide to replace your Toshiba AT1304T keypad

TOOLS:

- Flathead 3/32" or 2.5 mm Screwdriver (1)
- T8 Torx Security Bit Screwdriver (1)

PARTS:

- Toshiba A1304T Keypad (1)

Step 1 — Back panel



- Using a thumb-tack, push-pin, or similar pin, remove the four plastic stoppers located on the back panel.


Step 2



- With the T8 Torx Security Bit Screwdriver, remove the four screws in the designated locations.


(i) The T8 Torx Security Bit Screwdriver can be substituted with a small flathead screwdriver. Screw removal may be slightly more difficult however.

Step 3

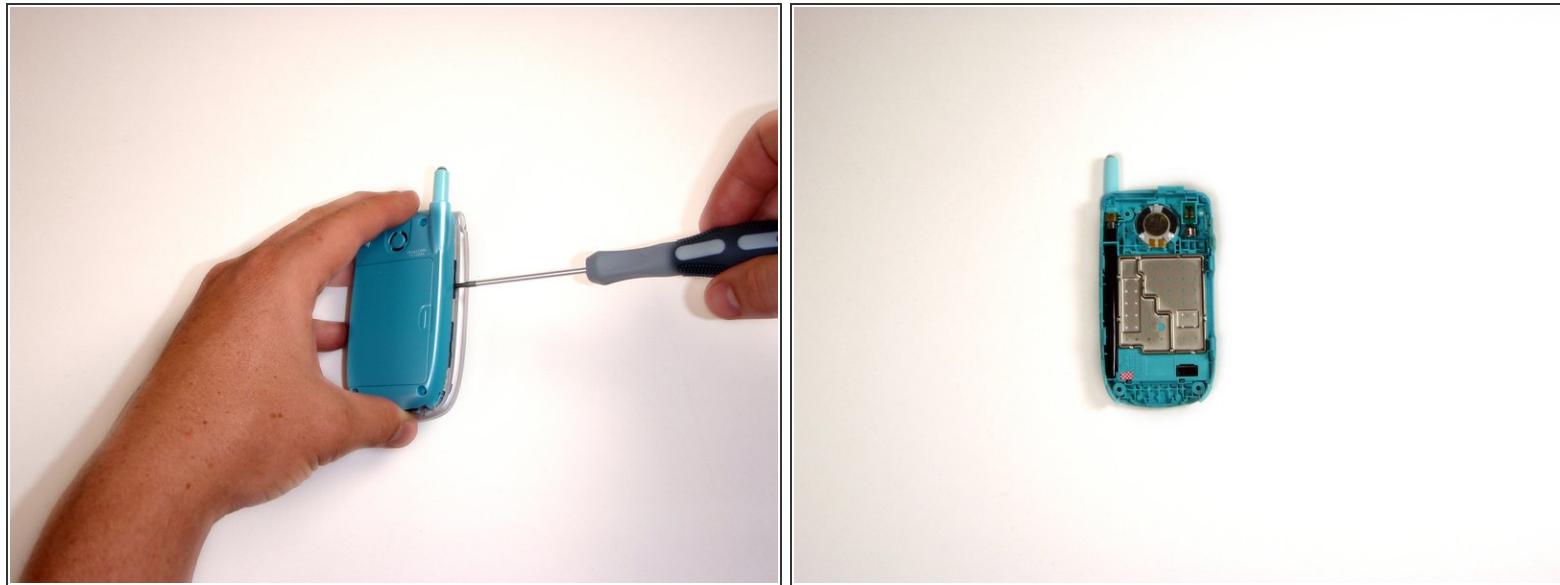



- If needed, use the flathead screwdriver to gently pry the panel from the phone.
- Using your fingers, lift the panel from the device.

Step 4 — Keypad

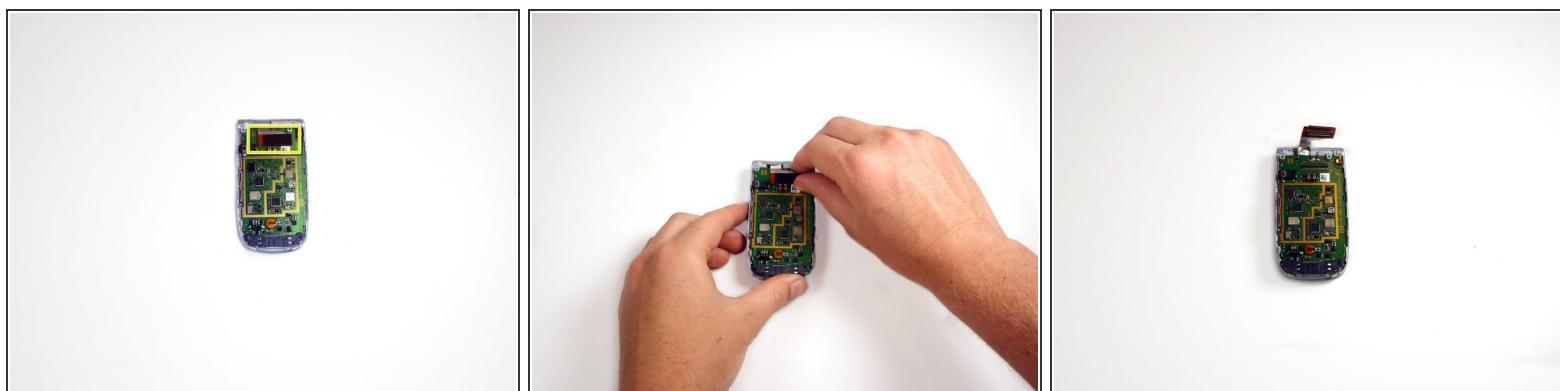



- Use your fingers to detach the ribbon wire located on the top of the logic board, as shown.

Step 5

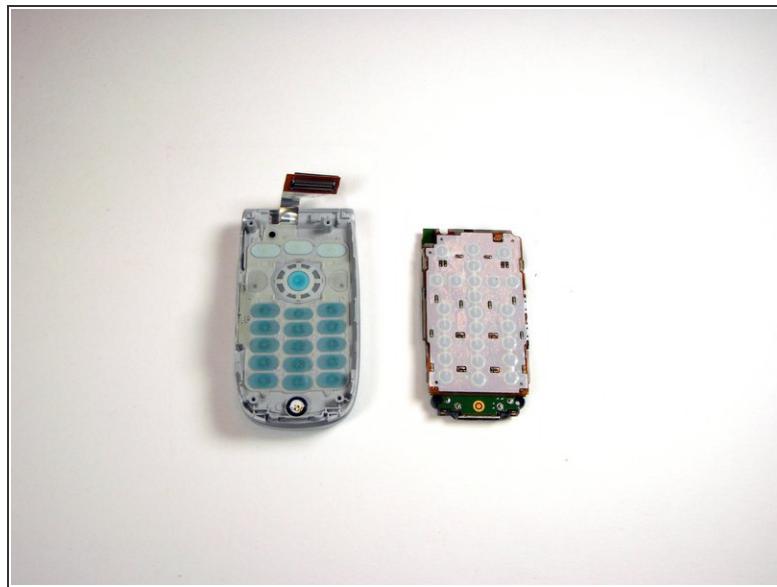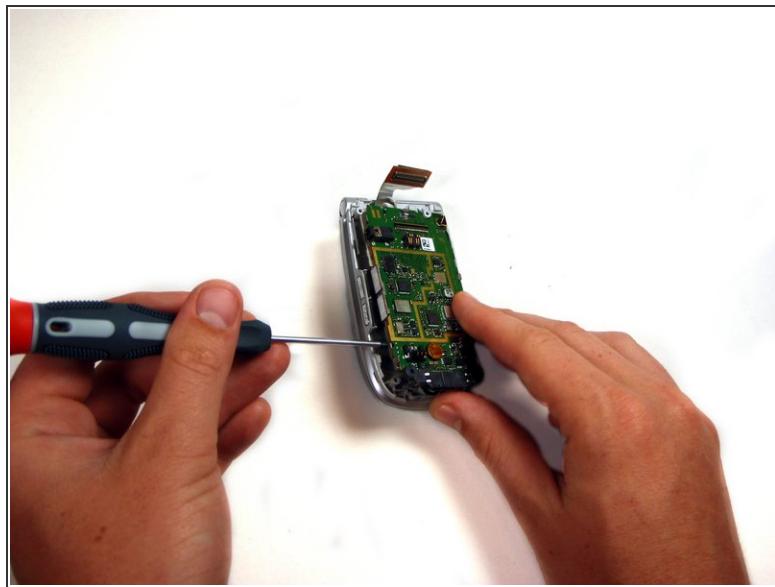

- Use a flathead screwdriver to gently pry the logic board and keypad from the device.

Step 6

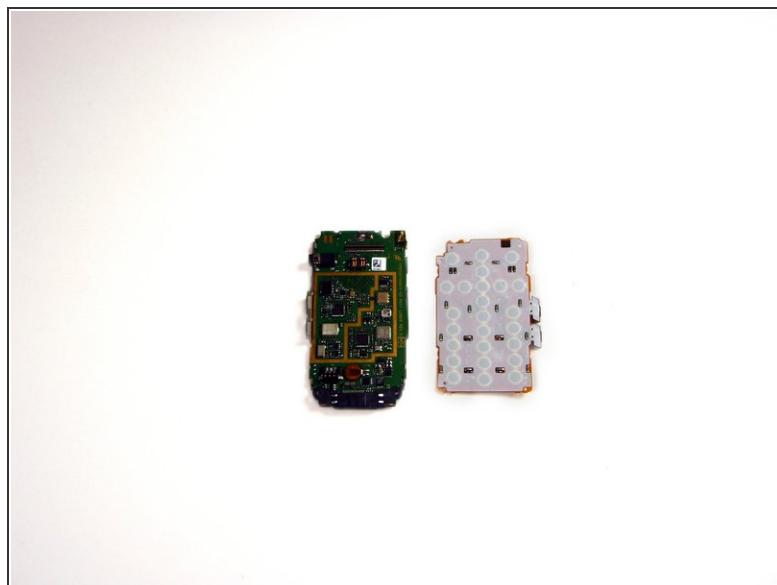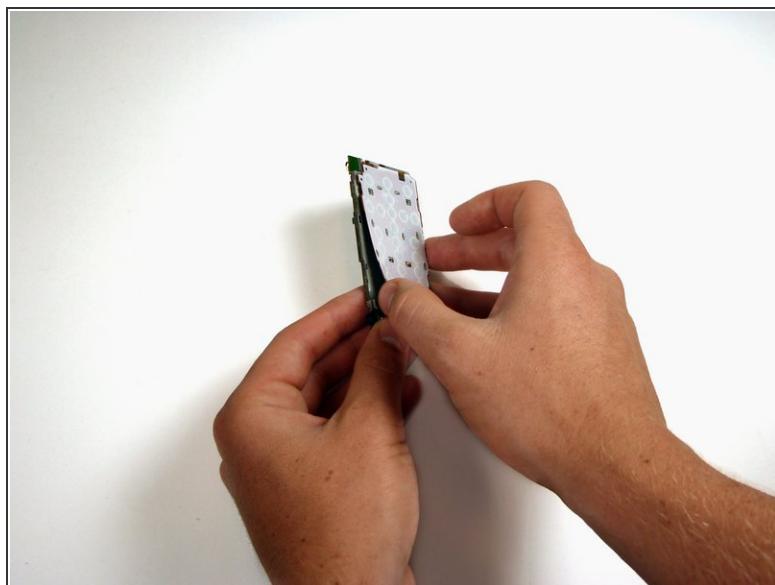

- Peel the keypad from the logic board using your thumb.

To reassemble your device, follow these instructions in reverse order.