



Toshiba NB205 N330PK Keyboard Replacement

This guide outlines how to remove and replace the keyboard assembly (3 Steps).


Written By: Mason McCaskill



 **TOOLS:**


- [Spudger \(1\)](#)

Step 1 — Power Button

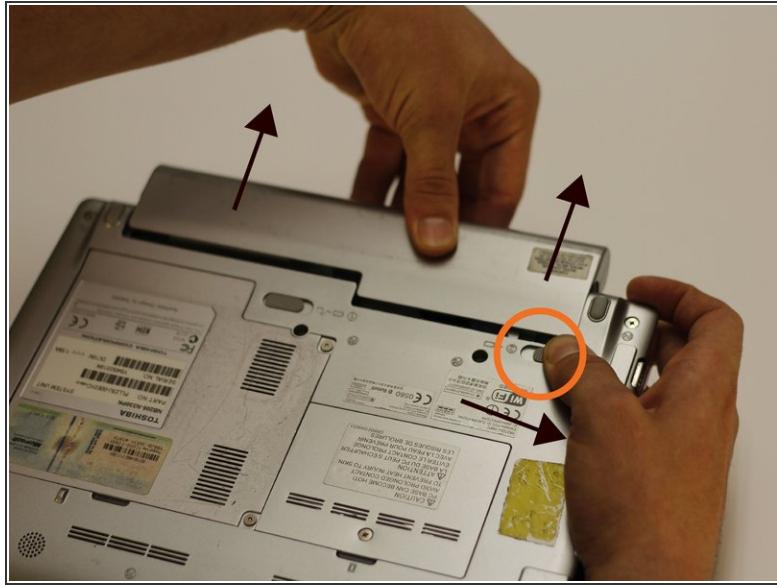



- Start by first removing the battery.
- Move the first release switch to the right position.
- Move the second release switch to the right position while pulling the battery towards the top of the netbook.

Step 2

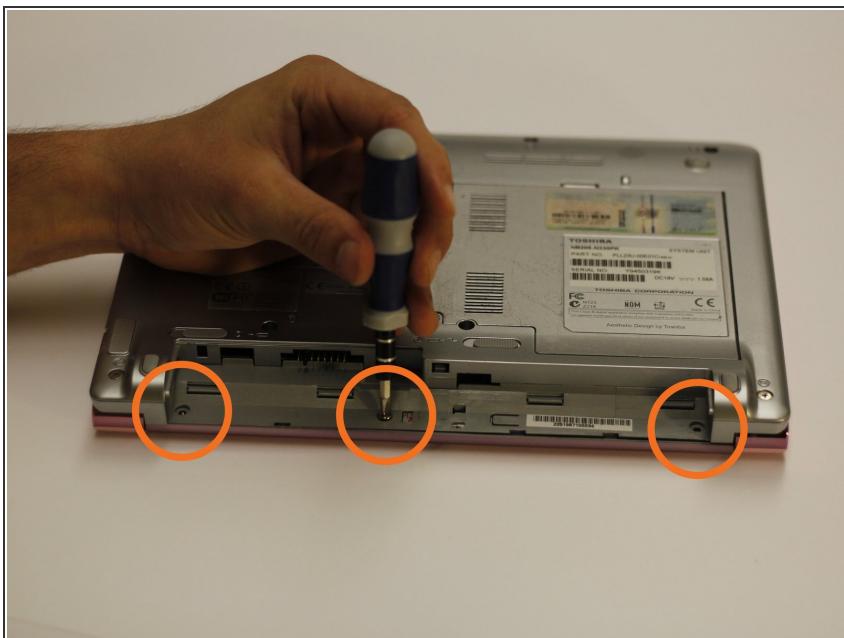


- Using the bit driver and a Phillips #0 bit, remove the three circled screws, 5 mm in length.

Step 3

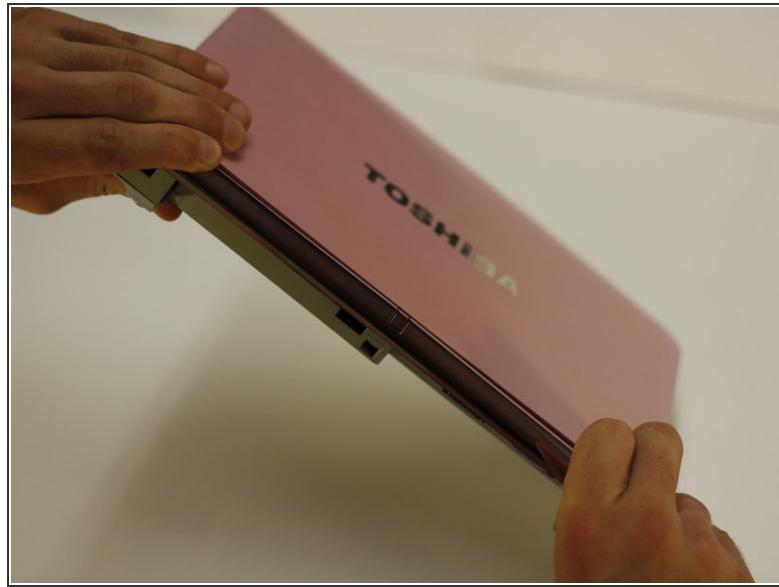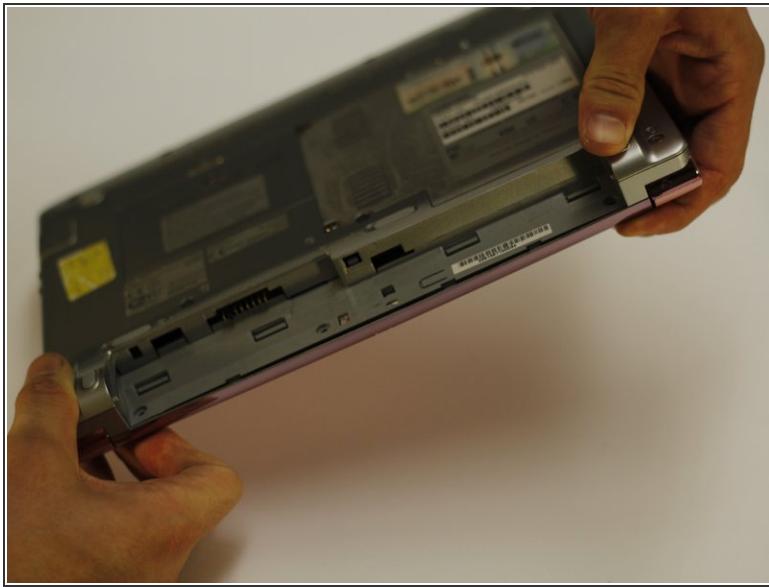



- While holding the top of the netbook, flip the netbook over.

Step 4

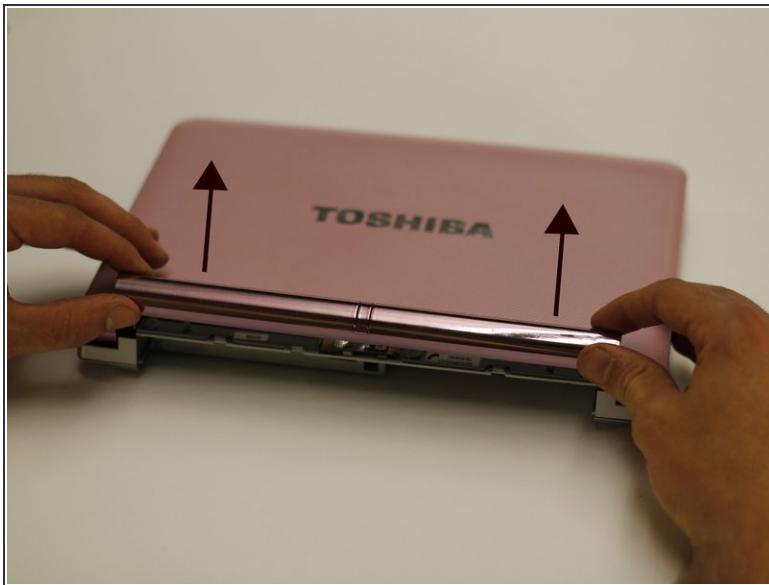



- Carefully lift off the power bar assembly for access to the button and receiver.

Step 5 — Keyboard

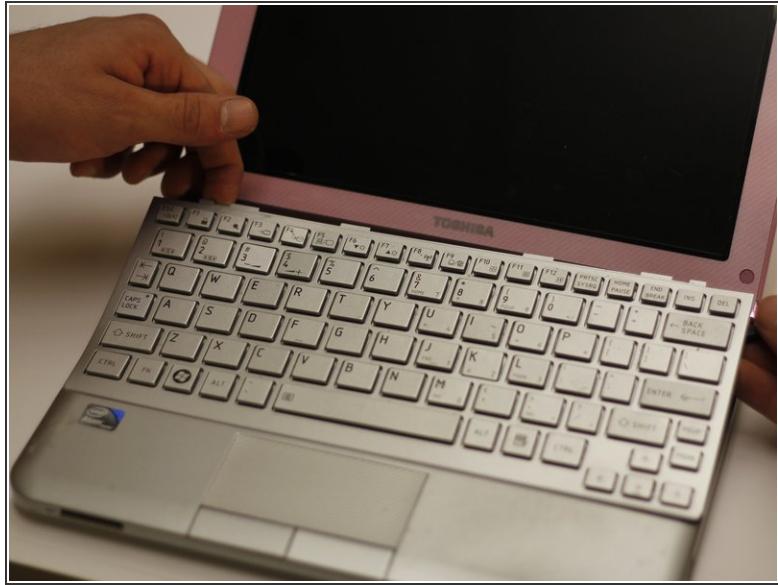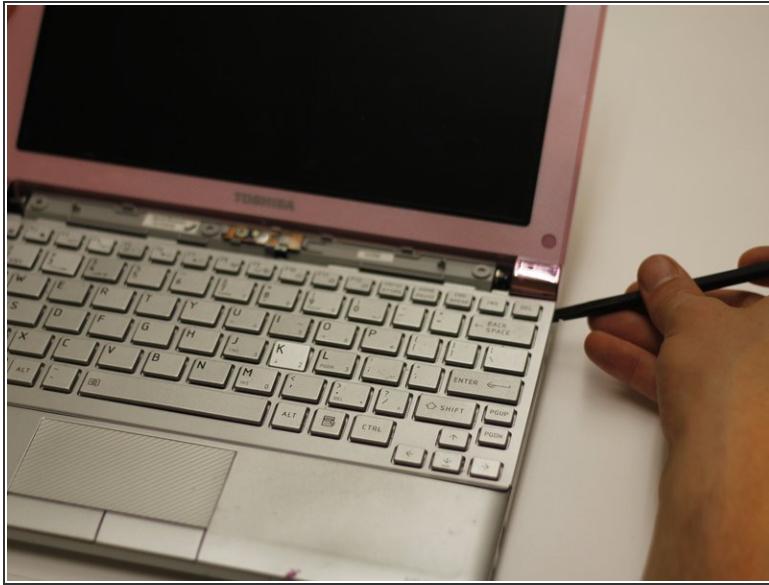


- Use the spudger to gently pry around the keyboard. This will release the keyboard assembly from the body.

Step 6

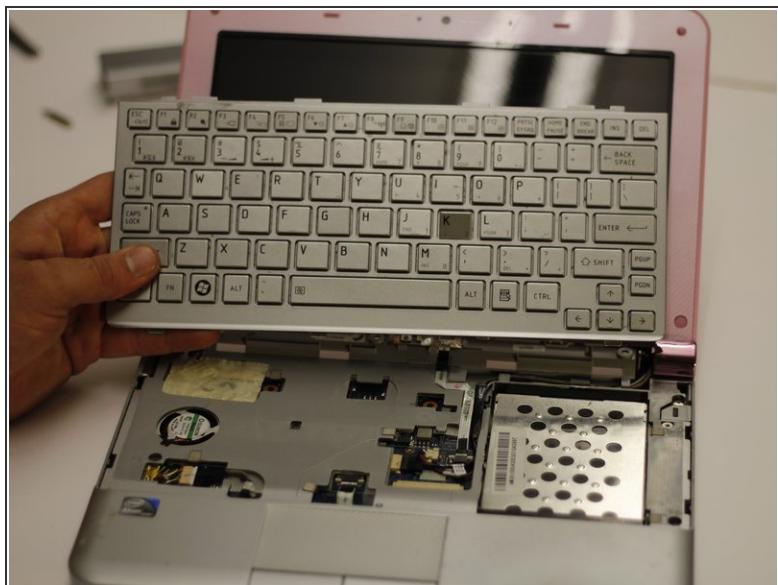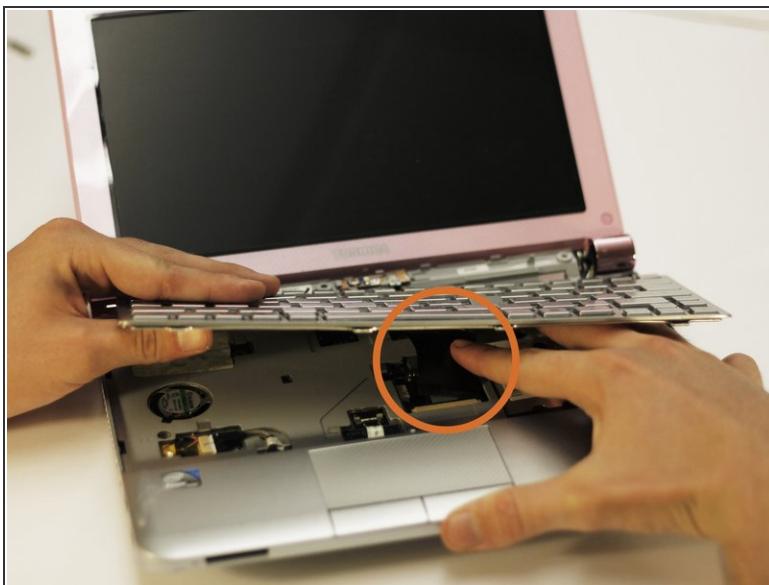

- Reach under the keyboard and disconnect the electrical connection.
- Lift the broken keyboard off.

Step 7

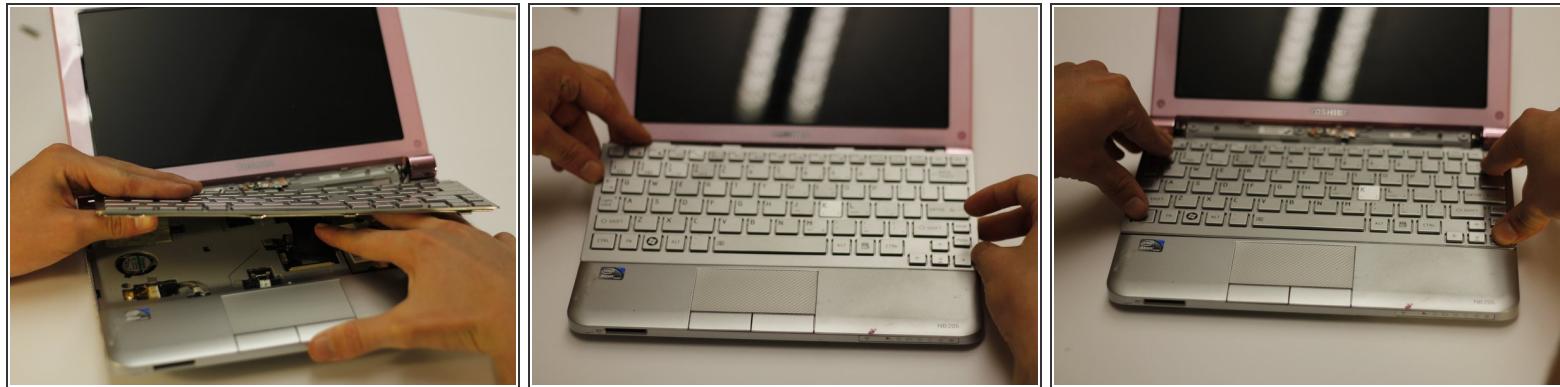

- Reattach the new electrical connection into the old connection location.
- Place the keyboard into the original location starting with the bottom first.
- Gently press the keyboard down to secure it into its original location.