




Toshiba Qosmio X305-Q704 Screen Replacement

This guide will allow you to remove a dysfunctional screen from your Toshiba Qosmio X305-Q704 and replace it with a new one.

Written By: John Borden

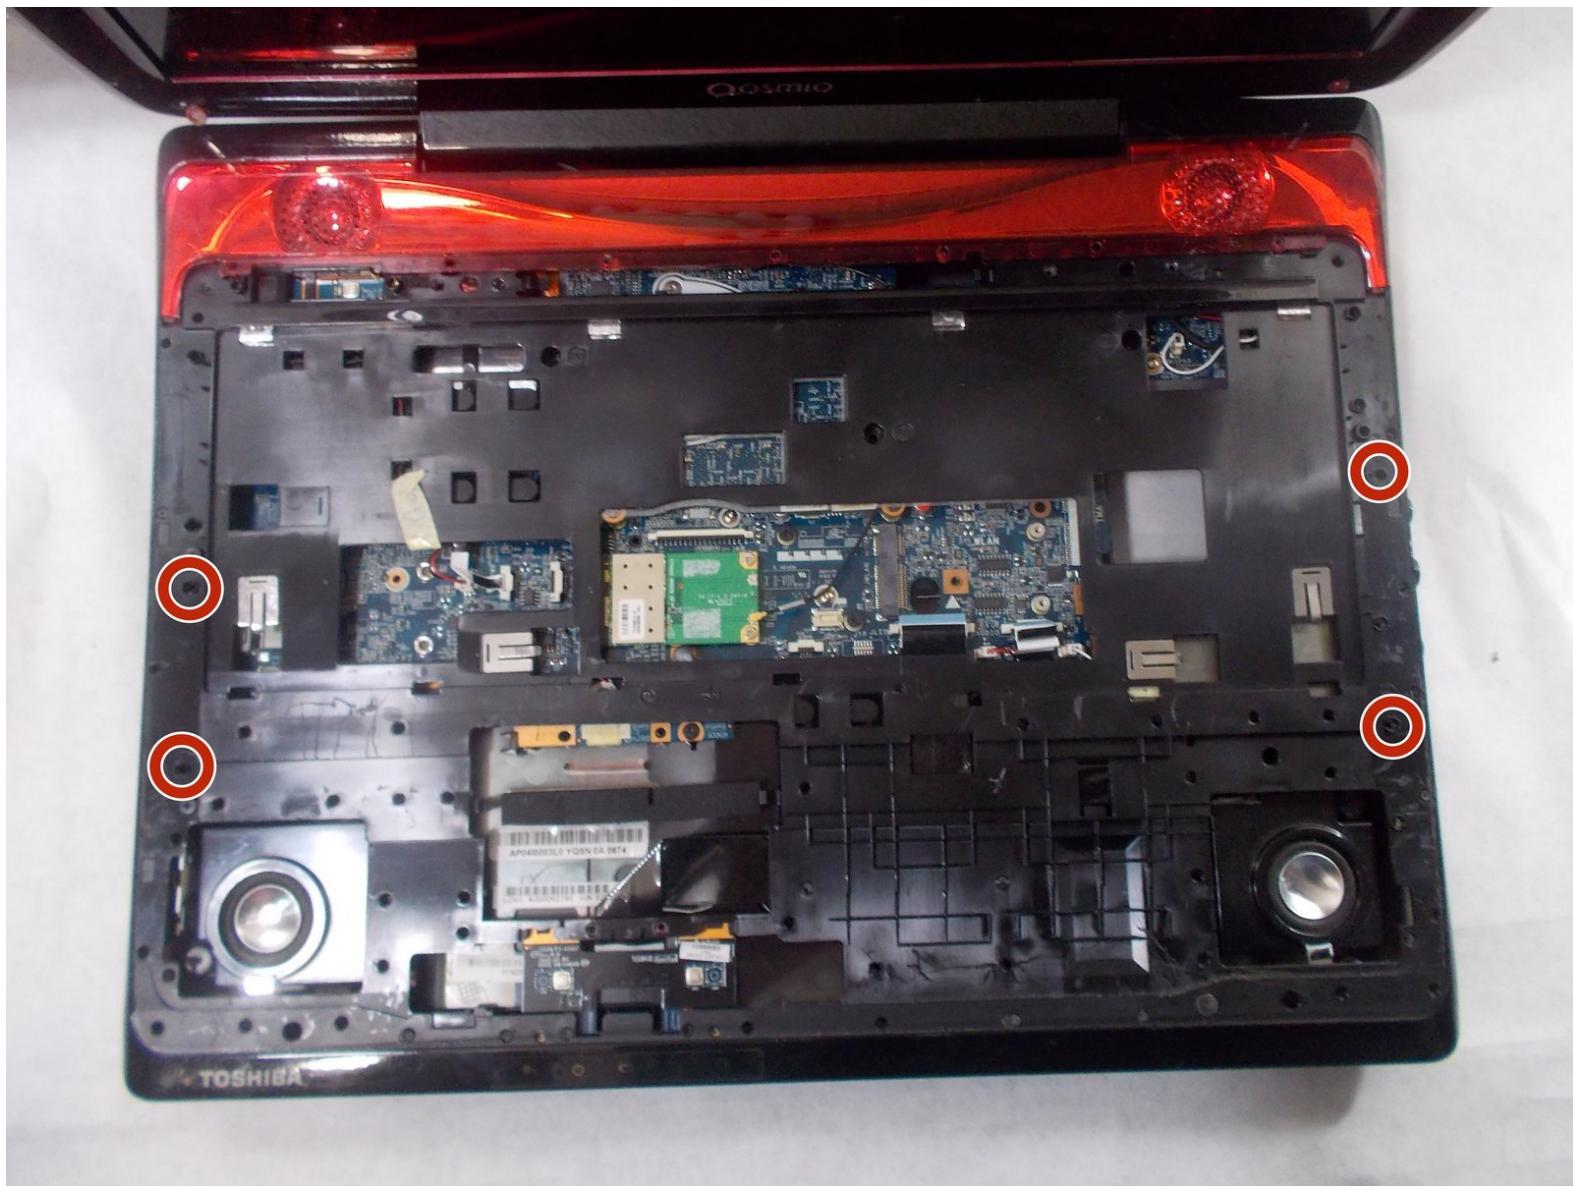

This document was generated on 2020-04-04 09:10:29 PM (MST).

INTRODUCTION

This guide will show you how to properly replace the screen on your device. Prerequisites include keyboard and battery replacements.

TOOLS:


- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)

Step 1 — Keyboard



- Find an edge of the red strip along the edge the computer and pry it off using a spudger.

Step 2

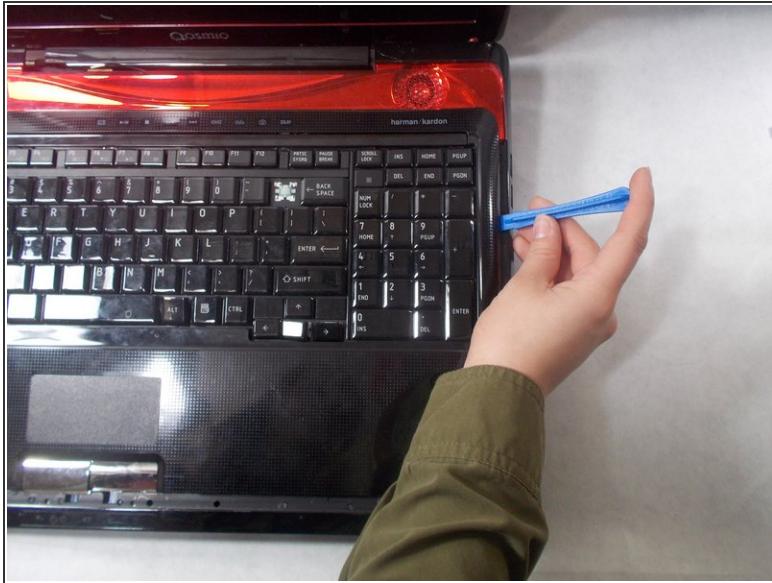


- Find an edge of the black cover piece around the keyboard and pry it up using the spudger.

Step 3




- Lift the keyboard up and detach the strip connecting the keyboard to the back of the laptop.

Step 4

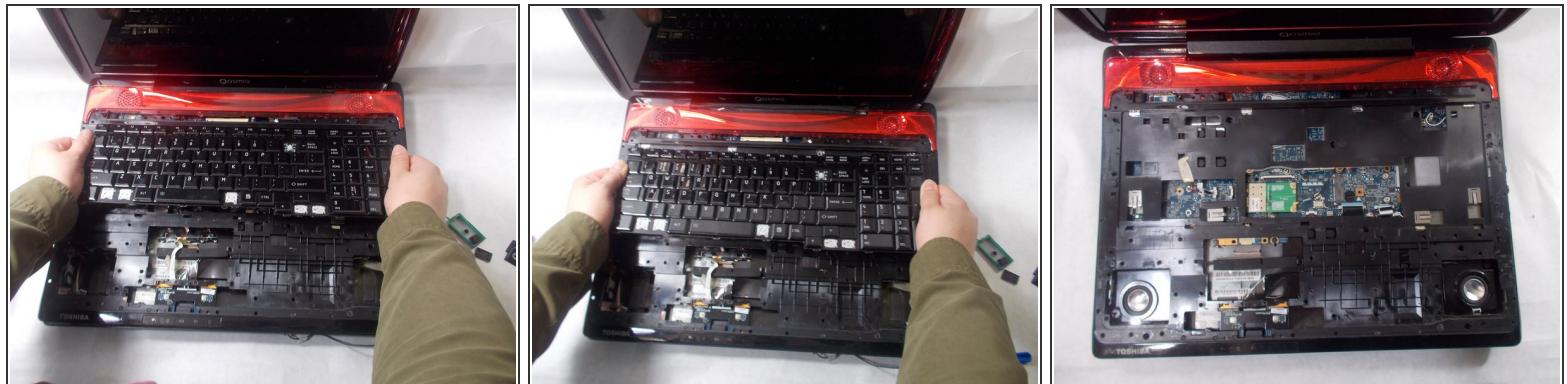


- Remove the keyboard from the Laptop.

Step 5 — Screen

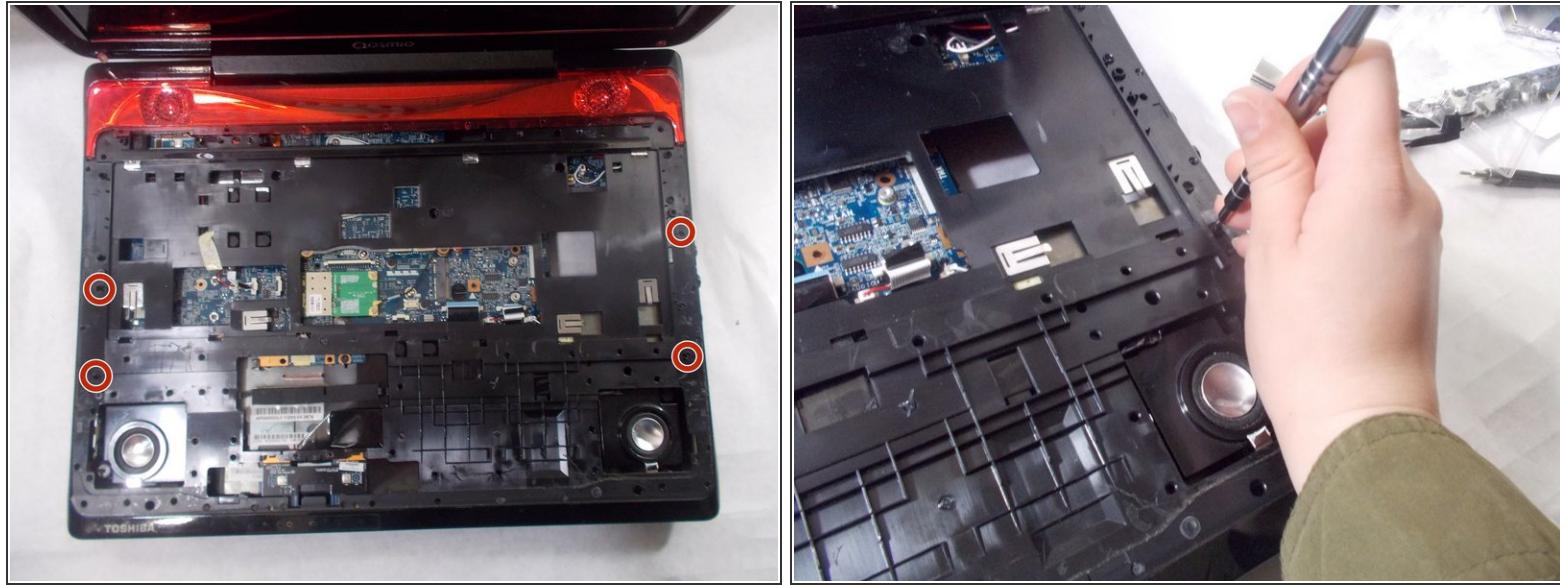

- Unscrew the four 10 mm screws with the Phillips #0 screwdriver.



Step 6

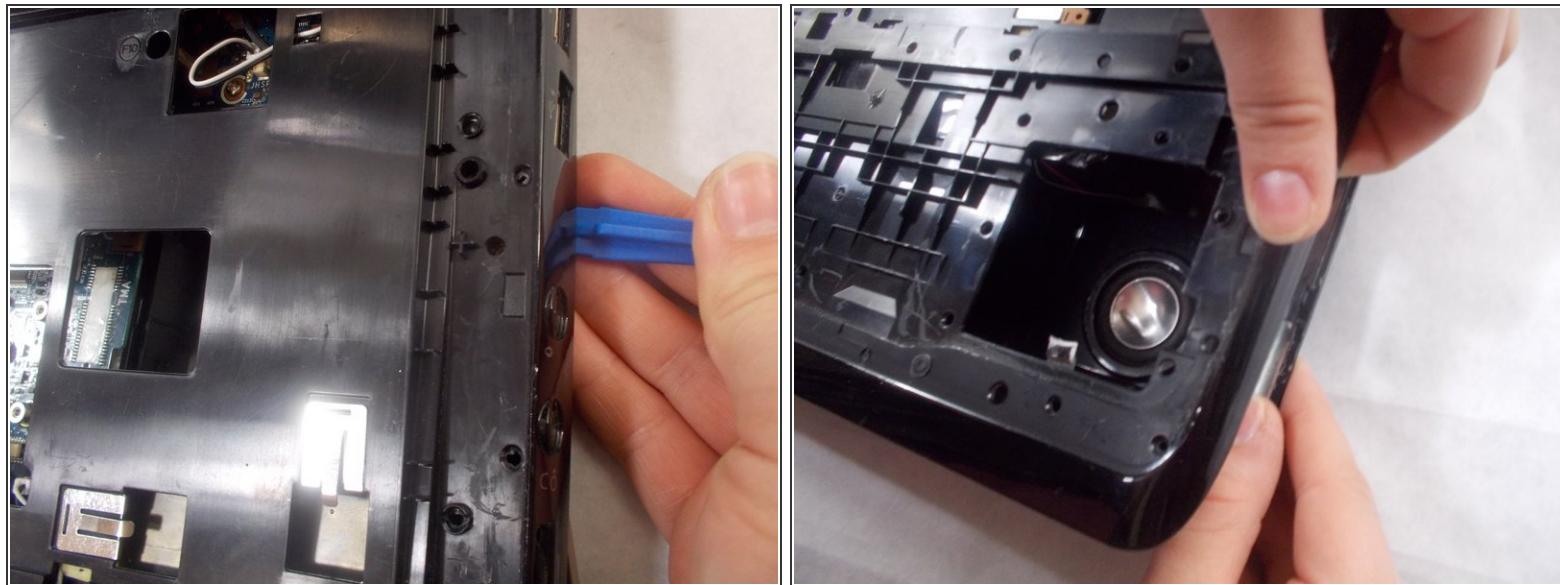

- Insert the iFixit opening tool into the side of the computer that separates the top and bottom of the laptop. Move the tool along the edge of the laptop until the cover can be separated from the device.



⚠ Do not remove the panel from the device, as you'll need to disconnect cables before the component can be fully removed.

Step 7

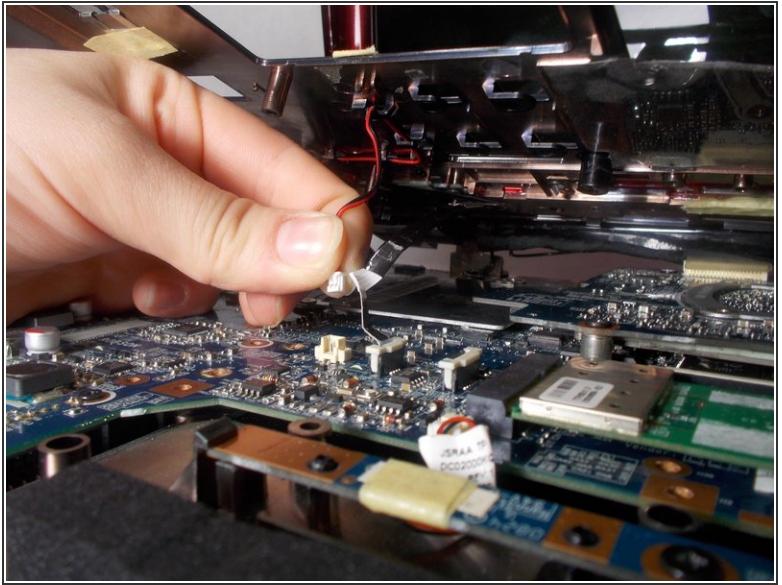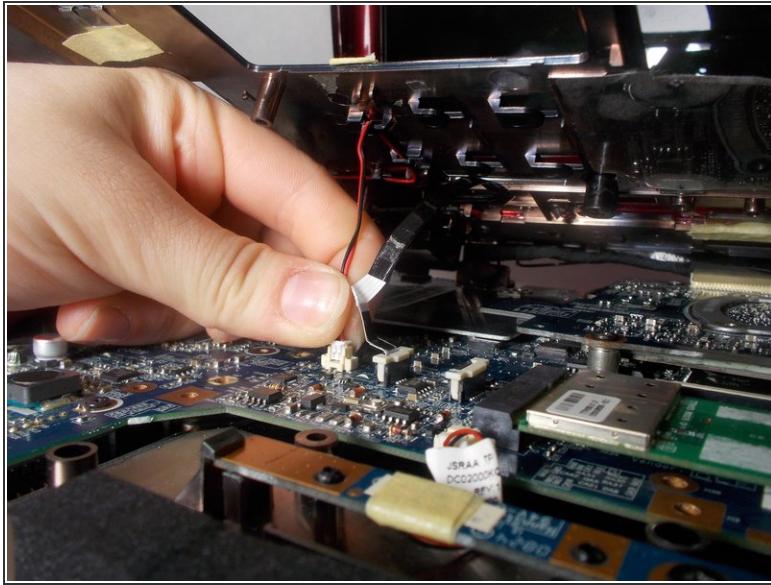


- Disconnect all wires connecting the top piece to the bottom.

Step 8

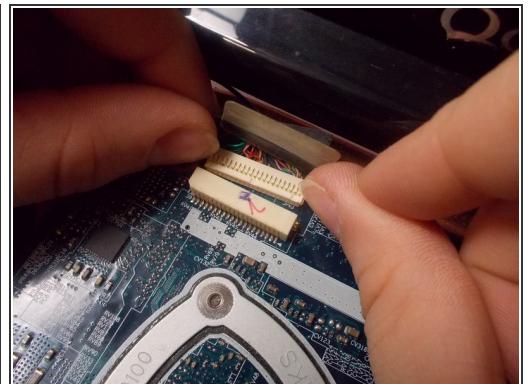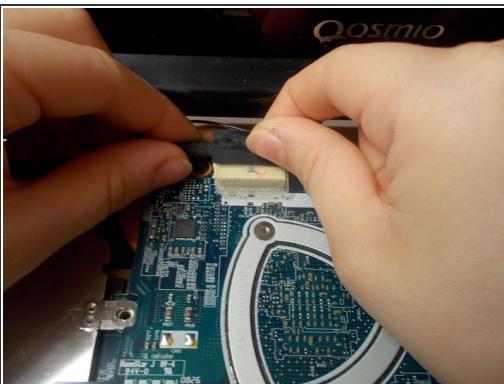


- Disconnect all wires connecting the screen to the inside of the computer.

Step 9

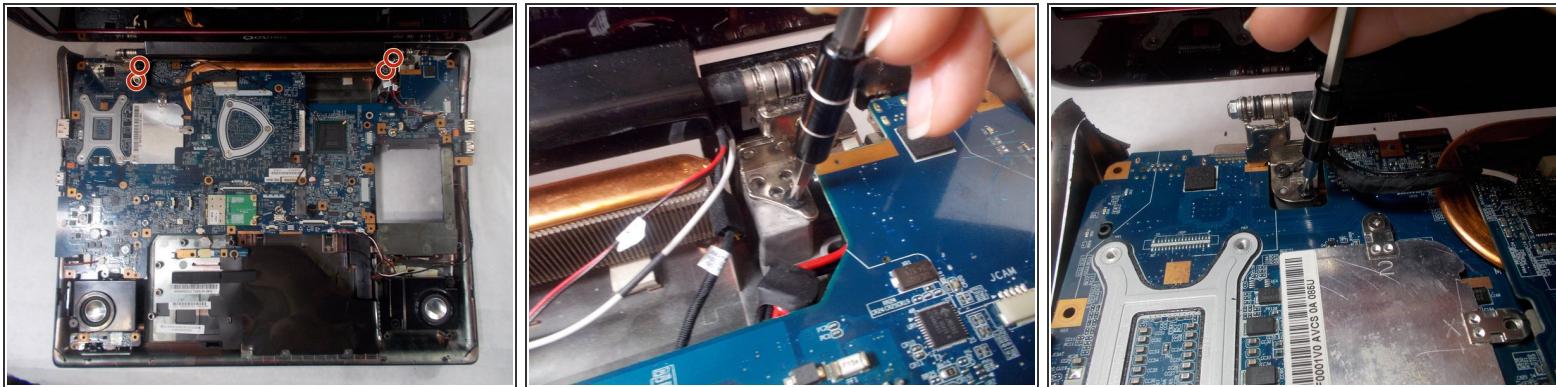

- Remove the 6 mm screws holding the screen on to the laptop using a Phillips #0 screwdriver.

Step 10

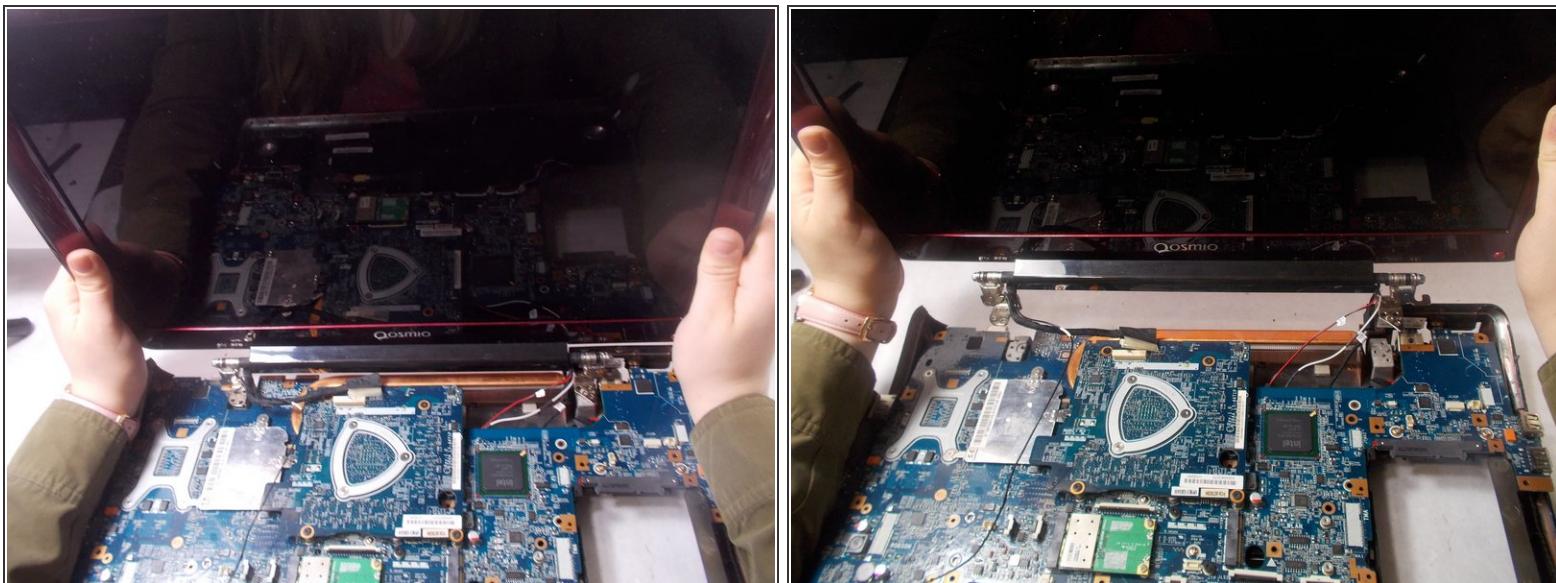

- Remove the screen from the laptop.

To reassemble your device, follow these instructions in reverse order.