



# Toshiba Satellite A660-ST3NX2X Screen Replacement

Replace your damaged screen to bring the display back to your Toshiba Satellite.

Written By: Megan Murrell



## INTRODUCTION

This replacement guide is to walk you through a screen replacement on your Toshiba Satellite A660-ST3NX2X. Before starting this replacement, make sure you have a replacement screen that is made for this computer. Also, make sure the computer is powered off and completely shut down before completing this replacement.

### TOOLS:

- [JIS Driver Set \(1\)](#)  
J000

## Step 1 — Battery



**⚠** Unplug all cables and other devices from the computer before starting this replacement.

- Turn the computer over, so the screen is facing down and the battery is positioned in front of you.

## Step 2



- Locate the two sliding tabs on either side of the battery.
- Using both hands, place one finger on each tab and slide them to the sides and away from each other.

## Step 3



- Pull the battery out, keeping the tabs pushed to the side.
- *(i)* The right tab on this laptop stayed pushed to the right without needing to be held in place.


## Step 4 — Screen



! Unplug all devices and power down the computer completely.


- Peel back all four circular stickers that are located at each corner of the computer frame.
- A pair of fine point tweezers was used to complete this.

## Step 5

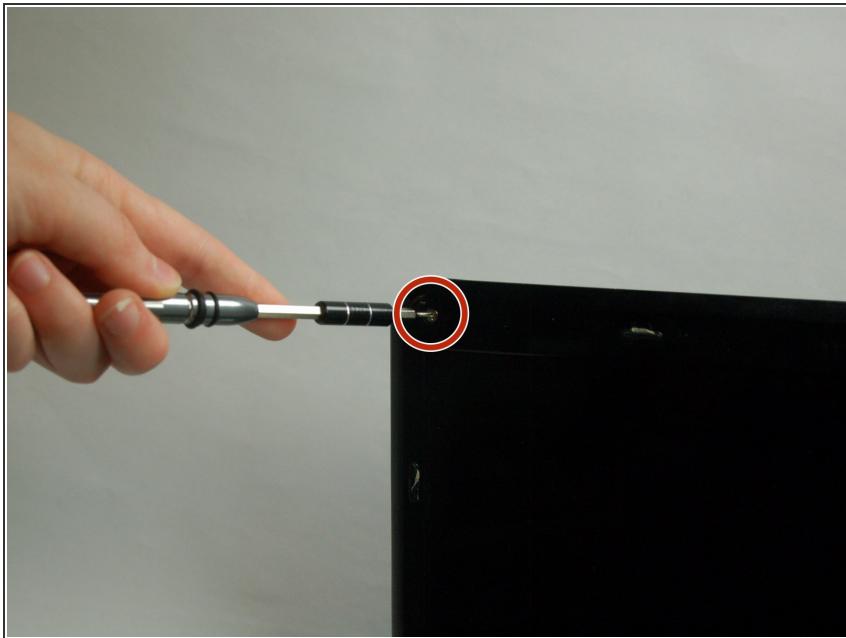

- Unscrew all four 5mm screws located underneath the stickers in each corner of the computer frame.
- The computer frame should become more loose after the screws are removed.

## Step 6

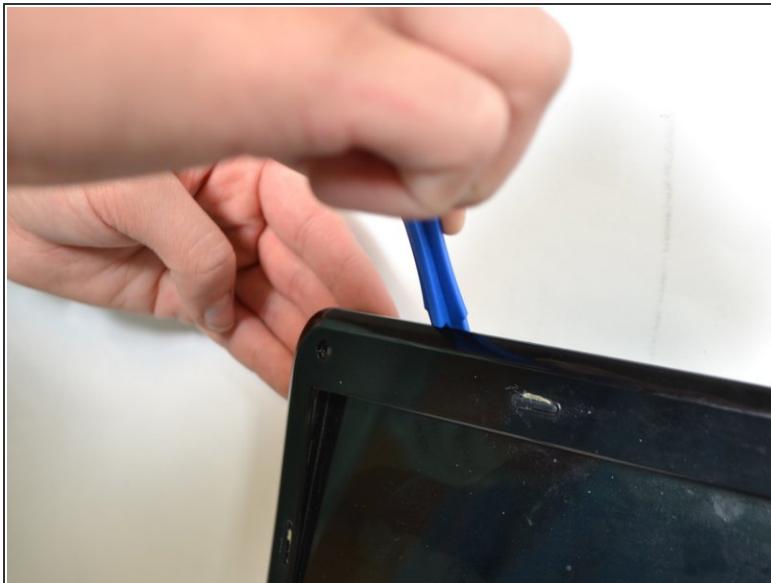


- Pry the frame of the screen away from the computer.
- A prying tool was used by inserting it in the crack between the frame and the screen and running it along the edges of the frame.

## Step 7



- Unscrew the three black 4mm JIS screws on each side of the metal frame that is still attached to the side of the screen.
  - Only two screws are shown in the image.
- The metal frame will completely separate from the computer screen.

## Step 8

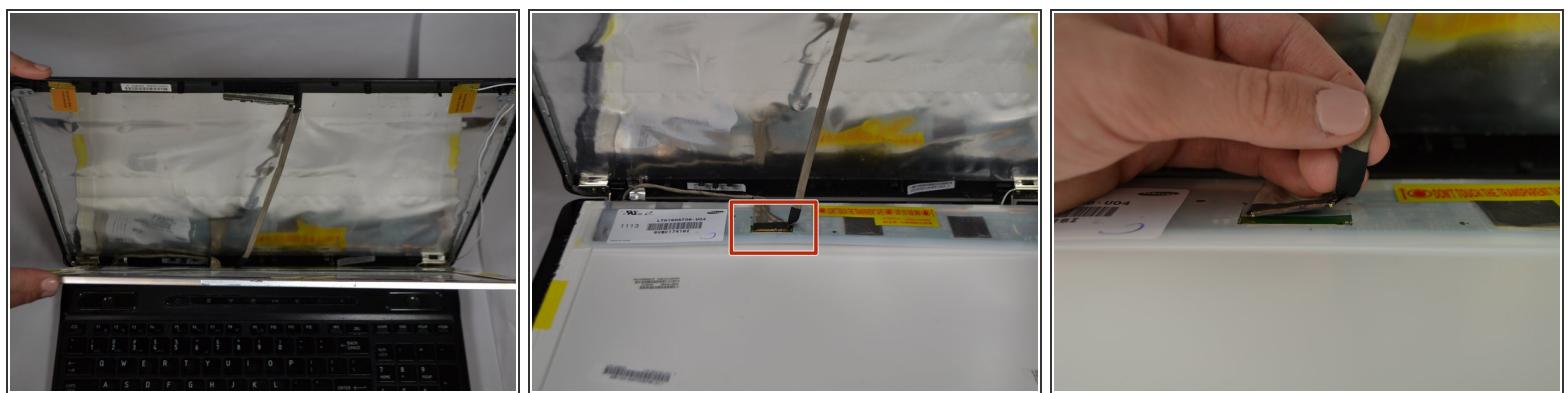

- Position the screen in a way that the aluminum backing is exposed.
- Peel off the metal-like attachment from the back of the screen.

To reassemble your device, follow these instructions in reverse order.