




Toshiba Satellite C55-A5140 Keyboard Replacement

Replacement of an unresponsive or damaged laptop keyboard

Written By: Cameron Chapman

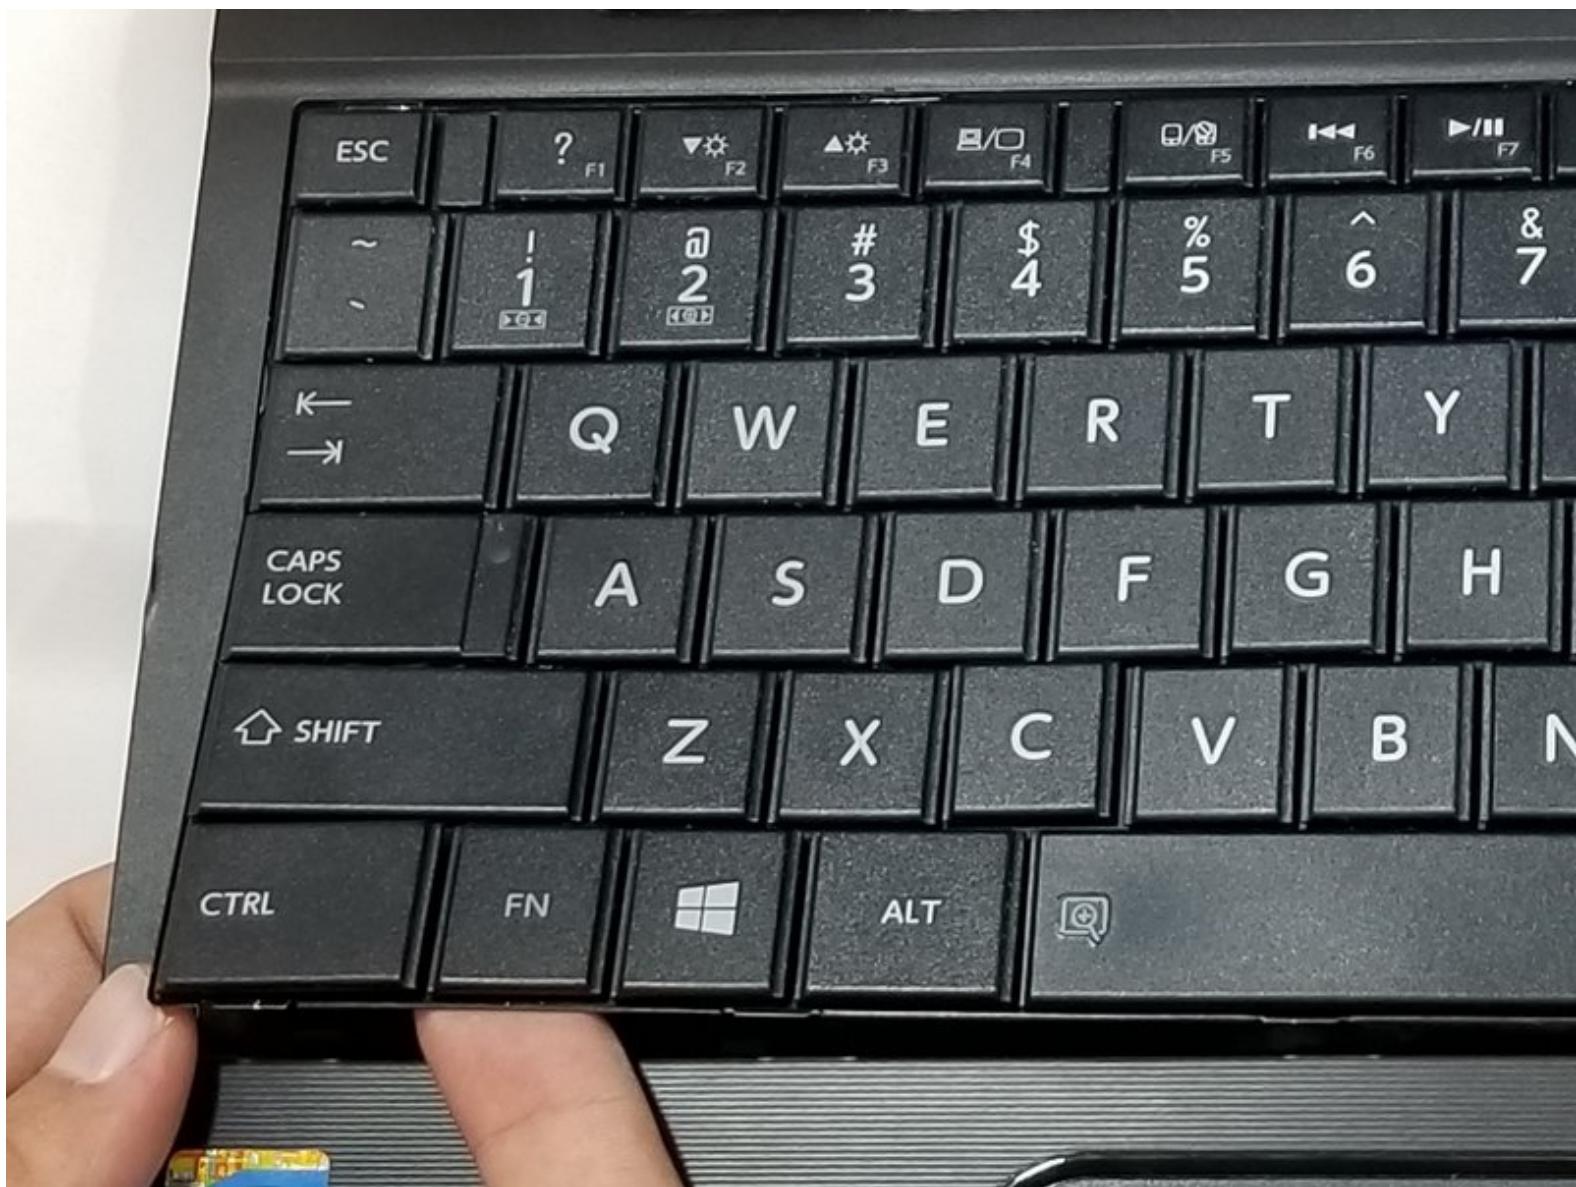


INTRODUCTION

It is common for a laptop keyboard to stop working properly. This can be because factory defect, dirt and grime, liquid, or wear and tear. Before attempting to remove the keyboard make sure you have a replacement keyboard available. Once the existing keyboard is removed from the laptop, it can no longer be reinstalled.

TOOLS:

- [iFixit Opening Tools \(1\)](#)

Step 1 — Keyboard


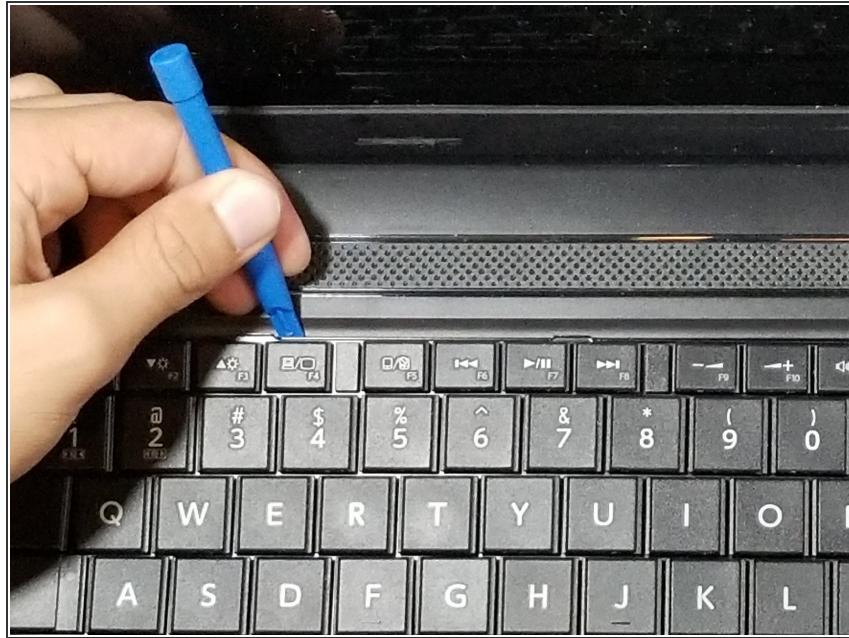


- Make sure that the device is unplugged, completely off, and that the device is not warm to the touch.
- Working from left to right, use plastic opening tool to lift keyboard up and out of recessed holding tray.
- Continue to pry around the entire keyboard until it is loose enough to easily slide your fingers underneath the corners of the keyboard.

i Once existing keyboard is removed, it can no longer be reinstalled. Be sure to have new keyboard available for installation.

i Keyboard will make a snapping sound as it is freed from tray.

Step 2

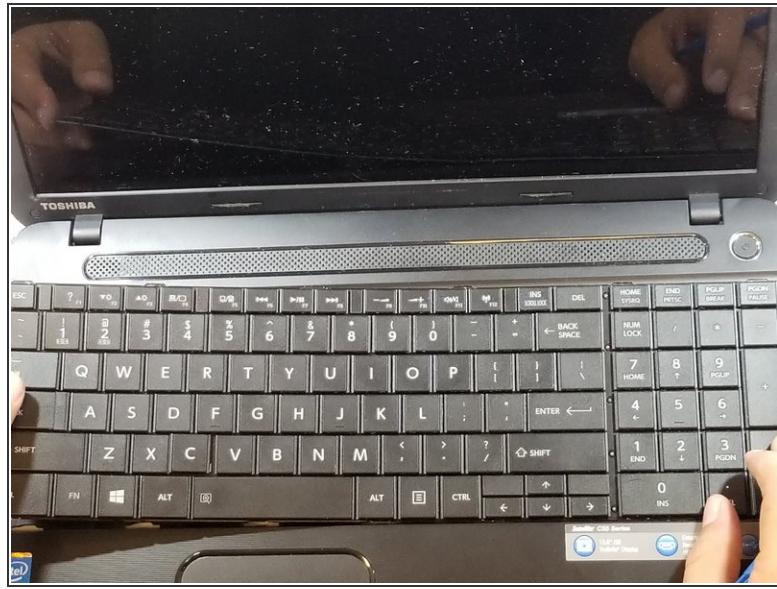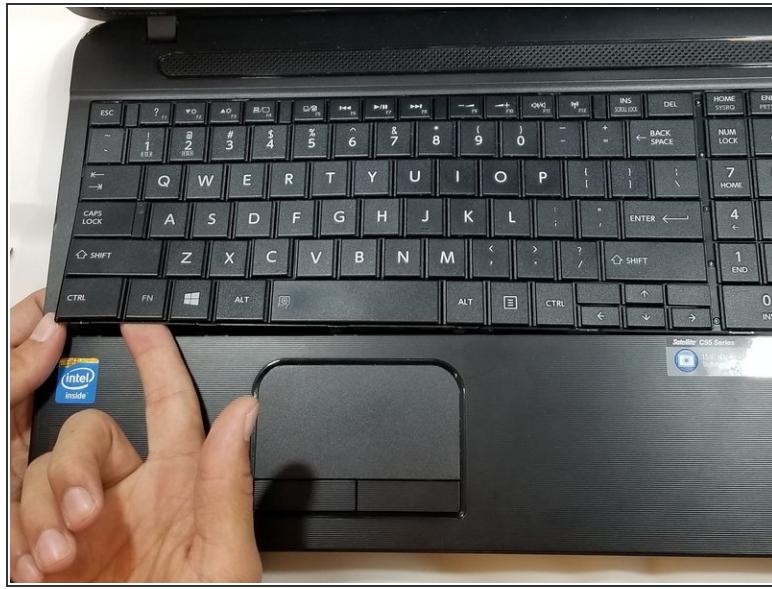

- Using hands, gently pull keyboard out of device.

To reassemble your device, use tabs on new keyboard to snap into keyboard tray