



Toshiba Satellite C55-A5310 RAM Replacement

How to replace the Toshiba Satellite C55-A5310 RAM.

Written By: Kari Rodgers



CAUTION
PC BASE CAN BECOME
EXTREMELY HOT
AVOID PROLONGED
CONTACT WITH SKIN
ATTENTION
LA BASE DU PC PEUT
ÉTRE TRÈS CHAINE
ÉVITER LE CONTACT
AVEC LA PEAU POUR
LES RISQUES DE BURN

 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Spudger \(1\)](#)
- [JIS #000 Screwdriver \(1\)](#)

Step 1 — Battery



- Push the left tab with your left hand.
- Then push the right tab with your right hand.
- While your right hand is still pushing, remove the battery with your left hand.

Step 2 — RAM

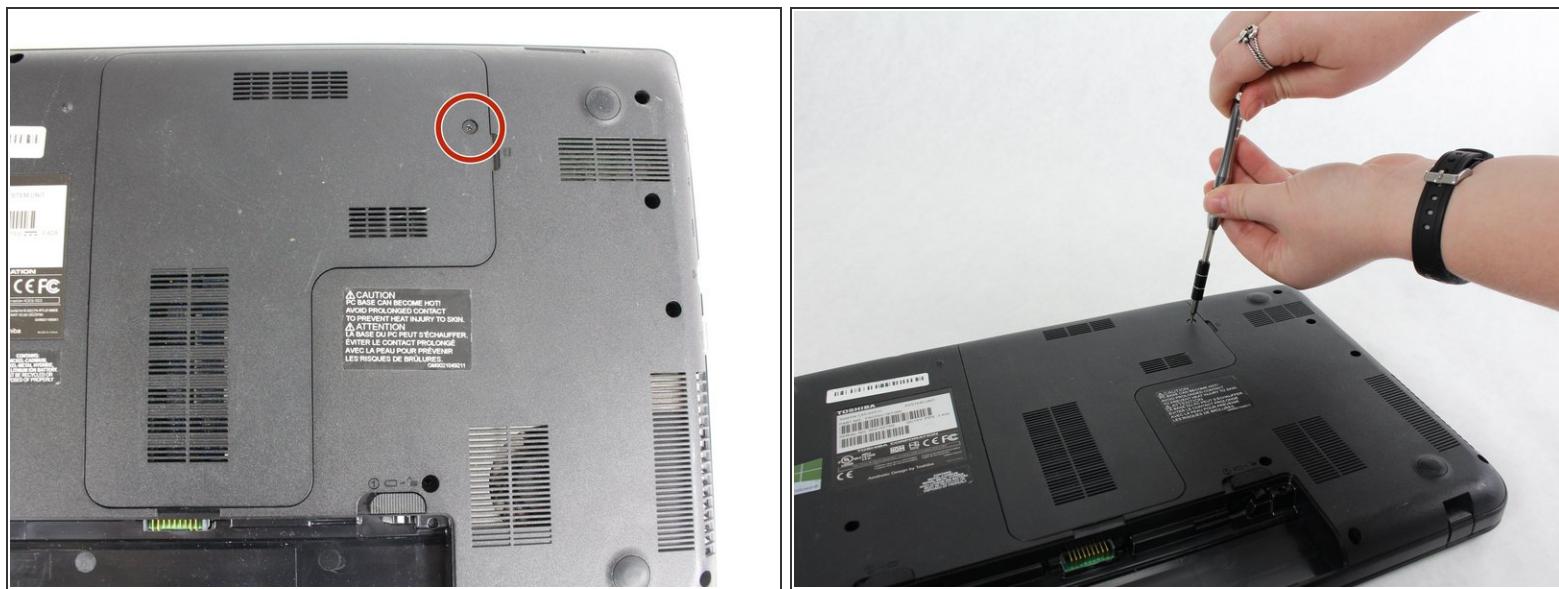

- Remove one JIS #000 screw.


(i) This screw does not come out all the way, but you will still be able to open the back panel.

Step 3



- Use the plastic opening tool to pry the panel open. Be sure to do this on all four sides. Then the panel will lift off.

Step 4

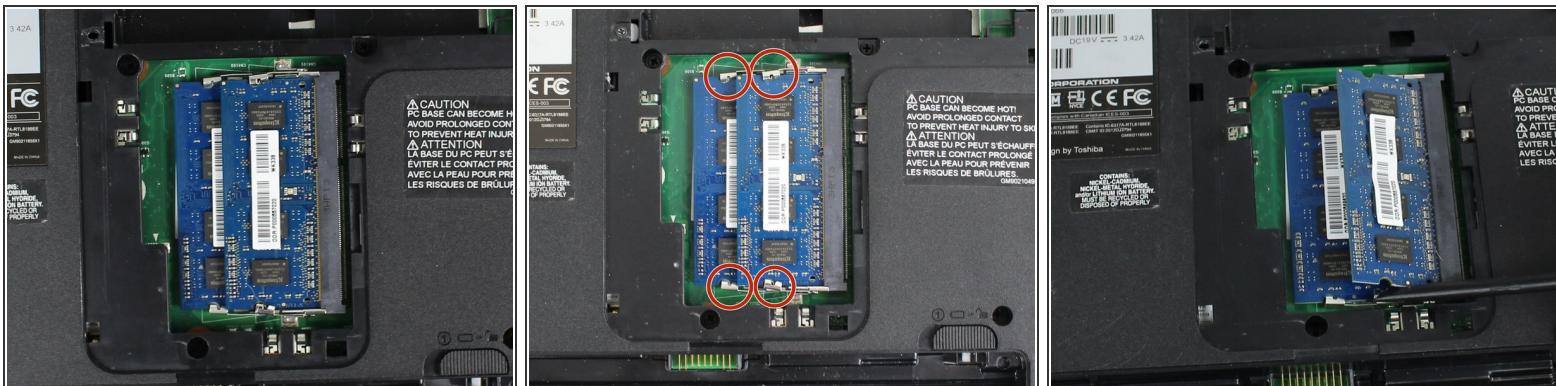

- Take the nylon spudger, and push the prongs so that it releases the RAM.

Step 5



- Once the RAM has lifted, use tweezers or fingers to pull it out.

To reassemble your device, follow these instructions in reverse order.