Toshiba Satellite C55-C5268 Back Panel Replacement Guide

Most components in need of replacement or repair will be behind the back panel of the Toshiba Satellite.
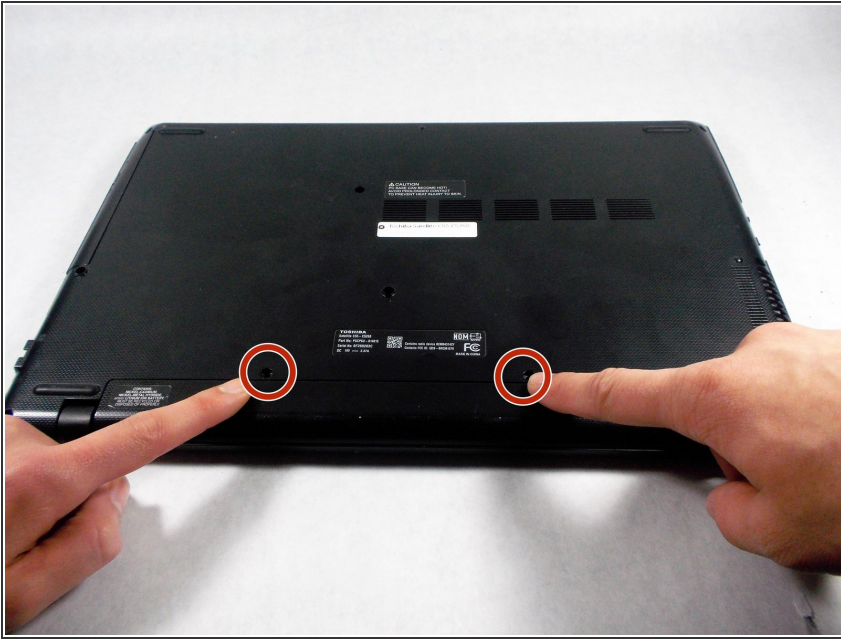
Written By: Ben Rounseville

INTRODUCTION

This guide will show you how to successfully remove the back panel to gain access to these components.
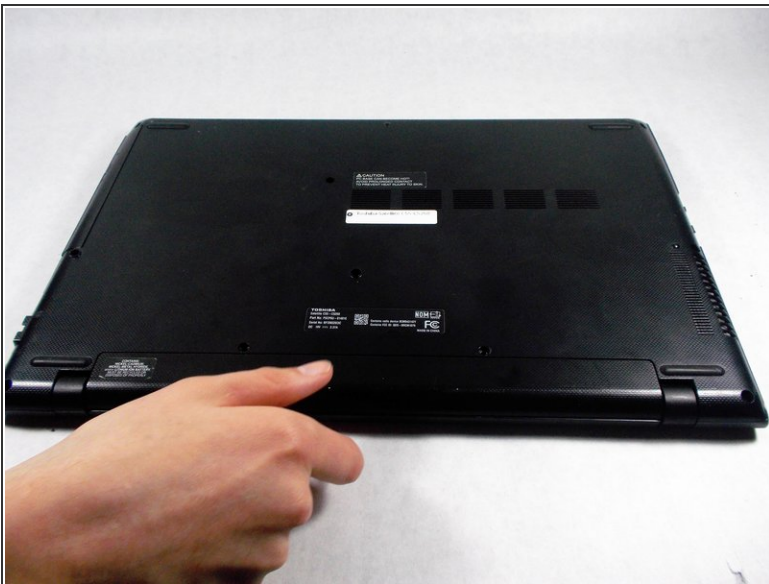
�’ TOOLS:

- Phillips #1 Screwdriver (1)
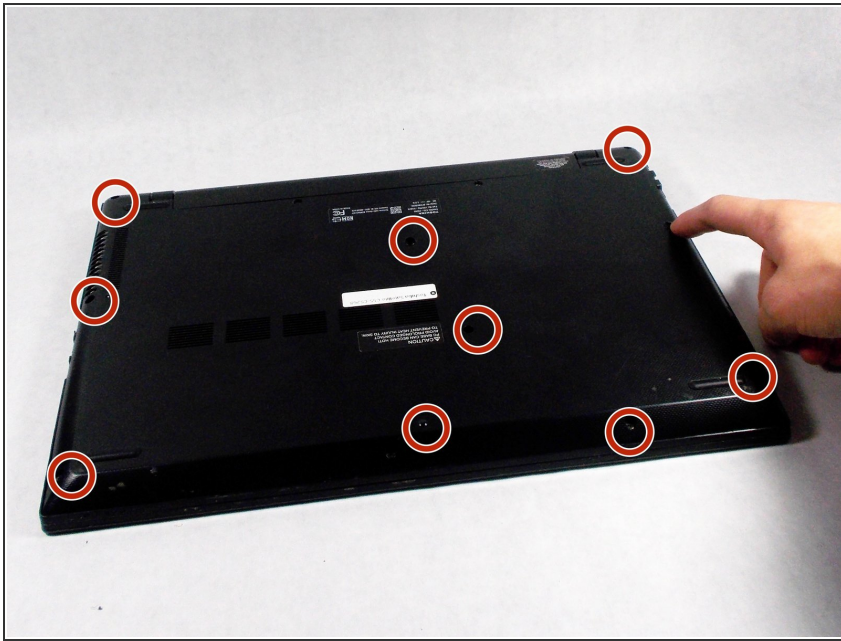- Spudger (1)

Step 1 — Battery

- (i) Unplug and power off the laptop.

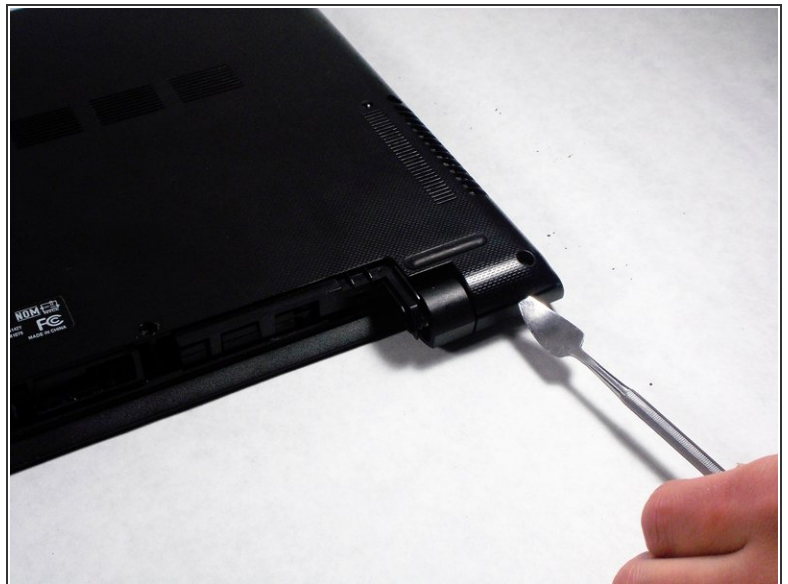- Unscrew the two 9 mm Phillips #1screws holding the battery in place.

Step 2

- Grab the battery and pull it away from the laptop to remove it.

- (i) This doesn't require a lot of effort, so you don't have to pull too hard.

This document was generated on 2019-09-22 06:23:05 PM (MST).

Step 3 — Back Panel

- Unscrew the 10 9.0 mm screws holding the back panel on using a Phillips head #1 screwdriver.

Step 4

⚠️ Using a metal spudger can damage sensitive components.

- Insert a metal spudger tool in the seam between the back cover and the laptop itself. Gently run the spudger around the edge to pop the cover off.

This document was generated on 2019-09-22 06:23:05 PM (MST).

Step 5

- Pry up the back panel from the rest of the laptop using a spudger.

- (i) It is best to start around the USB port and work your way around the edge until the panel completely snaps off.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-22 06:23:05 PM (MST).