



Toshiba Satellite L55-A Battery Replacement

Remove and replace the primary lithium-ion battery for the Toshiba L55 laptop.

Written By: Arthur Shi



INTRODUCTION

This guide shows how to remove and replace the lithium-ion battery for the Toshiba L55 laptop. If your battery is swollen, [take appropriate precautions](#).

TOOLS:

- Phillips #1 Screwdriver (1)
- iFixit Opening Tools (1)
- iFixit Opening Picks set of 6 (1)

PARTS:

- Toshiba PA5107U-1BRS Replacement Laptop Battery (1)

Step 1 — Remove the RAM cover



(i) Before you begin, be sure to power down your laptop.

- Flip the laptop over so that the back cover is facing up.
- Unscrew the captive Phillips screw securing the RAM cover.

Step 2



- Lift up the edge of the RAM cover and remove it.

Step 3 — Disconnect the ethernet connector cable



- Use an opening tool to pry up the ethernet connector cable from its socket near the RAM module.
- Disconnect the cable.

 During reassembly, make sure you re-insert this connector right-side-up. The connector is keyed to plug in only one orientation, so if it doesn't slide into place easily, turn it around and try the other way.

Step 4 — Remove the back cover



- Remove the thirteen 6.8 mm long Phillips screws securing the back cover.

Step 5



- Insert the point of an opening pick in the seam between the SuperMultiDrive and the rest of the back cover.
- Push the SuperMultiDrive's lip away from the back cover to disconnect the drive.
- Slide the drive out of the bay and remove it from the laptop.

Step 6



ⓘ The back cover is still held in place by plastic clips.


- Insert the point of an opening pick into the back cover seam near the ethernet port.
- Twist the pick to release the plastic clips along the edge.

Step 7




- Grasp the loosened back case edge with your hand and lift it slowly away from the laptop. The remaining clips should release with ease.
 - ⓘ If you meet significant resistance, **stop** and check for forgotten screws.
- Remove the back cover.
 - ⓘ To reinstall the back cover, align the cover and press along the edges to snap the clips back in place.

Step 8 — Unscrew the battery

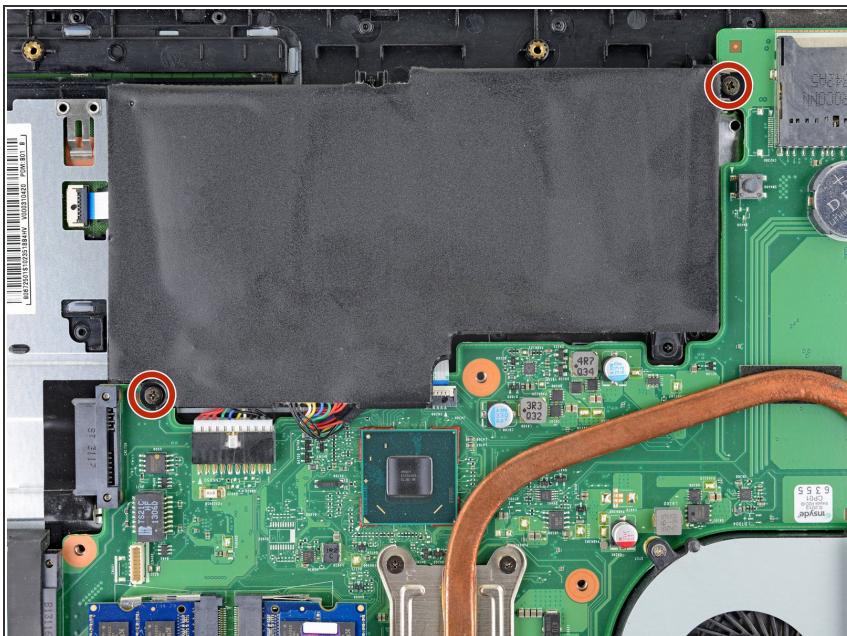


- Remove the two 6.8 mm long Phillips screws securing the battery.

Step 9

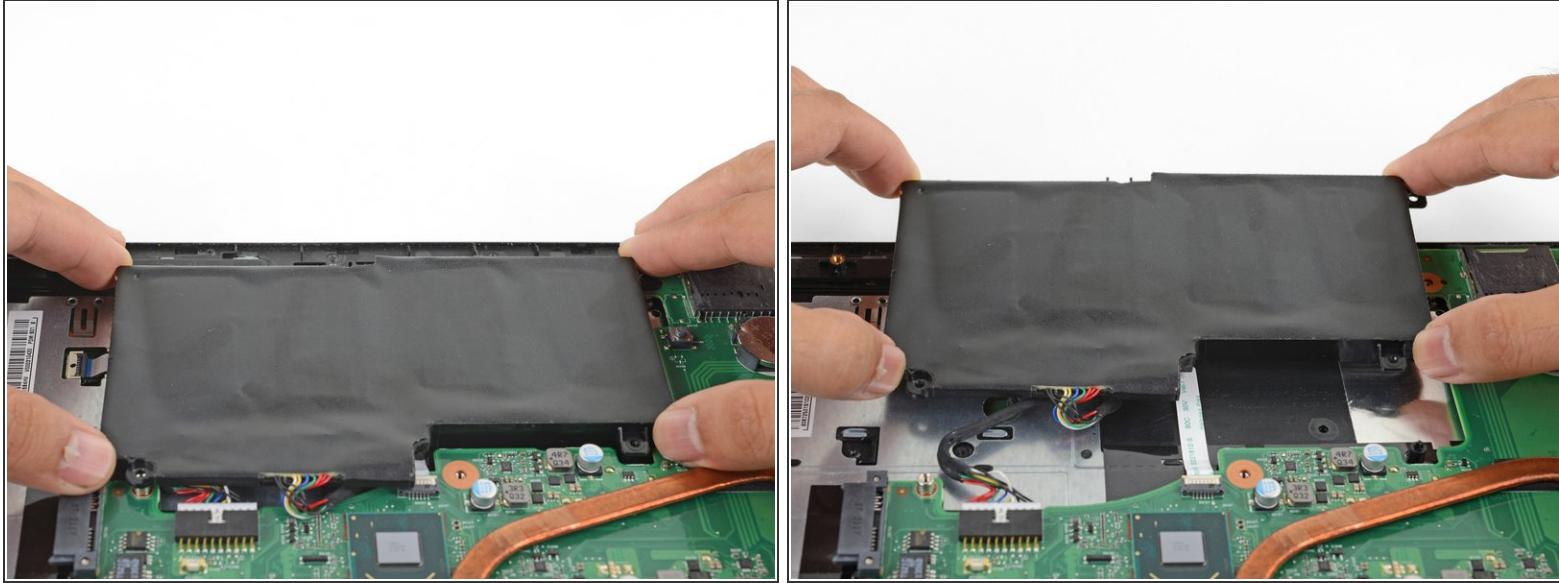

- Lift the battery out of its recess and move it slightly away from the motherboard in order to reveal the battery cable.

Step 10 — Disconnect the battery

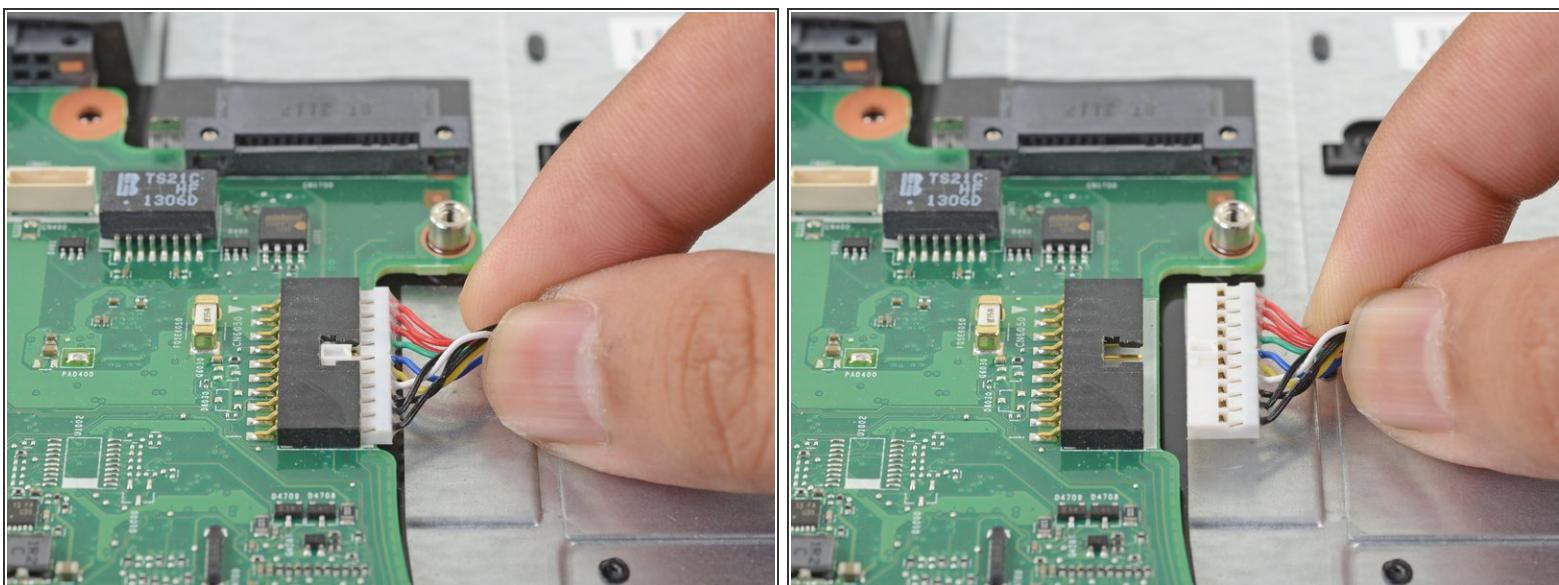

- Grasp the battery cable near its motherboard socket and pull the connector horizontally out of the socket.

Step 11 — Remove the battery



- Remove the battery.

To reassemble your device, follow these instructions in reverse order.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

For optimal performance, calibrate your newly installed battery: Charge it to 100% and keep charging it for at least 2 more hours. Then use your device until it shuts off due to low battery. Finally, charge it uninterrupted to 100%.