



Toshiba Satellite P205D-S8804 Screen Replacement

With this guide the screen on the Toshiba Satellite will be able to be removed and replaced.

Written By: Caroline Camp



INTRODUCTION

This guide will show how to remove the screen on the Toshiba Satellite.

TOOLS:

- Metal Spudger (1)
- Phillips #0 Screwdriver (1)

Step 1 — Screen



- With the screen on a flat surface, remove the screws in each corner of the screen. There will be 4 in total.
- Note: The screws for the screen may be hidden under rubber pad at the top of the screen so they will have to be removed.*


Step 2



- Using a metal spudger wedge open the front and back cover of the screen.

Take care to not damage the camera in the process.

Step 3

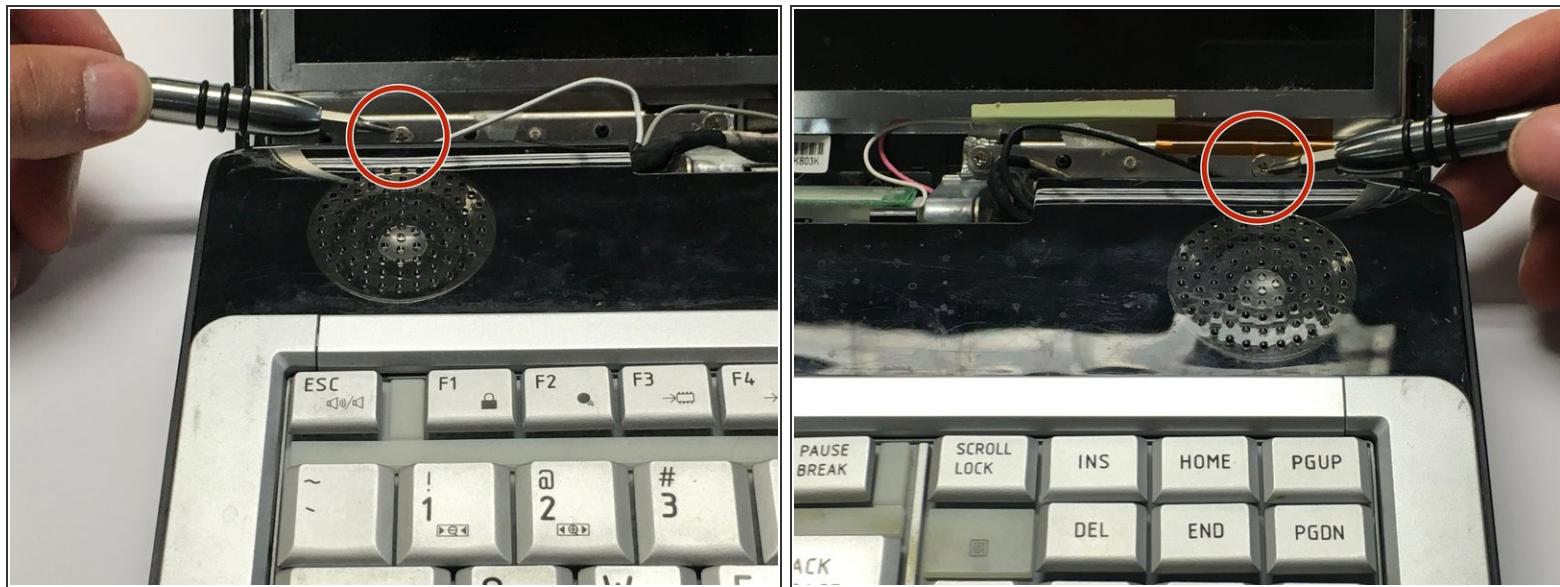

- After the front cover is removed remove the two screws at the very bottom of the screen.
(i) This will give you access to the screws running along the side of the screen.

Step 4




- Remove the four screws on the each side of the screen. There will be eight in total.
(i) We recommend starting from the bottom and working upward.

Step 5



- Lay the screen flat on the keyboard so they the back panel can be accessed.
- Remove all the tape on the video cable that connects the screen to the computer.

Step 6

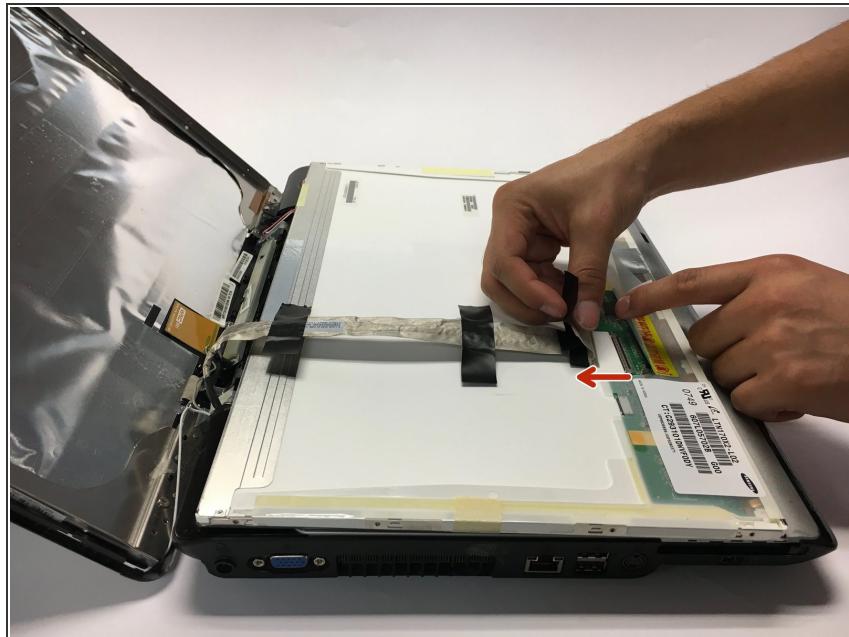

- Remove the video cable from the screen.
- After the video cable is removed the screen is free and can be removed from the computer.

To reassemble your device, follow these instructions in reverse order.