




Toshiba Satellite U840W Speakers Replacement

Use this guide to replace the speakers in your Toshiba Satellite U840W.

Written By: Thomas Marlett

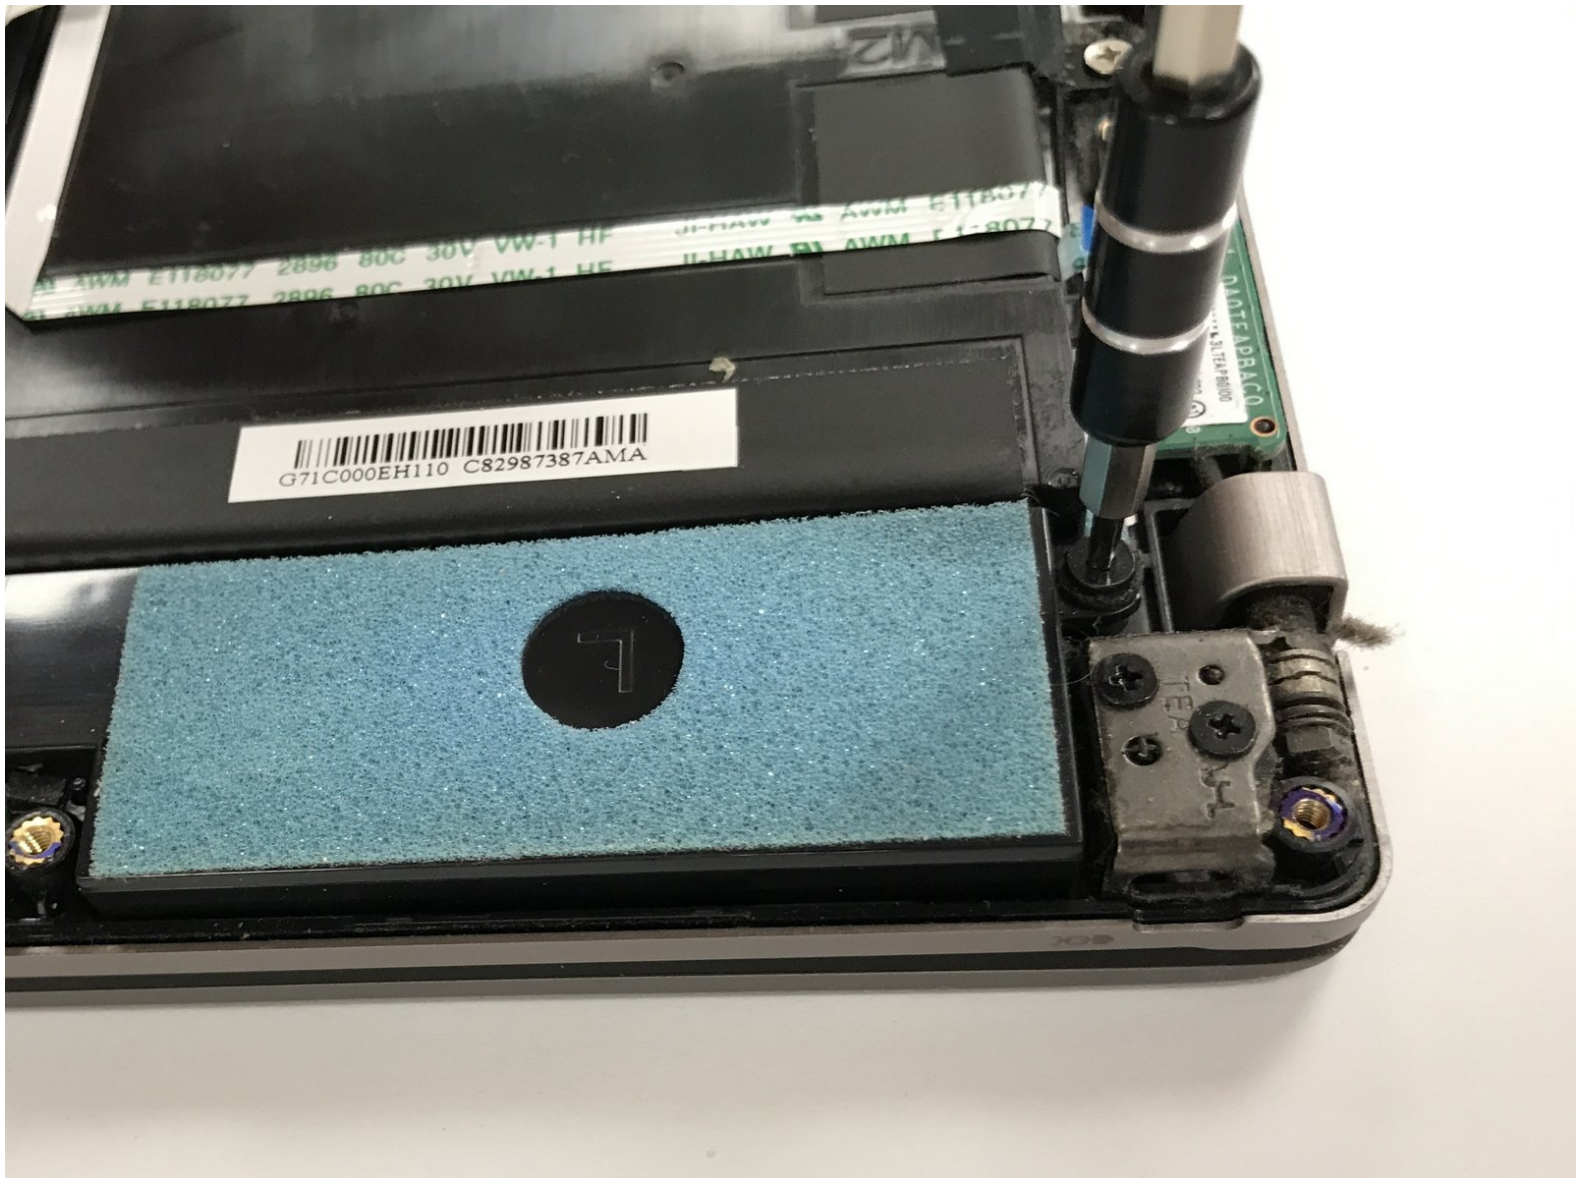

INTRODUCTION

With this guide you will be able to remove both left and right speakers and replace them.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Toshiba Satellite U840W Disassembly Guide




- There are ten 5mm screws surrounding the edge of the cover.
- A rubber cap covers the eleventh 5mm screw (in the center).
- Remove the screws using a Phillips #00 screwdriver.

Step 2




- Pry between the casing and cover using a plastic wedge tool.
- Use the wedge tool to move along the case & slowly pry it open.
- The wire for the 12v charging port connects the cover to the casing.

Step 3

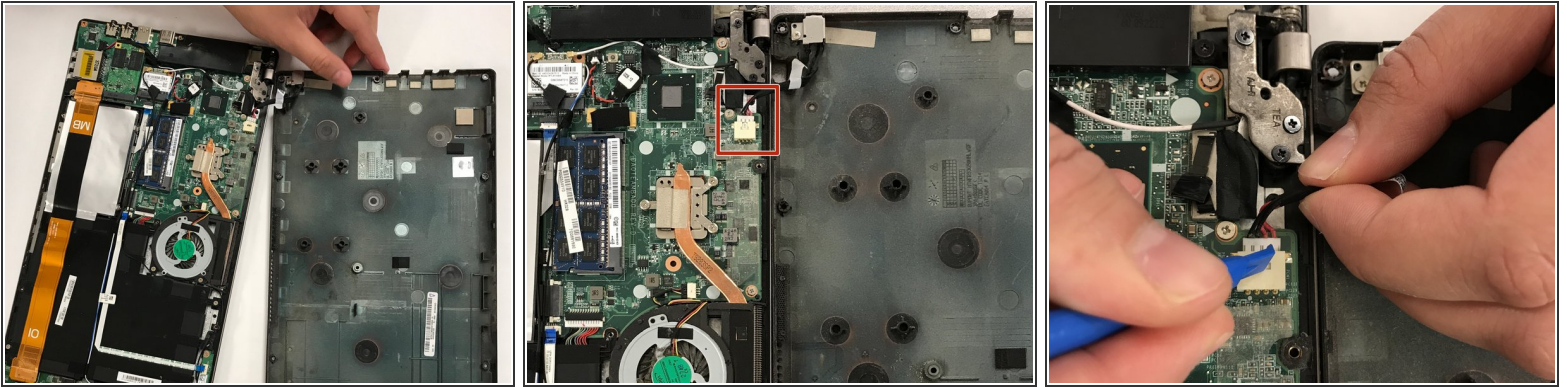


- Disconnect this connector from the motherboard to avoid damaging the motherboard or charging port cable.

Step 4

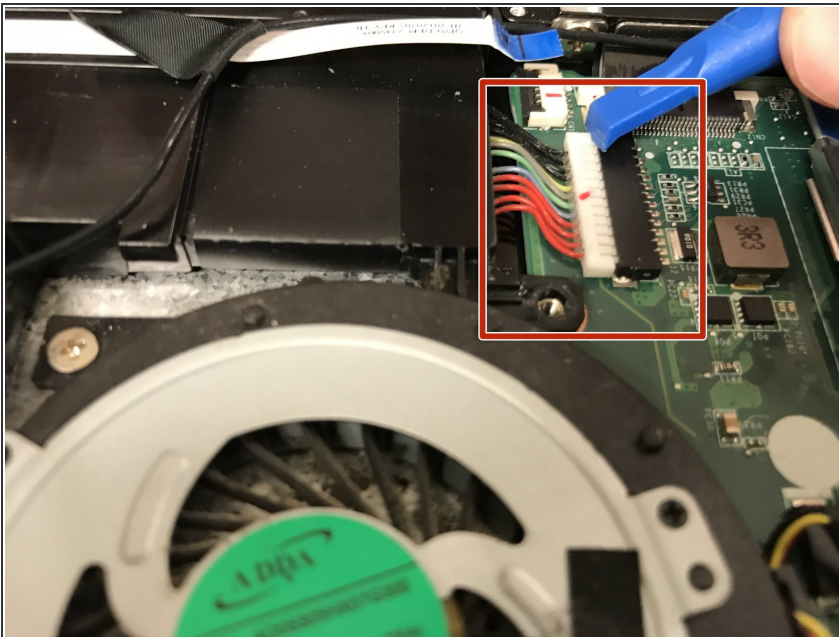



- Disconnect the battery.
- Hold down the power button for ~10 seconds to discharge any stored electricity from the motherboard.

Step 5

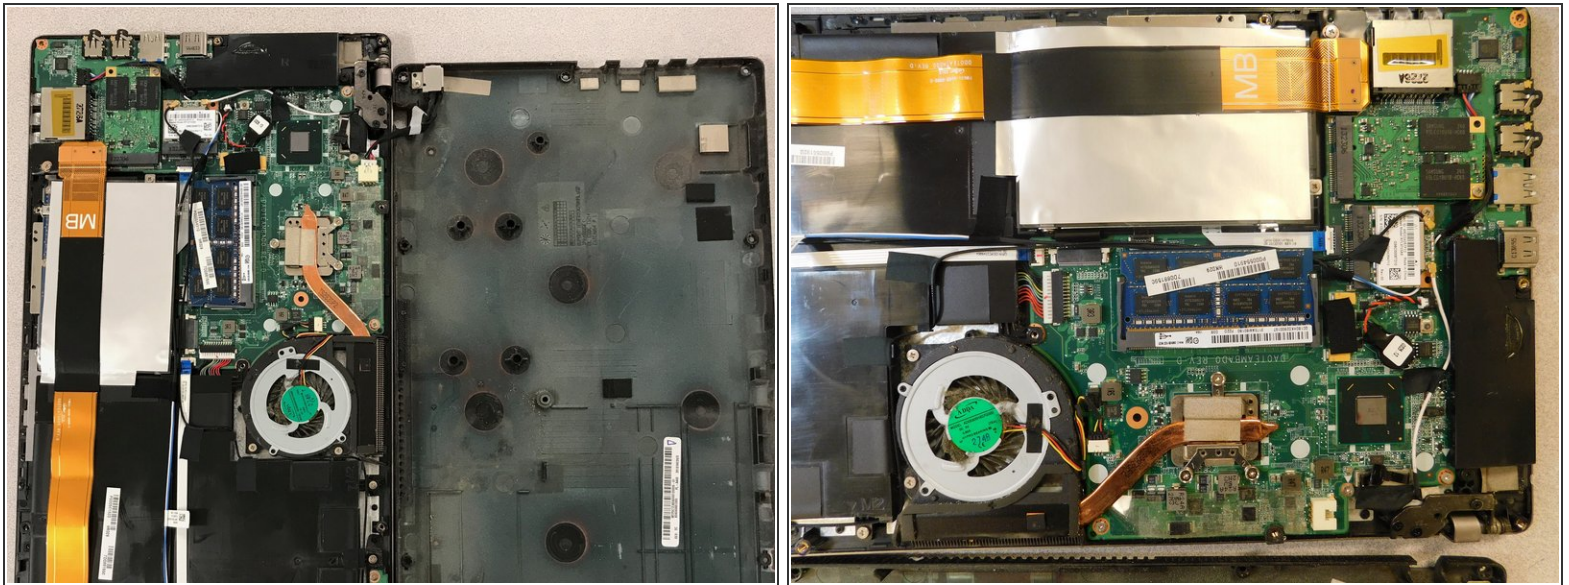



- At this point you should be able to:
- [Replace 12V Charging Port](#)
- [Replace RAM](#)
- [Replace Processor Fan](#)
- [Replace Speakers](#)

Step 6 — Speakers

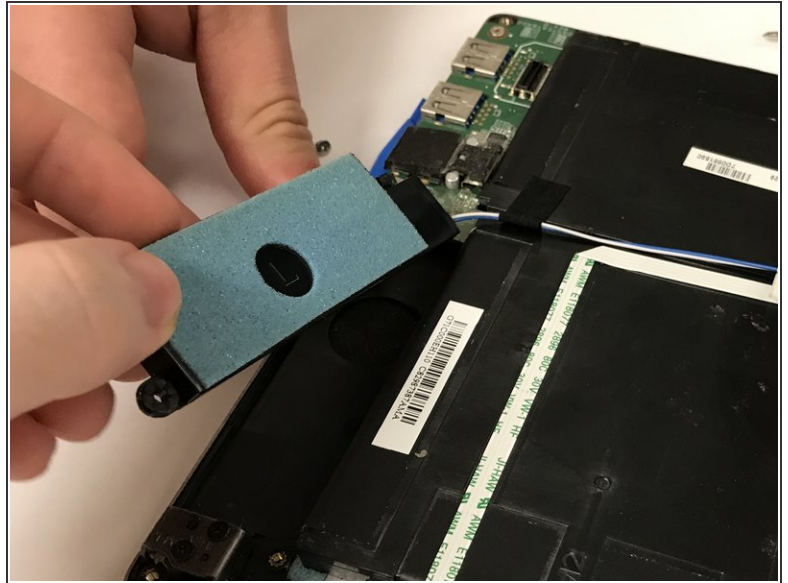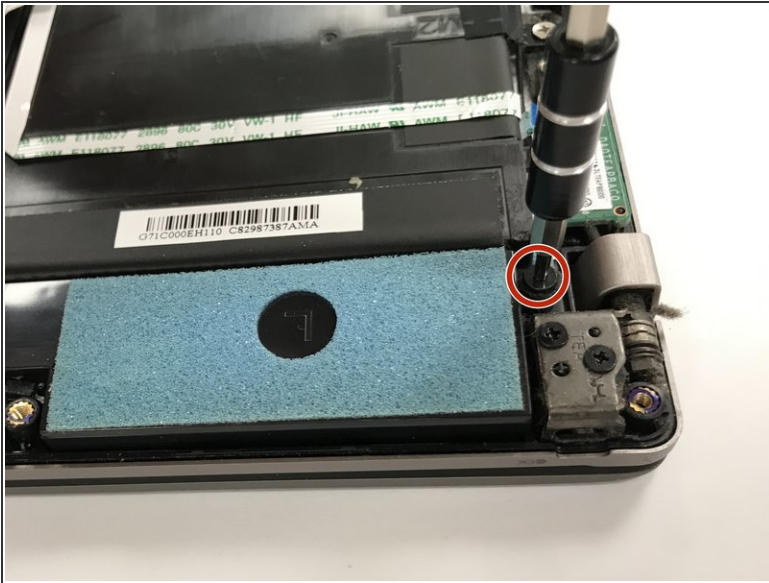


- Remove the two 5mm screws using a Phillips #00 screwdriver.
- Remove the left speaker.

Step 7

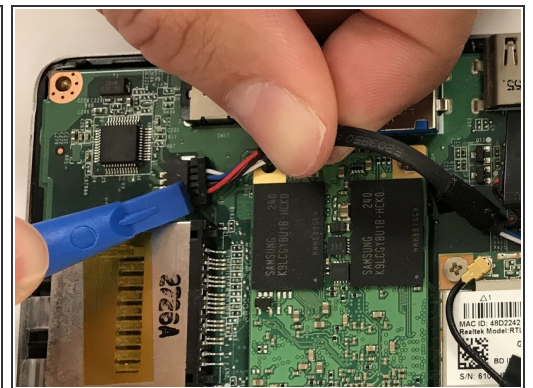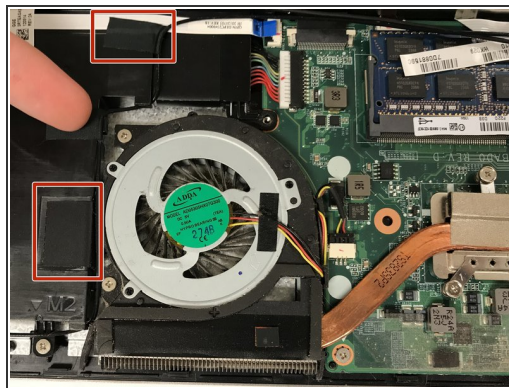

- Remove tape holding the speaker wire.
- Follow length of wire to the connector while removing the tape.
- Remove connector.

Step 8

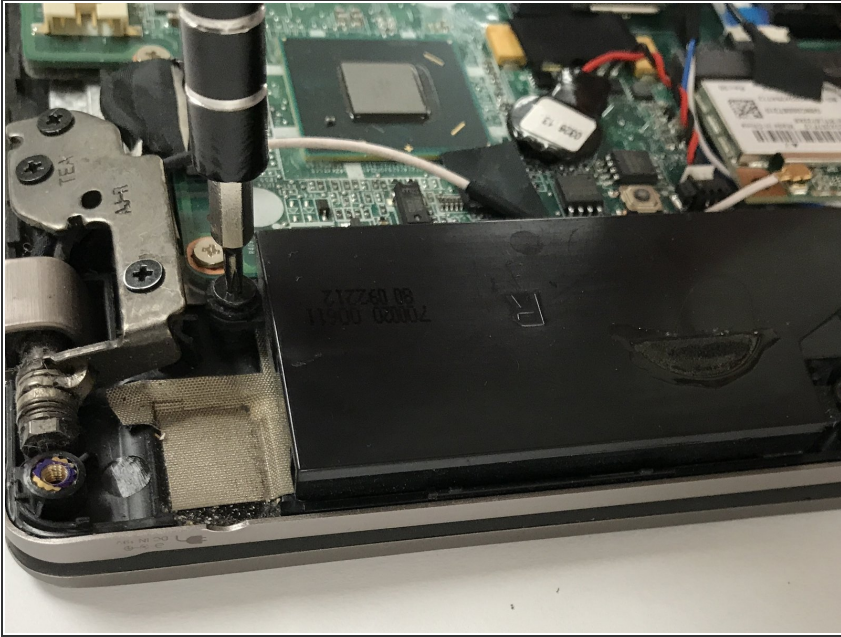

- Follow steps "6" and "7" to remove the right speaker.

To reassemble your device, follow these instructions in reverse order.