



# Trio AXS 3G Battery Replacement

If your tablet's battery no longer holds a charge, this guided will show you how to replace it with a new one.

Written By: Michaela Causey



## INTRODUCTION

If your tablet's battery no longer holds a charge, this guided will show you how to replace it with a new one.

### TOOLS:


- [iFixit Opening Tools](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [Soldering Iron](#) (1)
- [Plastic Cards](#) (1)

## Step 1 — Back Case



- ⓘ On the back of the device there is a white SD card case that shelters the screws that attach the back panel to the tablet.
- Use your thumbs to slide up and off the small SD card case.

## Step 2

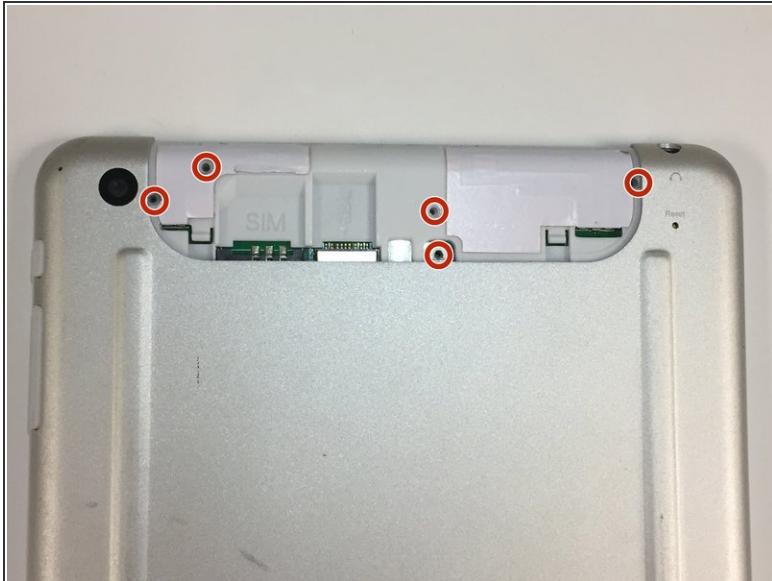

- Using the Phillips Head #000, unscrew the 5 4mm and 3mm screws at the top.

## Step 3



- Insert a plastic opening tool between the back panel and the front of the tablet, and gently pry it away from the tablet.

 Do not pry too hard as the screen is fragile and might crack.


-  It is best to start at the bottom of the tablet when prying the back panel off.
-  The volume piece will also dislodge when the back panel is removed.

## Step 4 — Battery



-  The battery is the large, silver square inside the tablet. It is connected to the motherboard by two wires.

## Step 5

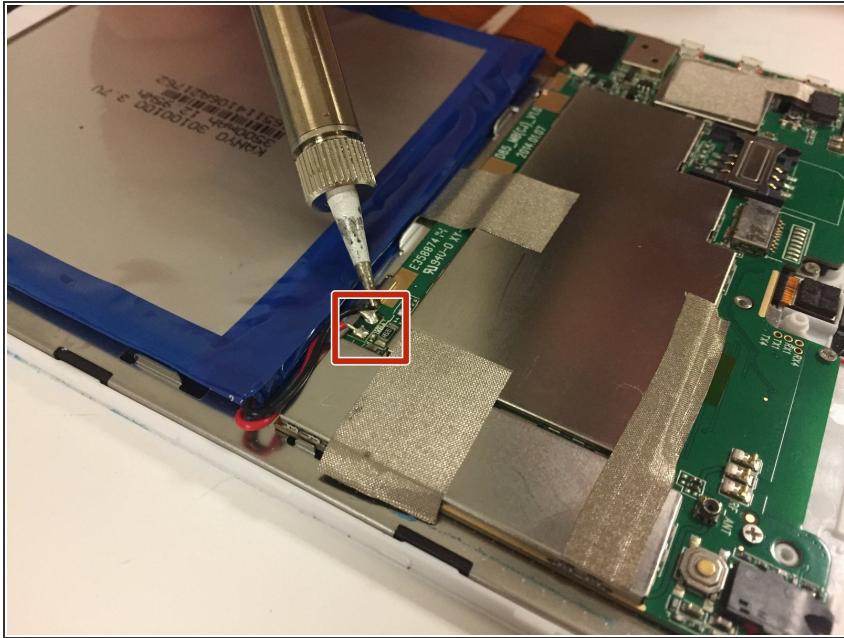

- Use the soldering iron to remove the two metal ends that connect the battery to the motherboard.

## Step 6



- Use the plastic card to pry the battery away from the device.

*(i)* The battery is attached to the tablet by glue.

## Step 7



- Peel off the battery from the device to completely remove it.

To reassemble your device, follow these instructions in reverse order.