



Trio STEALTH-9 Camera Replacement

In this guide, you will be taking apart your Trio device to gain access to the Camera.

Written By: Joshua Chavis




INTRODUCTION

This guide should not be too difficult, as there isn't really a need to use any soldering/desoldering tools to take apart anything. You will have to still be careful about some of the cables within the device though.

TOOLS:


- [iFixit Opening Picks set of 6](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Back Cover

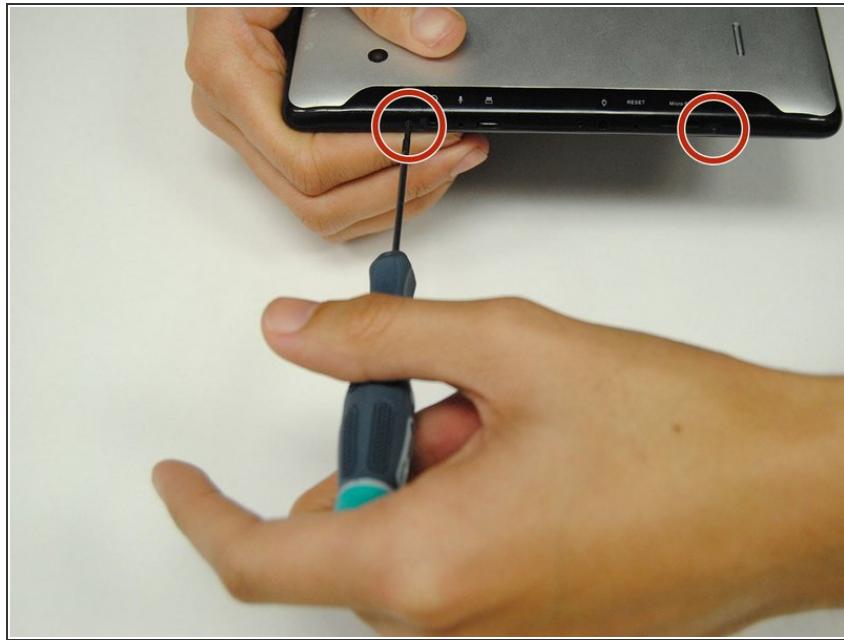

- Remove the two Phillips #00 screws on the side of the tablet.

Step 2

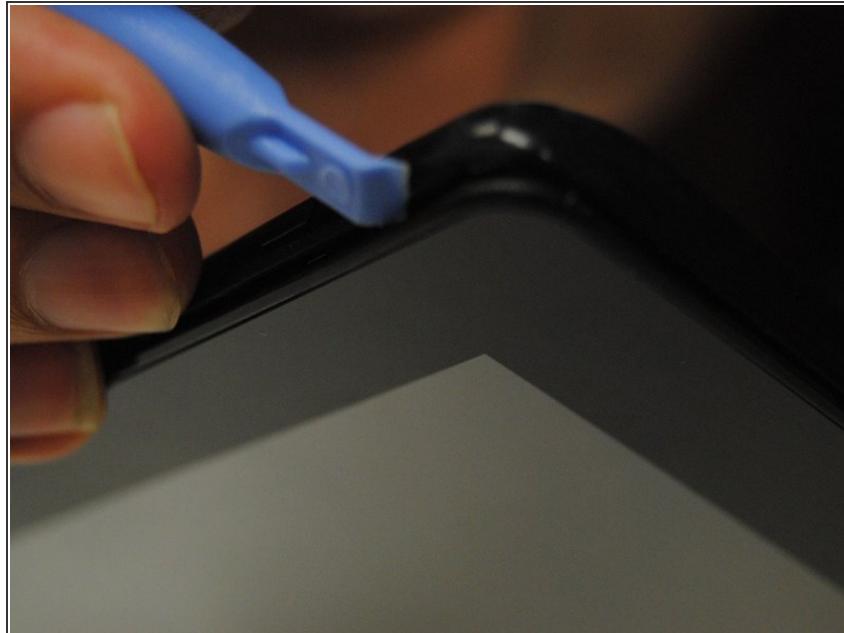

- Take one of the plastic opening tools and wedge it in the middle of the tablet, starting on the USB Port side.
- Holding the tool in place, take one of the 6 plastic opening picks and slide it across the opening you made with the opening tool.

Step 3





- Continue going around the tablet sides with the plastic pick, being sure that you are maintaining the openings you made with either your hand or the opening tool.
- **i** You will notice some popping as you go around with the pick. Don't worry, this is completely normal.

Step 4





- Remove the back cover of the tablet to reveal the internals.
- **★** To replace, pinch each of the ends together until all four sides are closed.

Step 5 — Camera

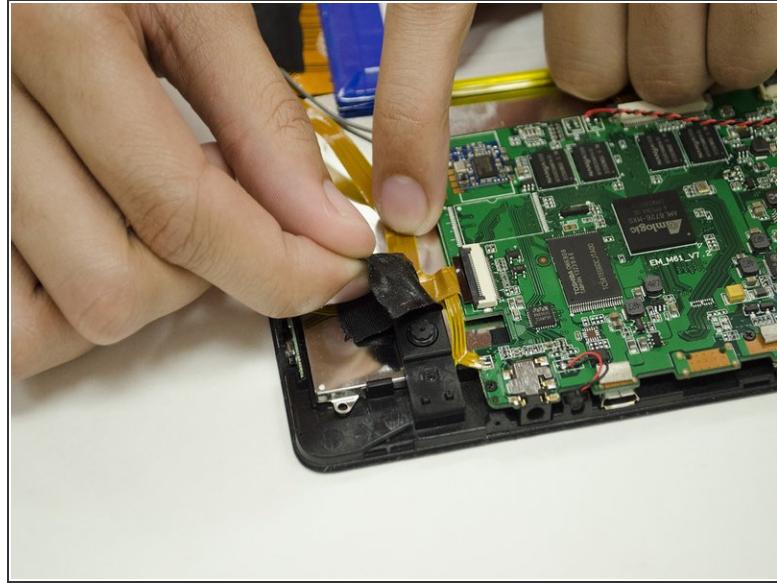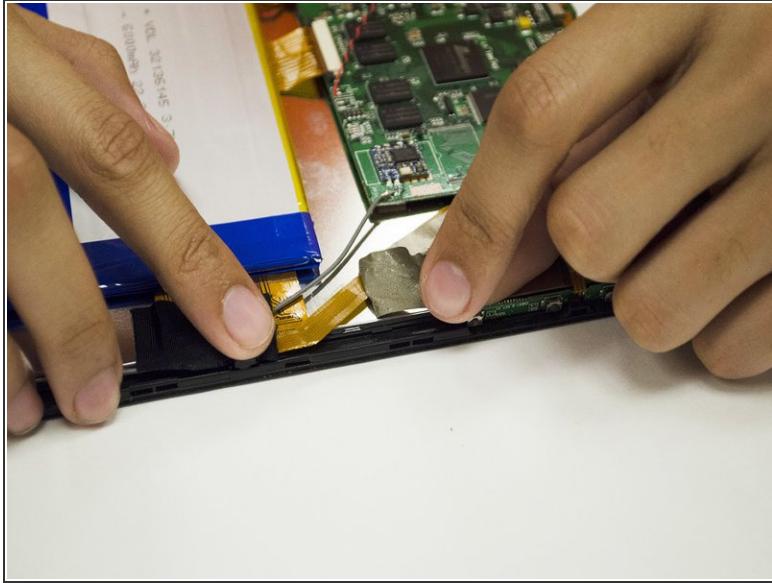



- Slowly remove the two pieces of electrical tape holding down the Camera ribbon cable.

Step 6

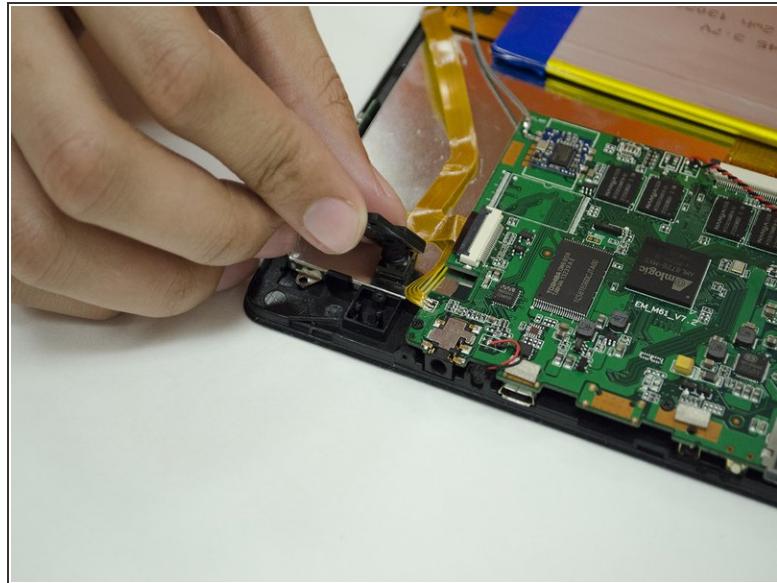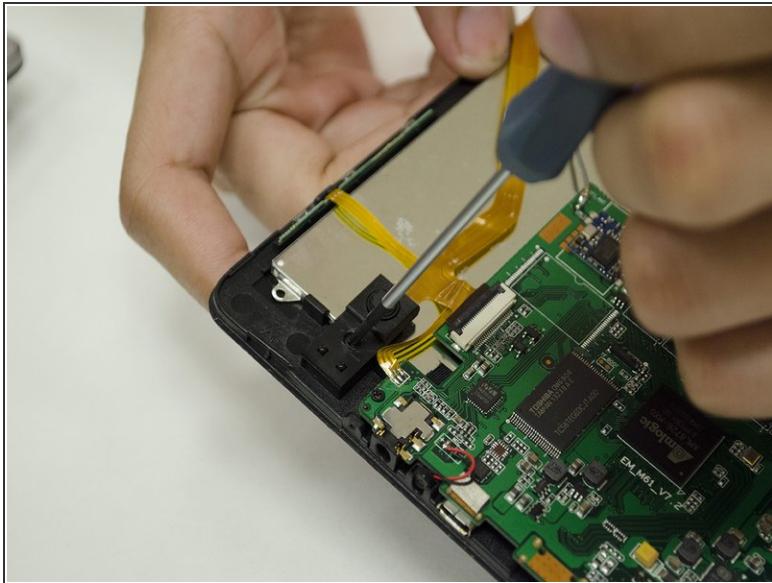

- Remove the #00 Screw holding down the Camera mount, then remove the Camera mount.

Step 7

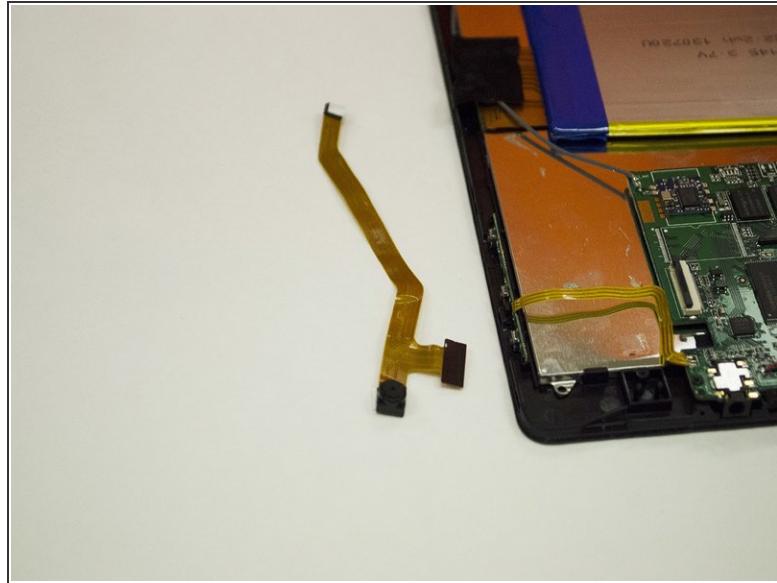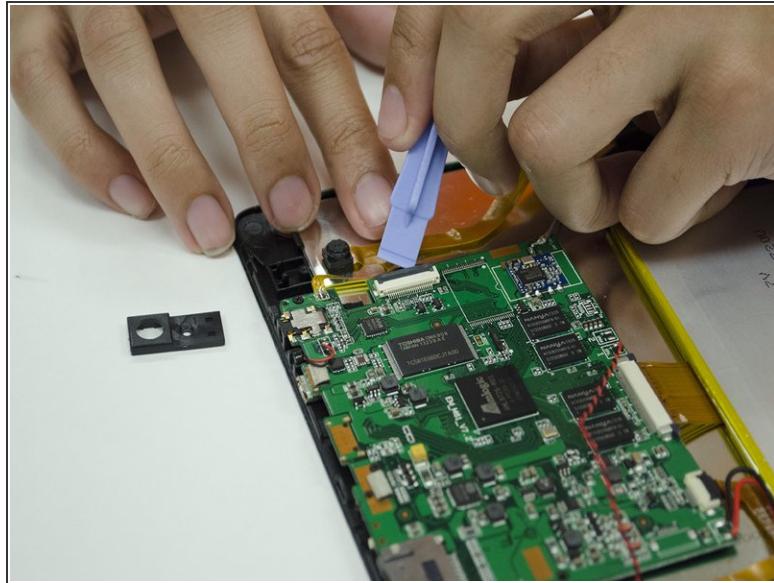

- Detach the Camera's ribbon cable from the Motherboard using your fingernail or a plastic opening tool.
- Remove the camera from the frame and replace as needed.

To reassemble your device, follow these instructions in reverse order.