



Trio Stealth Pro 9.7" Battery Replacement

A step by step guide on how to replace a Trio Stealth Pro 9.7" battery.

Written By: Edward Insogna



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Battery




- Remove 2 black 4 cm Phillips screws on either side of the bottom of the device.

Step 2

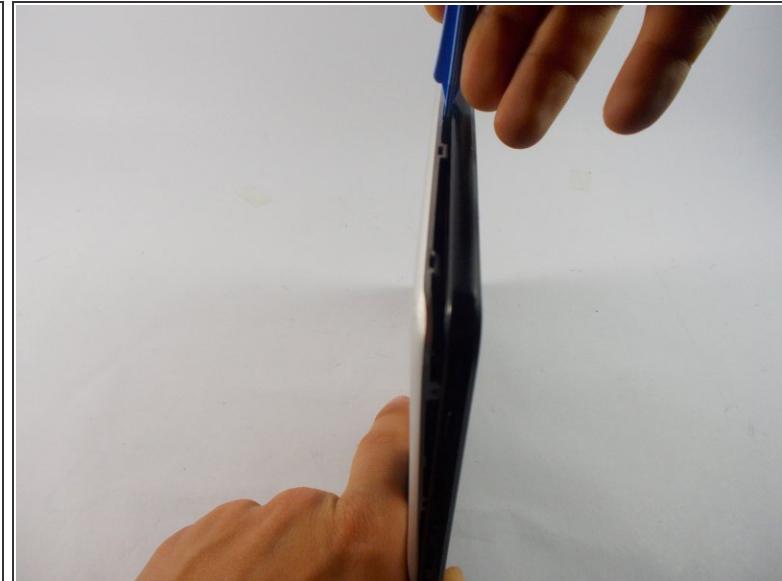


- Use the plastic opening tools and the spudger around the outside of silver metal back plate on the device to pry off the back plate.

Step 3

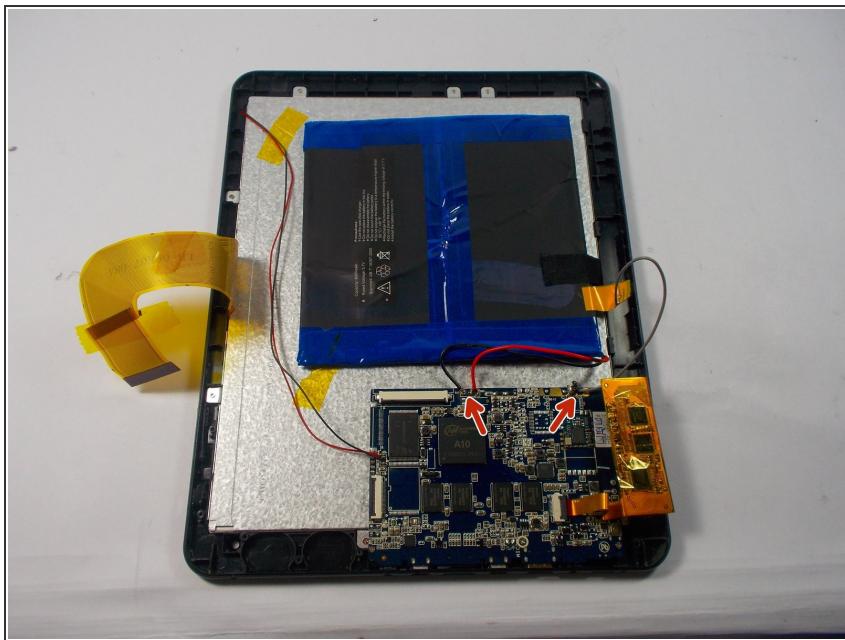

- Cut red, black, and gray wires connecting the battery to the motherboard.

Step 4

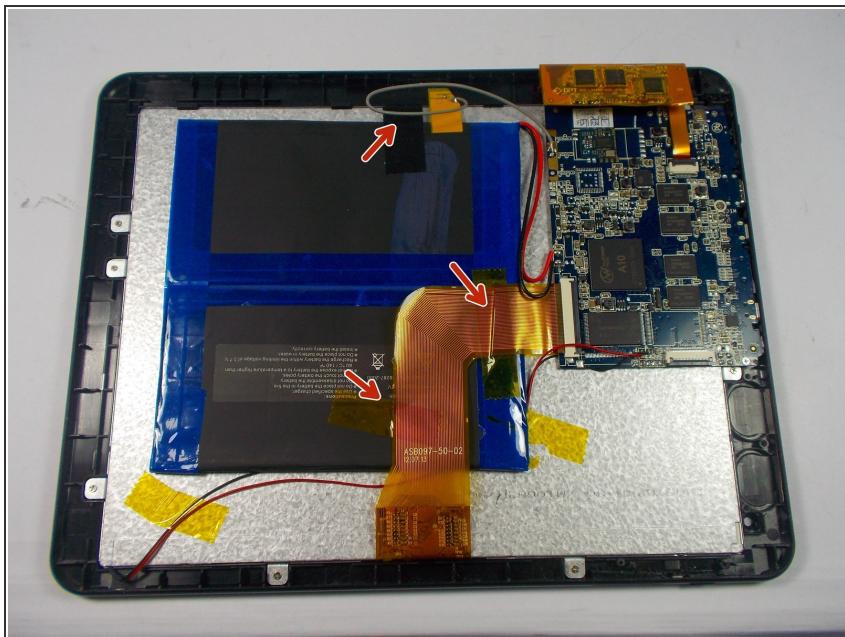

- Remove tape on top of battery.

Step 5



- Use the plastic opening tool and the spudger to pry up and remove the battery.

To reassemble your device, follow these instructions in reverse order.