




Trio Stealth-10 Battery Replacement

This guide will detail the steps to replace the battery on the Trio Stealth 10.

Written By: Daniel Coleman

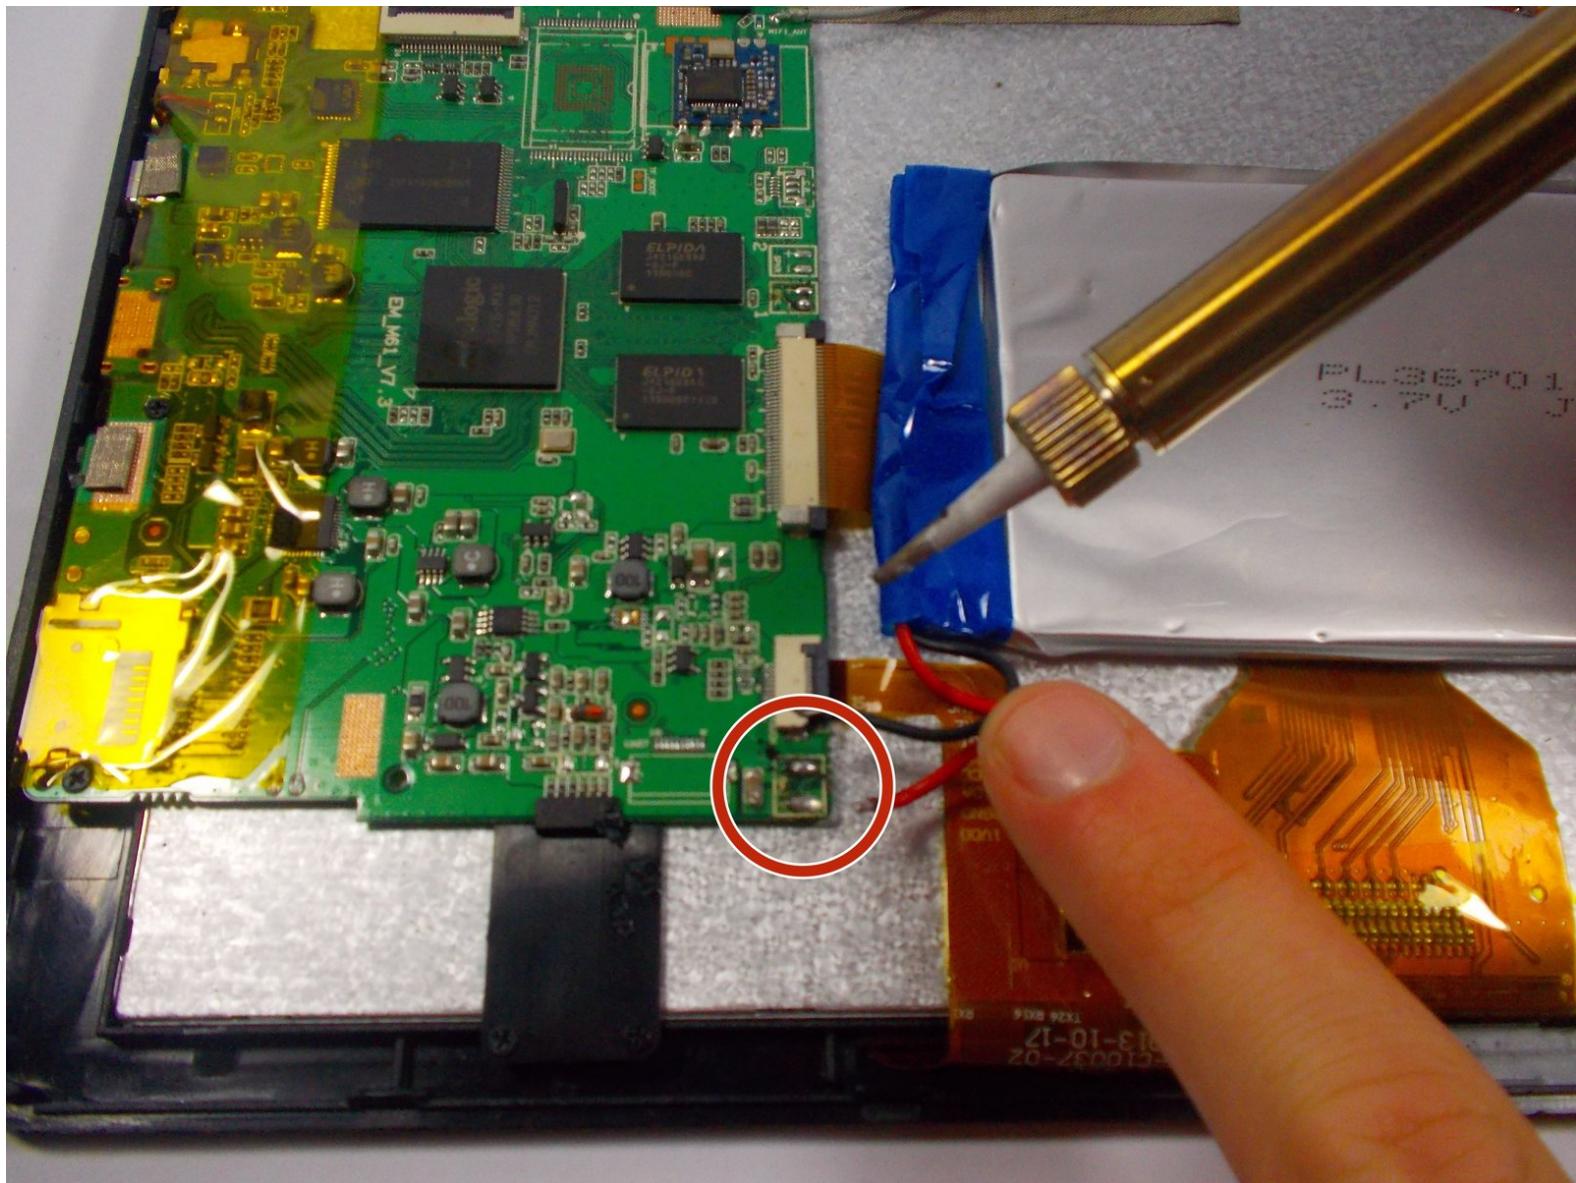

INTRODUCTION

If the battery on your Trio Stealth-10 is no longer functioning, replacement isn't difficult and this guide will give you the step by step procedure to do so.

TOOLS:


- [iFixit Opening Tools](#) (1)
- [Soldering Iron](#) (1)

Step 1 — Back Panel



- To remove the back panel, you will need to use a plastic opening tool and slowly separate the back panel from the device.

Step 2 — Battery

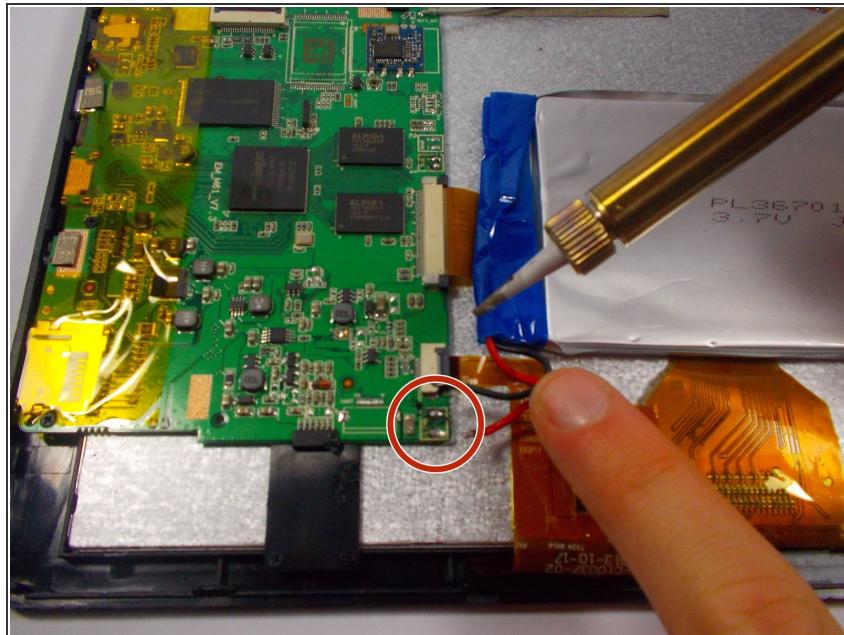


 This step will require soldering. If you are unfamiliar with soldering then we recommend that you get

help from another person or use the [soldering guide](#) made by iFixit to help.

- Solder the connections off for the battery.

Step 3

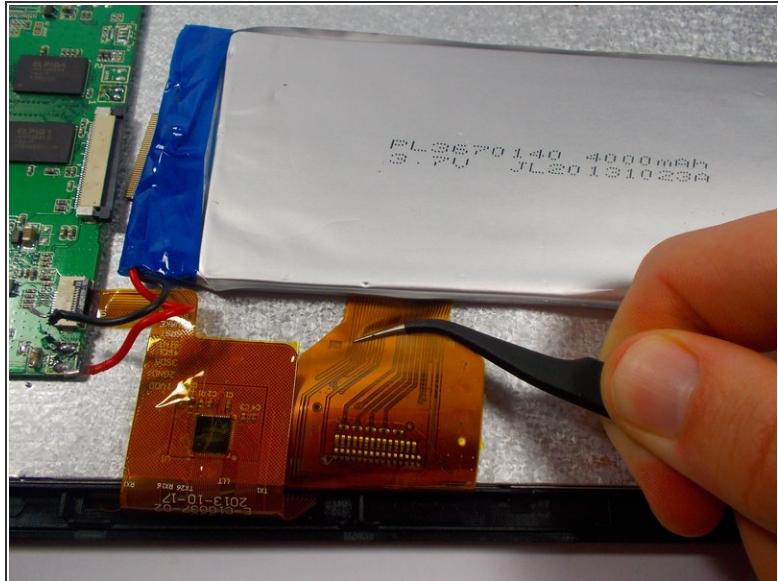

- Disconnect the screen/digitizer connection. Use tweezers and pull each grey end of the connection until there is a small gap between the grey and white on the connector to the motherboard. The connection should be easily removable.
- Pull the cable away and clear from under the battery to avoid damage to the connection.

Step 4



- Pry battery up from adhesive. Use a type of adhesive remover. Nail polish remover works well.

To reassemble your device, follow these instructions in reverse order.