



Turtle Beach Ear Force XO One Speaker Replacement

This guide shows how to remove and the speaker and the step you need to take to replace the part.

Written By: Stephen Reilly



This document was generated on 2019-10-02 08:13:38 AM (MST).

INTRODUCTION

If you're experiencing poor sound quality, you might need or want to replace your speaker. This guide shows the steps necessary to replace the speaker.

TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — Speaker




- Start with the ear padding facing up.

Step 2



- Remove the ear padding by separating the fabric piece from the plastic headphone piece.
- The leather padding will slide off the plastic piece holding it in place. Don't be afraid to pull with a little force.

Step 3

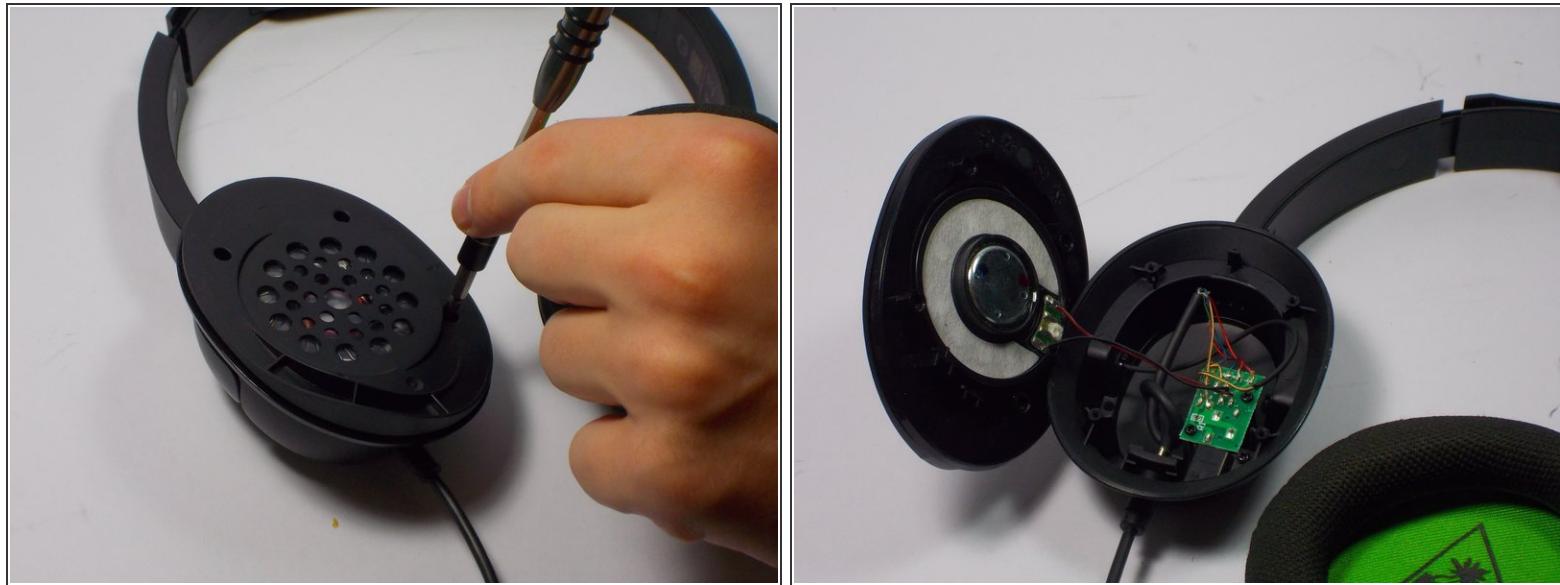

- Use a Philips head screwdriver to remove the speaker cover.
- Be careful the speaker is attached to the chip inside by wires.
- The recommended screwdriver bit size is a PH 0.

Step 4



- Once the speaker cover is removed, the wires can be cut or de-soldered.
- Remove the speaker.
- Insert the new speaker

To reassemble your device, follow these instructions in reverse order.