



Uniden Guardian G955 Battery Replacement

This guide shows how to replace the battery of the Uniden Guardian G955.

Written By: Sundus Al Shibani




INTRODUCTION

The battery of your device may need to be replaced if it drains quickly or does not charge.

TOOLS:

- [J1 Screwdriver Bit \(1\)](#)
- [Heavy-Duty Spudger \(1\)](#)

Step 1 — Battery

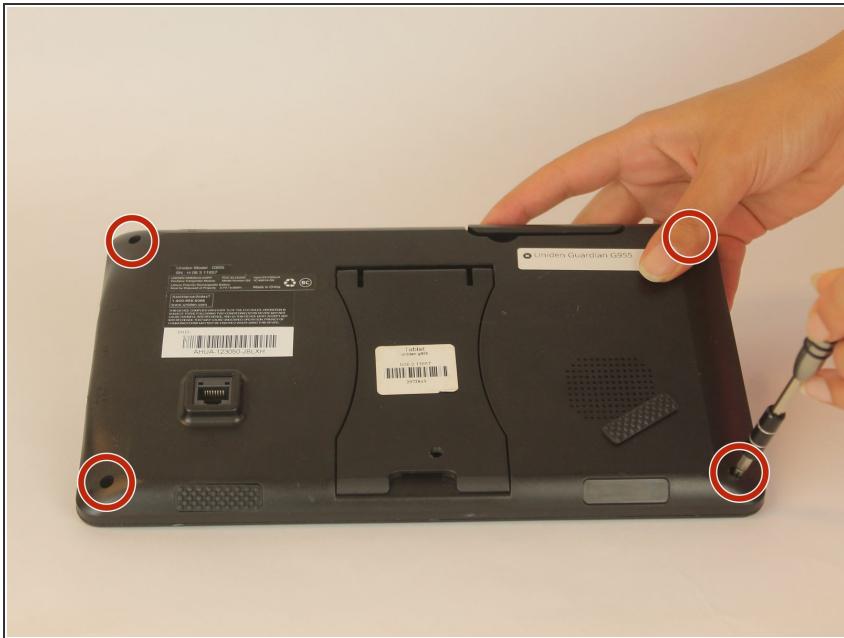



- First, remove four 6.1 mm screws from your monitor using a J1 Phillips head screwdriver.

Step 2





- Carefully, use a metal spudger to open the case starting from any corner.
- Slowly slide the spudger along the inside edge of the case.

Step 3

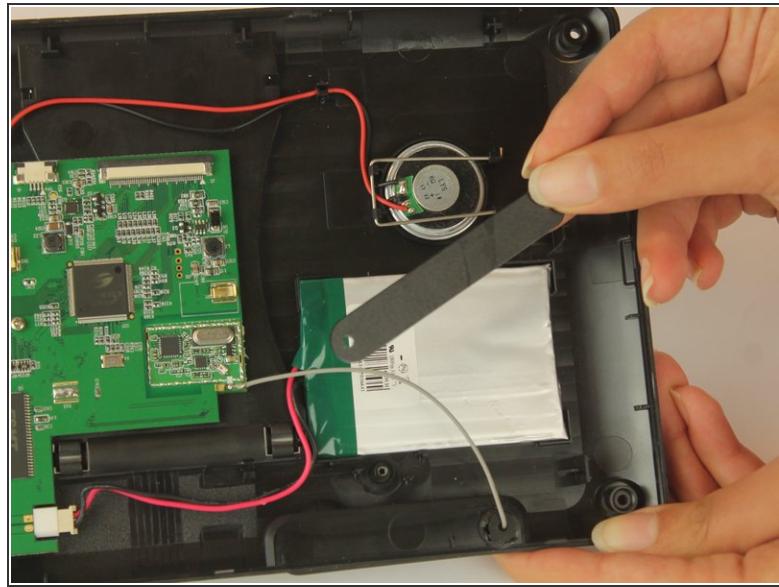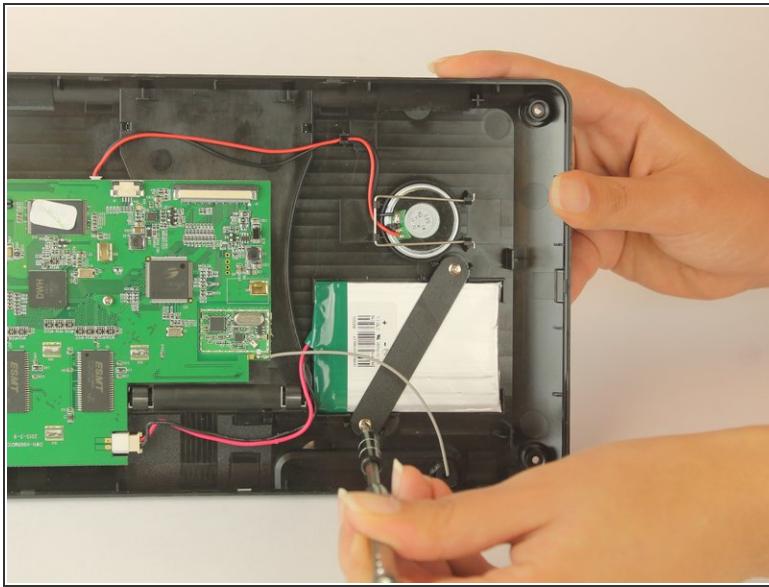


- Remove the two 6.1 mm screws from the black fastener using a screwdriver.
- Remove the black fastener.

Step 4

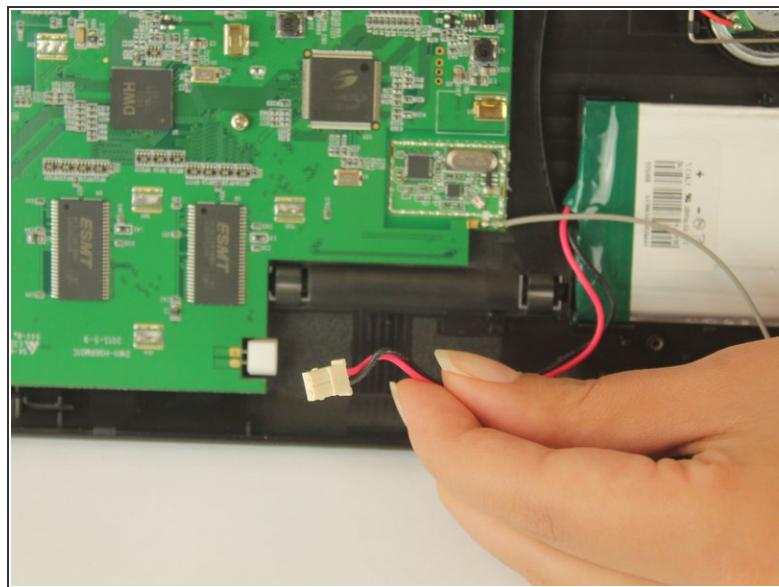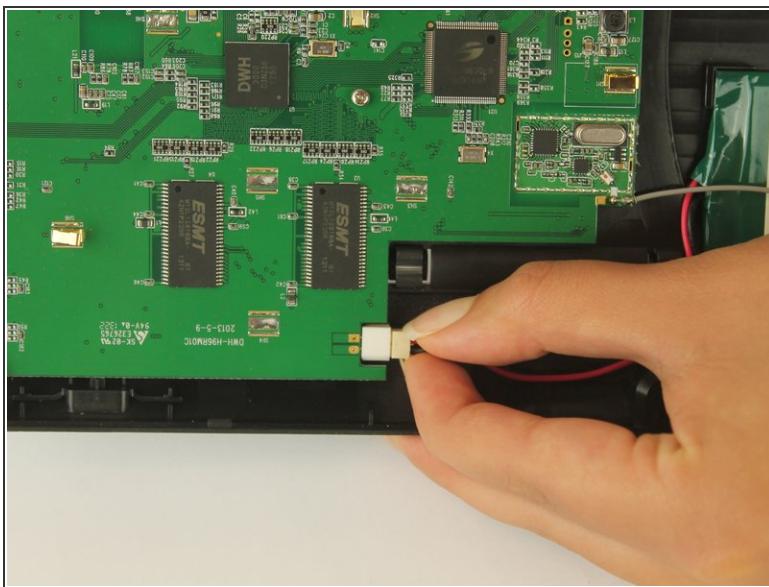

- Disconnect the head of the cable attached to the motherboard by pressing on the outer edge of the cable and sliding it out.

Step 5

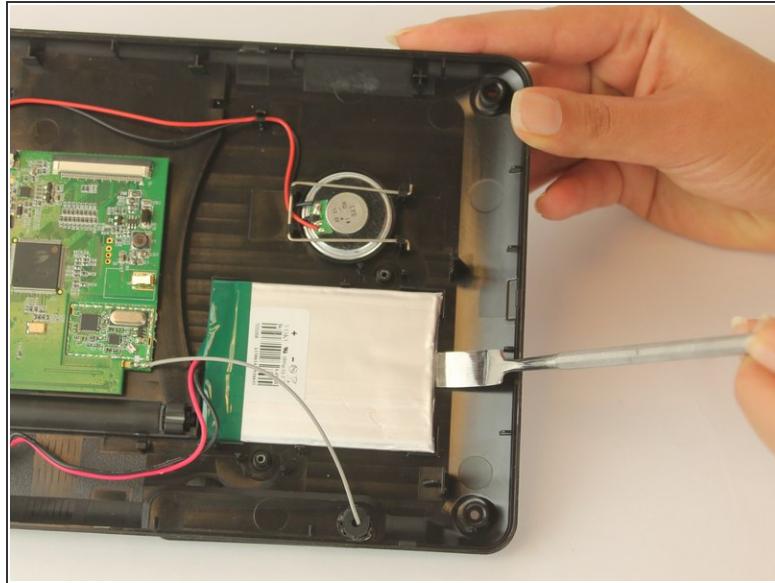

 This step shows the use of incorrect tools. Always use ESD safe tools when handling delicate internal components.

- Remove the battery from the case by sliding a nylon spudger below it.

To reassemble your device, follow these instructions in reverse order.