




Uniden Guardian G955 Touchscreen Replacement

Will successfully teach user how to replace touchscreen.

Written By: Pauline Lara

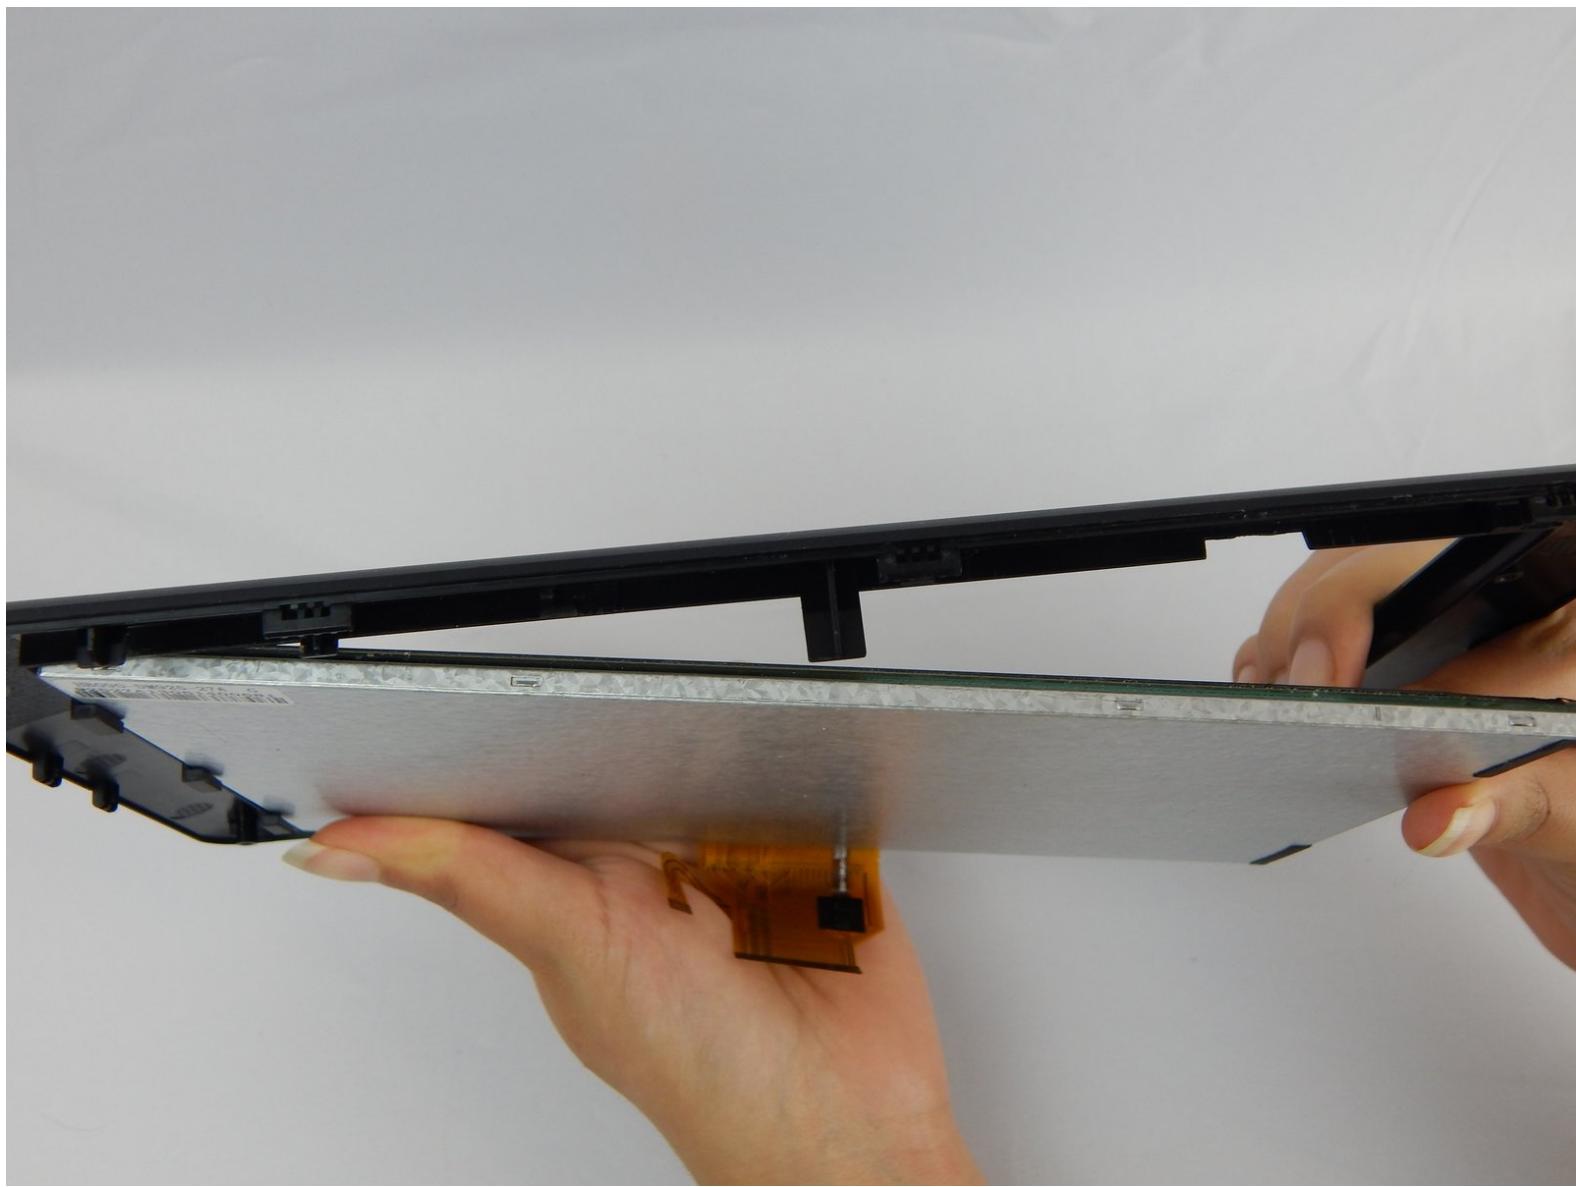

INTRODUCTION

Separate the case in order to remove casing holding the touchscreen in place. Replace the touchscreen.

TOOLS:

- J1 Screwdriver Bit (1)
- Metal Spudger (1)

Step 1 — Touchscreen




- Use a J1 Phillips screwdriver to remove the four 6.1 mm screws at the back of the monitor.

Step 2




- Use metal spudger or an opening tool to pry open the device.

Step 3

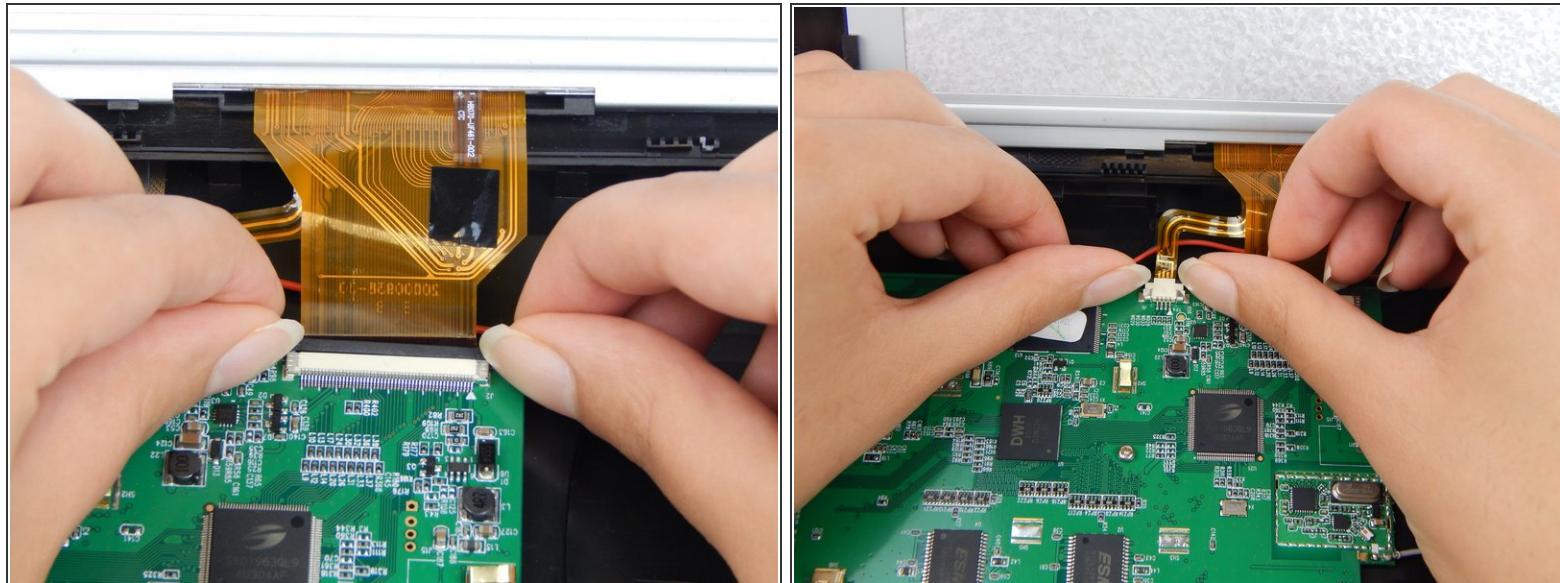



- In both pictures, disconnect the zero insertion force (ZIF) connector from the motherboard using your fingernail by sliding up on the male end of the connector to loosen it.

Step 4

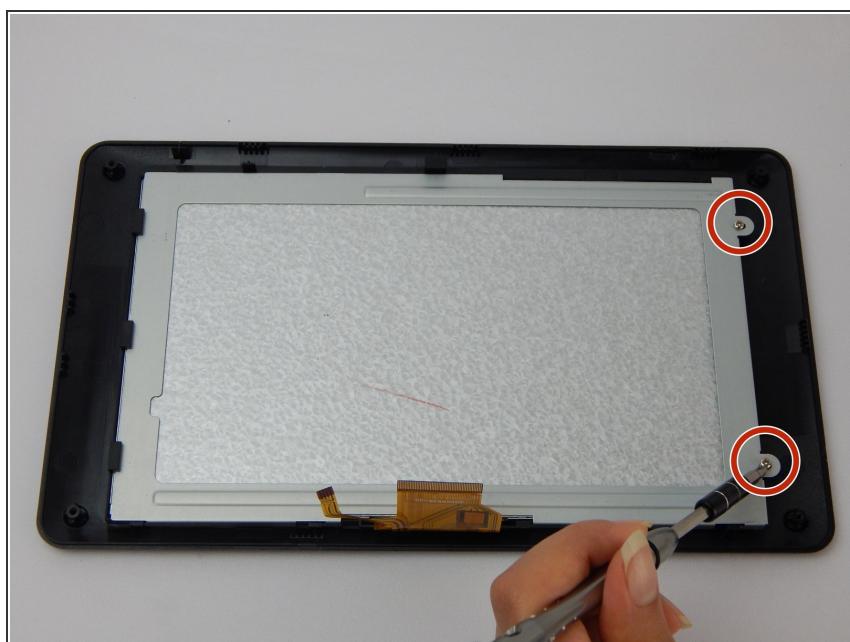



- Use a J1 Phillips screwdriver to remove the two 6.1 mm screws.

Step 5

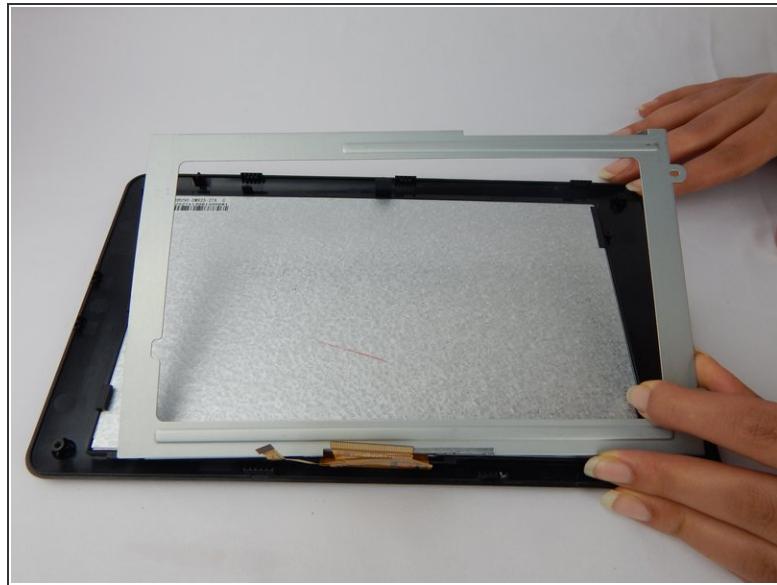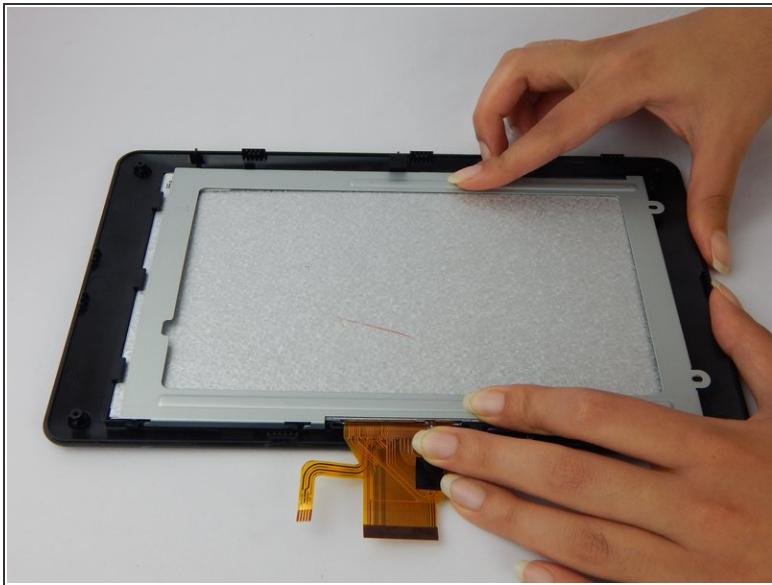

- Apply pressure to metal casing and slide off.

Step 6

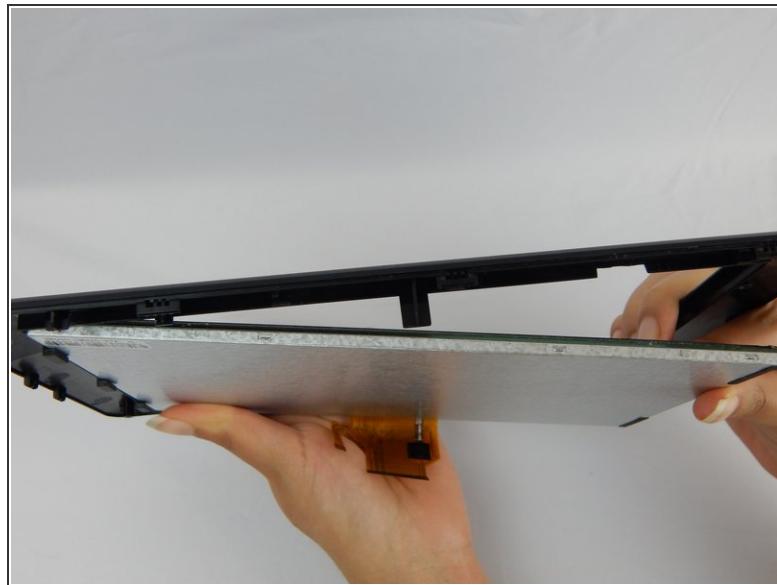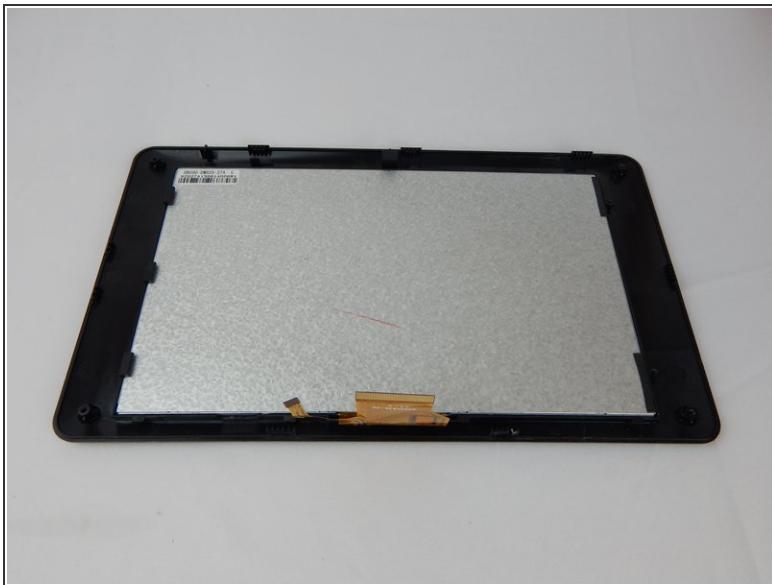

- Push touchscreen through black case.

To reassemble your device, follow these instructions in reverse order.