



VENSTAR Taco Disassembly

This guide describes the necessary steps to open up the Taco. Disassembling the Taco is essential to make any significant repairs. There are no notable hazards. You will need a Phillips PH0 screwdriver, a plastic opening tool, and precision tweezers.

Written By: Michael Thompson



INTRODUCTION

There is no visible way to open this device. Knowing this, assembly and disassembly must be done carefully in order to maintain the integrity of the device.

TOOLS:

- [iFixit Opening Tools \(1\)](#)
- [64 Bit Driver Kit \(1\)](#)

Step 1 — VENSTAR Taco Disassembly



- Starting with the Taco on its side, use the plastic opening tool to pop off the outer casing near the base.


! The base labeled "VENSTAR TACO" is glued. Be careful separating the two sides of the device.

Step 2



- Repeat the previous step on the opposite side to remove the other outer casing.

Step 3

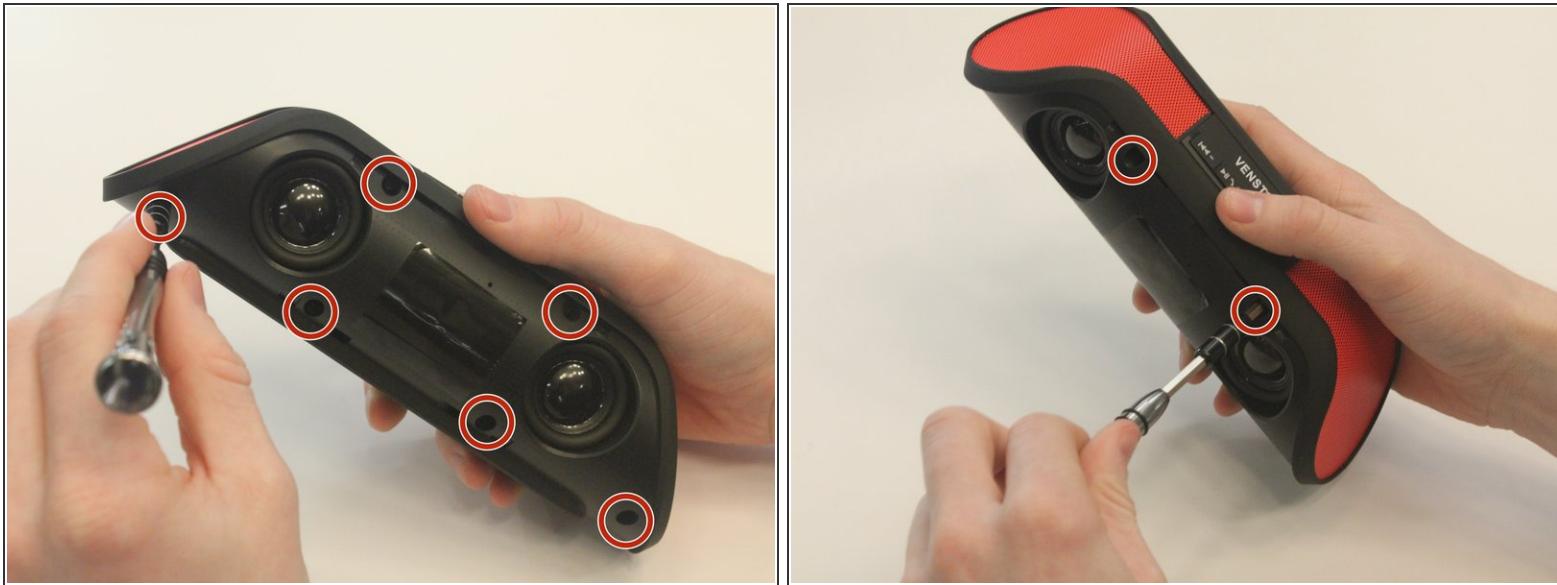

- Using a Phillips PH0 3 mm-bit screwdriver, remove the six screws on the inner layer of the Taco.
- ⚠ The screws are small and can get stuck. Use tweezers to pull them out if you are having trouble.

Step 4



- From the same side you just unscrewed, use a plastic opening tool to unwedge the inner cover on both sides of the base.

Step 5



- Slide off the inner cover. It pulls apart and is held on by a small amount of glue.

To reassemble your device, follow these instructions in reverse order.