



# VTech Baby's Learning Laptop Buttons Replacement

Replace the buttons and button contacts to restore device functionality.

Written By: Christopher Kourmoulakis



## INTRODUCTION

Does your device not respond when buttons are pressed? Do only a few buttons seem to function correctly? This guide will walk through the steps required to replace the buttons.

### TOOLS:

- [Phillips #2 Screwdriver](#) (1)
- [Phillips #0 Screwdriver](#) (1)

## Step 1 — Battery and Rear Panel




- To remove the battery door, loosen the screw shown using a Phillips #2 screwdriver.
- *i* A coin can also be used to loosen the screw.

## Step 2




- Remove the battery door.
- Take out the batteries.

## Step 3

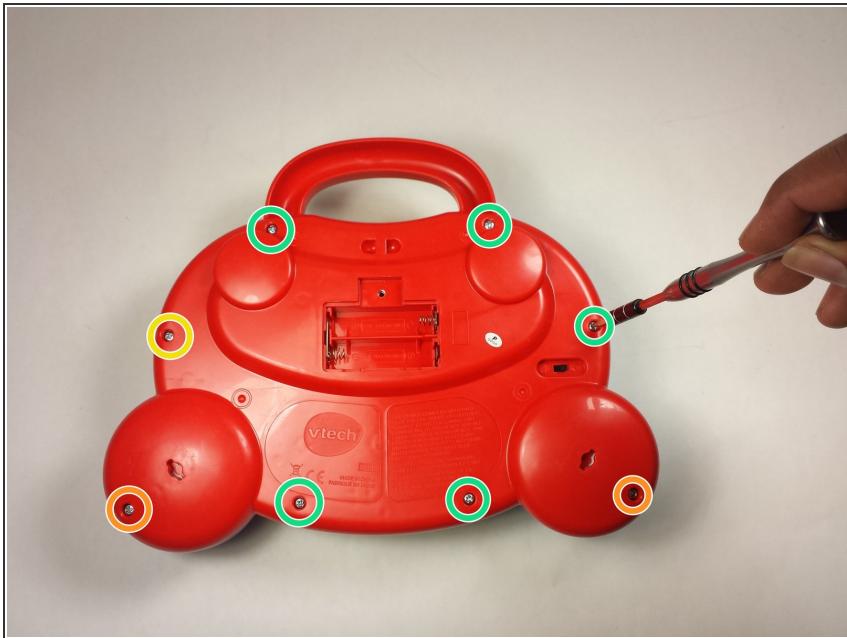

- Remove the rear panel screws using a Phillips #2 screwdriver.
  - Two 21.6mm (Long)
  - One 9.8mm (Short)
  - Five 13.8mm (Medium)

## Step 4

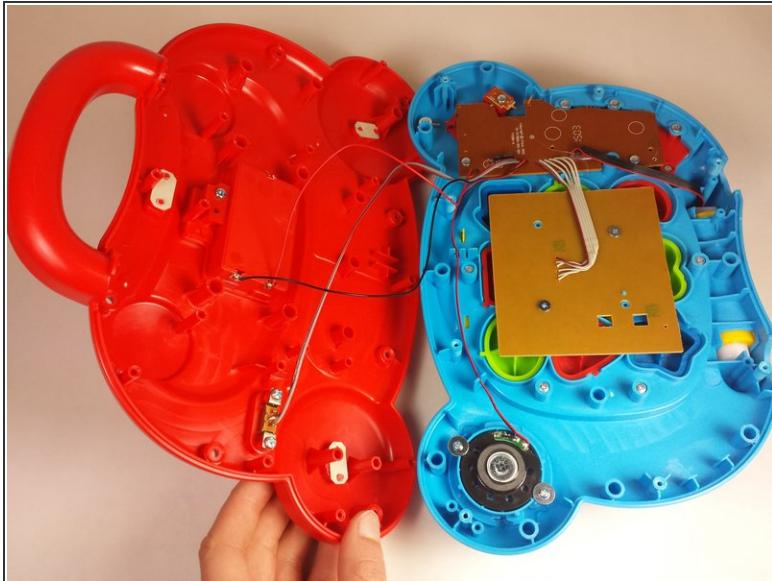


- Gently pull up on the rear panel.

**⚠** Be careful not to pull on the wire connections.


- Rest the laptop open on the table.

## Step 5 — Buttons

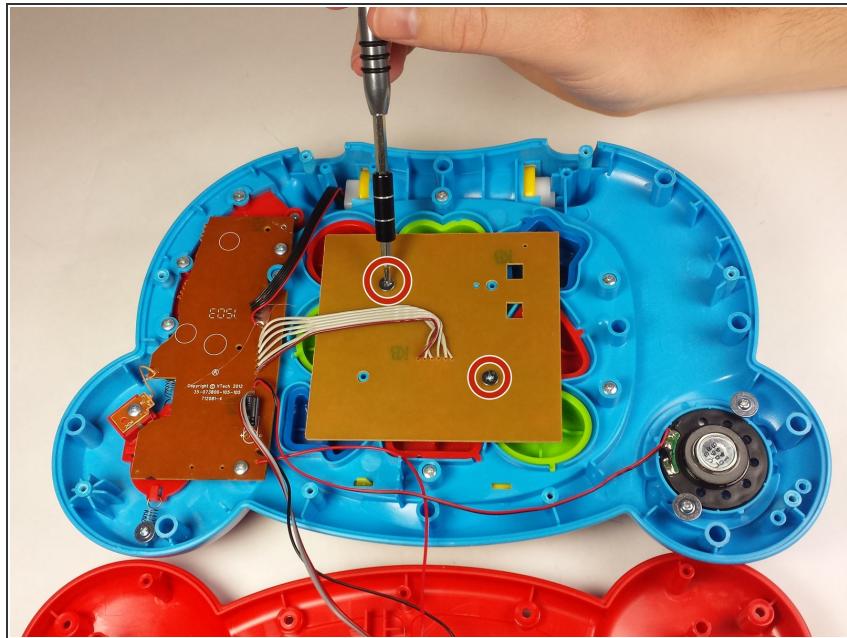

- Using a Phillips #0 screwdriver remove the two 6.0mm screws.

## Step 6

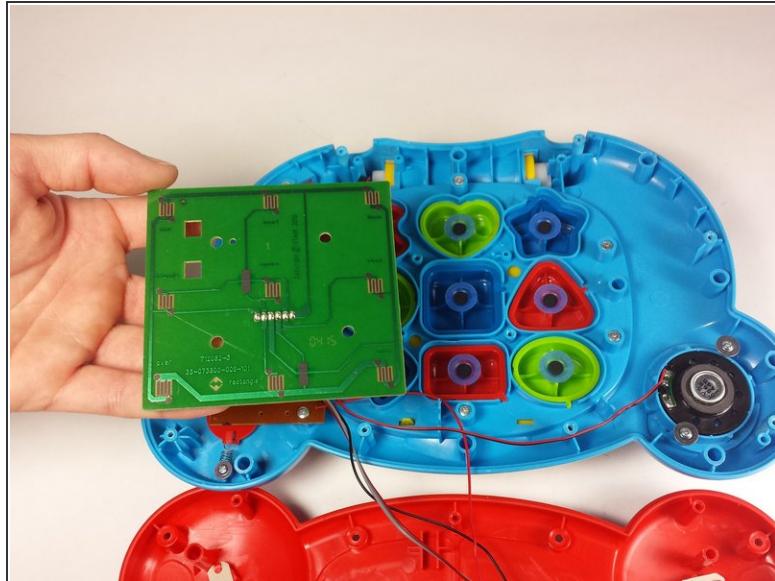

- Lift up on the board and set it aside.

**⚠** Movement of the board will be limited. Be careful not to damage the connection to the motherboard.

## Step 7



- Remove each button and button contact.

To reassemble your device, follow these instructions in reverse order.