



Velocity Micro Cruz Camera Replacement

This guide will show you how to replace your front-facing camera on your Micro Cruz tablet.


Written By: T Smith



 **TOOLS:**



- [iFixit Opening Tools \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)

Step 1 — Remove the Back

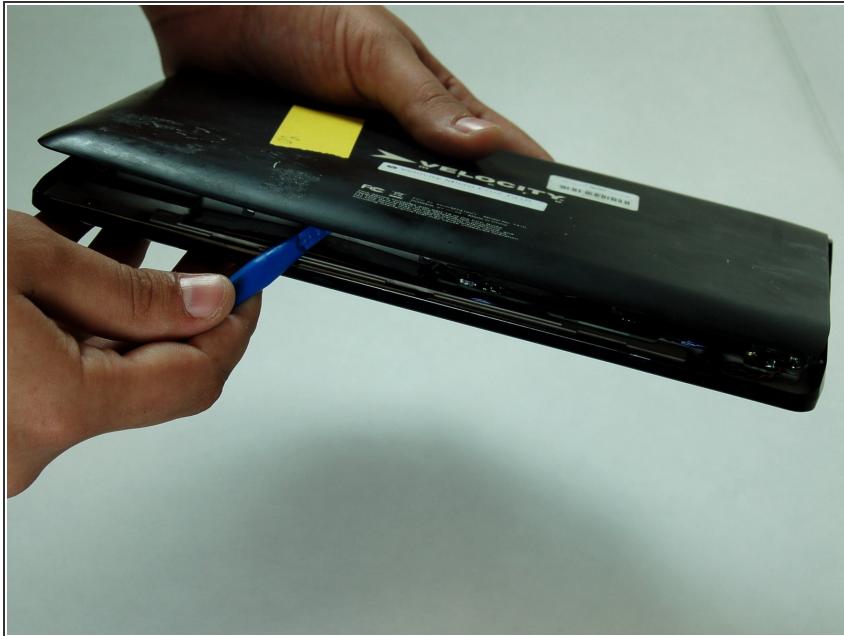



- Using one of the plastic opening tools, separate the plastic back from the tablet in one spot.
- Gently work the tool around the diameter of the tablet until the back pops completely off.

Step 2 — Accessing the Camera

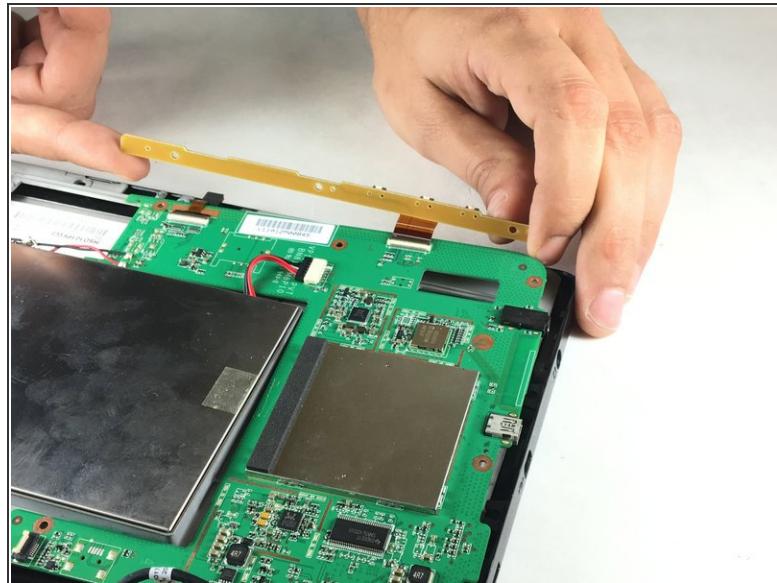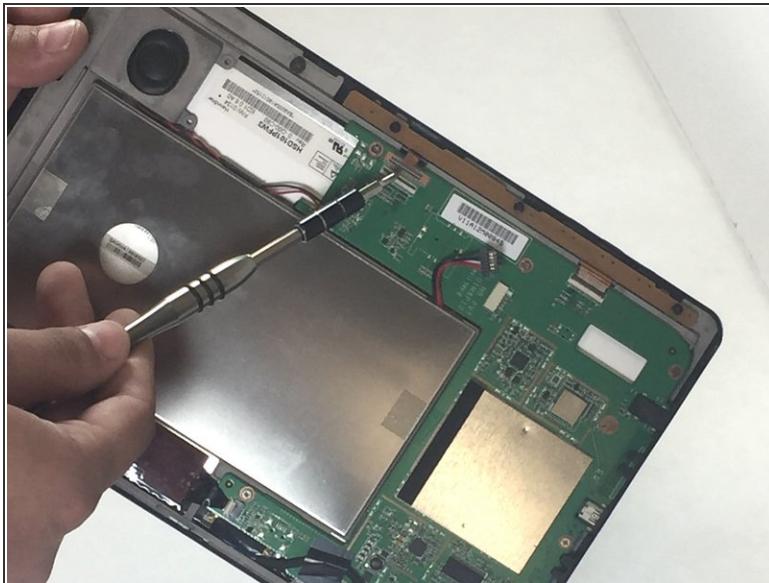

- Locate the camera as illustrated. Remove the 3 black screws at the top of the tablet.
- Gently pull back the yellow piece so that the camera may be accessed.

Step 3 — Remove the Camera

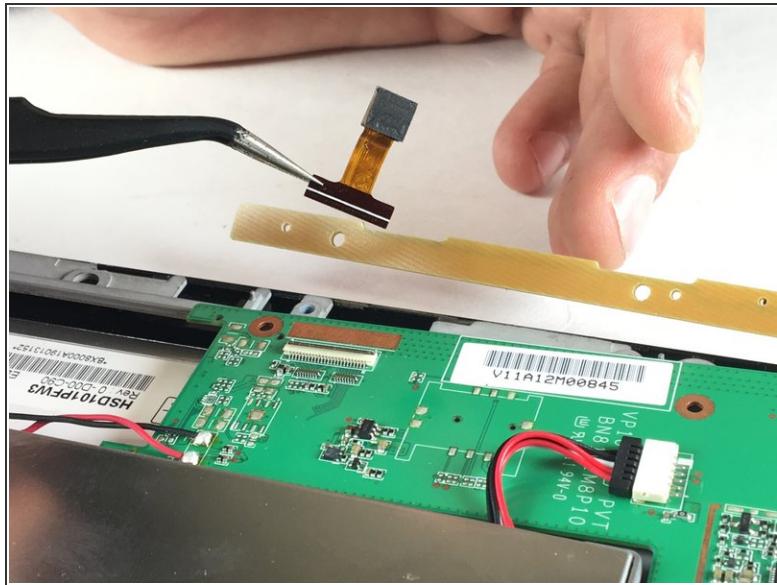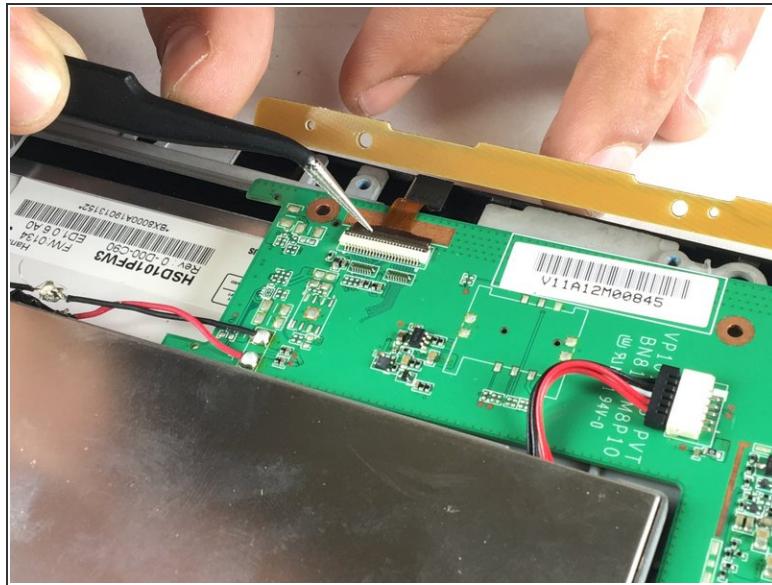

- Use the tweezers to pull back the black latch on the motherboard that holds the camera.
- Finally, use the tweezers to remove the camera from the motherboard.

To reassemble your device, follow these instructions in reverse order.