



Velocity Micro Cruz T301 Battery Replacement

Replace your T301's dying battery.

Written By: Ali Rashid Al Araimi



INTRODUCTION

Use this repair guide to replace the Battery.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Heavy-Duty Spudger](#) (1)
- [Metal Spudger](#) (1)
- [Phillips #0 Screwdriver](#) (1)

Step 1 — Battery




- Insert the plastic opening tool in the SD port. The edge point should be pointed towards the rear panel.

Step 2




- Insert a small opening tool between the rear panel and the tablet.

Step 3

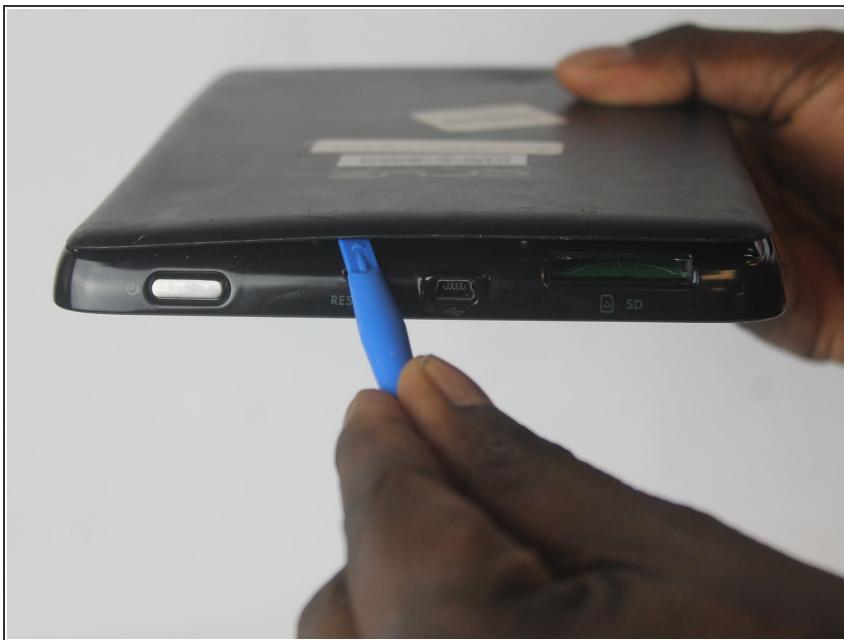


- The large opening tool is not needed any more.

Step 4

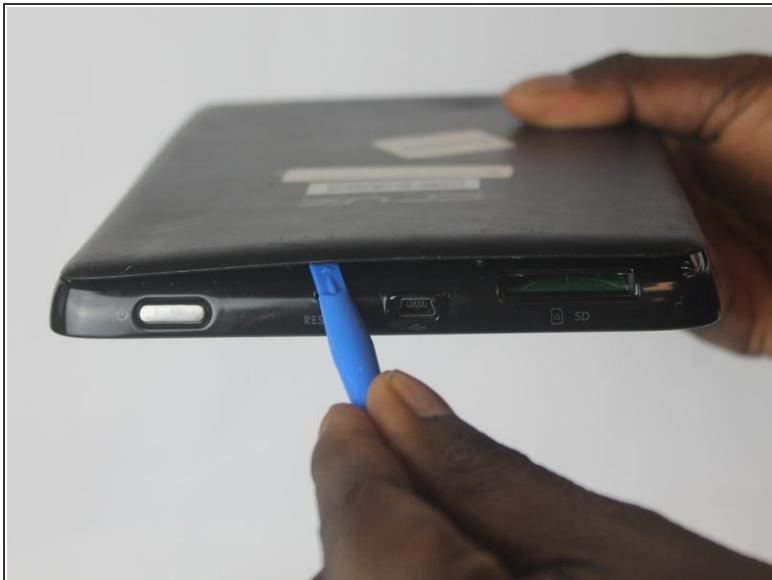

- Move the small tool opener around the rear panel to free the 12 edges.

Step 5

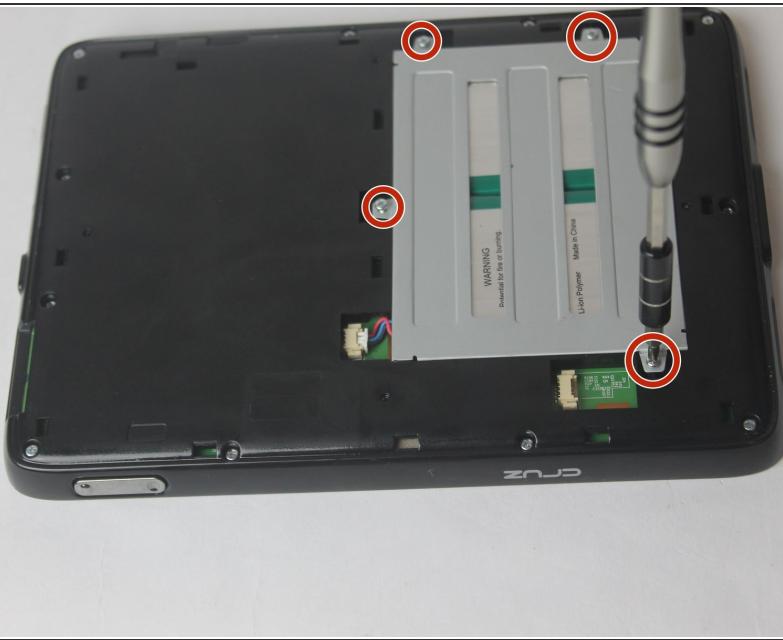

- Using PH0 Phillips Driver, remove the 4 Screws in the Metal part.

Step 6



- Using a plastic Spudger remove the battery connector.

Step 7



- Lift the battery out of its place with a nylon spudger.

⚠ This photo shows the use of an incorrect tool. Always use an ESD safe tool, like the nylon spudger, when dealing with delicate components.

To reassemble your device, follow these instructions in reverse order.