



# Velocity Micro Cruz T301 Speakers Replacement

Replacing your defective speakers for optimum sound quality.

Written By: Ali Rashid Al Araimi



## INTRODUCTION

If you want to replace speakers of your velocity micro T301 tablet, please follow the steps in this guide to get it done.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Metal Spudger](#) (1)
- [Heavy-Duty Spudger](#) (1)
- [Phillips #0 Screwdriver](#) (1)

## Step 1 — Speakers




- Insert the plastic opening tool in the SD port. The edge point should be pointed towards the rear panel.

## Step 2




- Insert a small opening tool between the rear panel and the tablet.

## Step 3

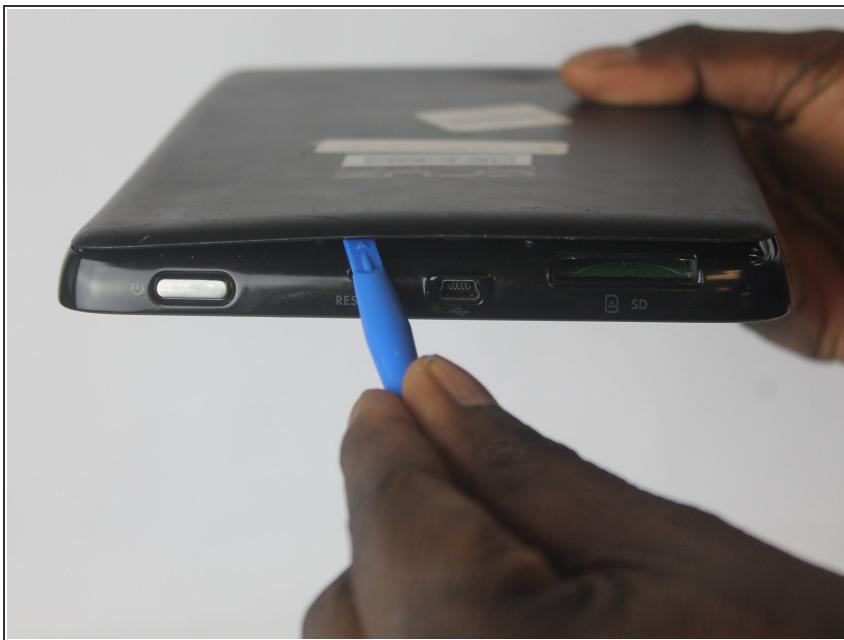


- The large opening tool is not needed any more.

## Step 4

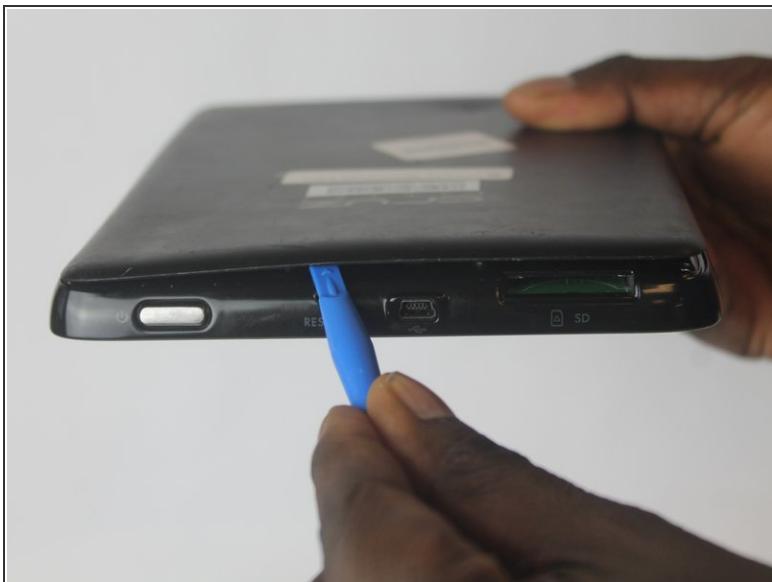


- Move the small tool opener around the rear panel to free the 12 edges.

## Step 5

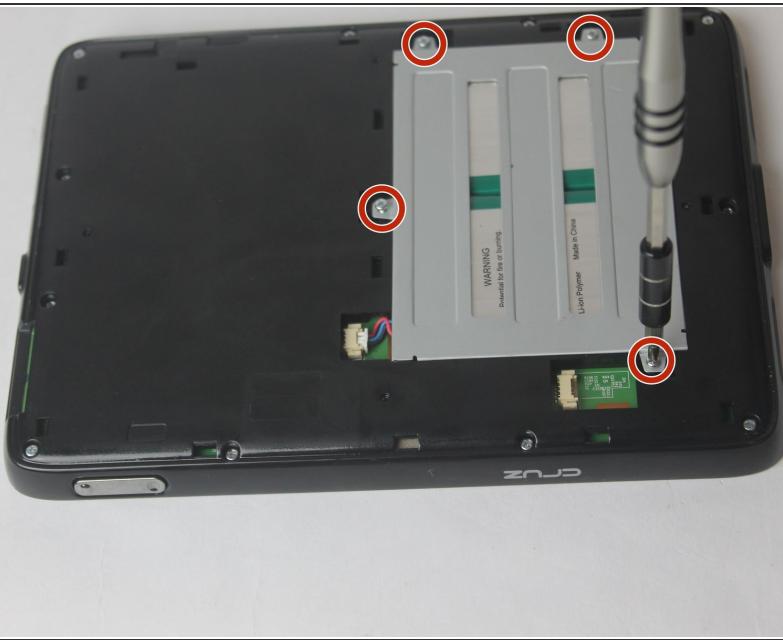

- Using PH0 Phillips Driver, remove the 4 Screws in the Metal part.

## Step 6

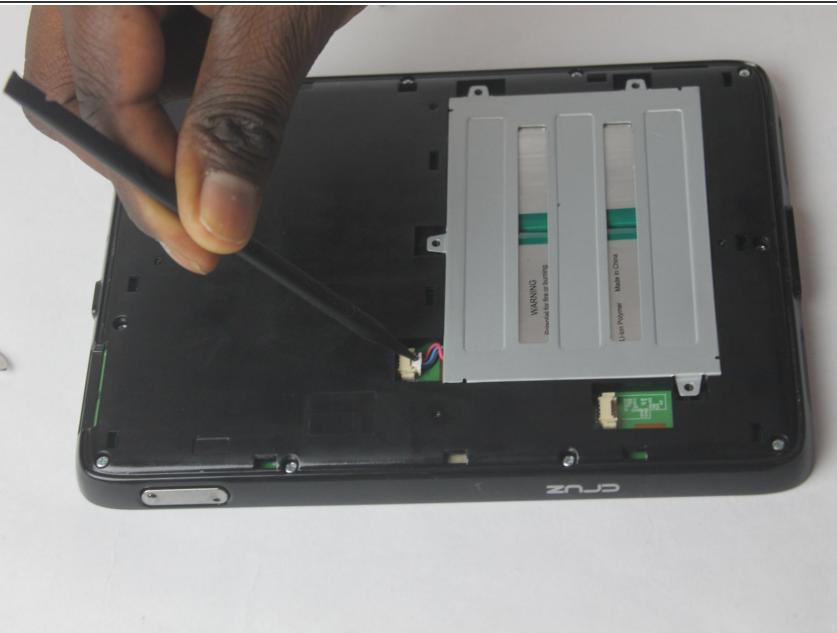

- Using a plastic Spudger remove the battery connector.

## Step 7



- Lift the battery out of its place.

## Step 8



- Using PH0 Phillips Driver, remove the 12 Screws in the cover.

## Step 9




- Place a metal Spudger between the tablet and the back cover.

## Step 10



- Move the spudger around the tablet to release the clips attached to the tablet.

## Step 11

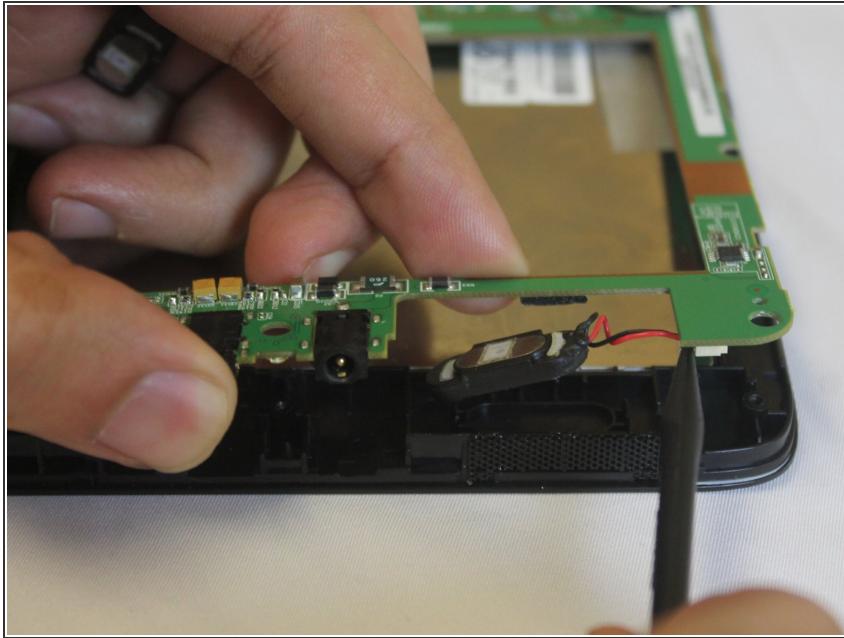

- Use a plastic spudger to release the connection between the speakers and the motherboard as shown in the picture.

To reassemble your device, follow these instructions in reverse order.