




Verizon Ellipsis 10 Speaker Replacement

How to remove and replace the Verizon Ellipsis 10 speaker. Model number: QTAIR7.

Written By: Mary Duran

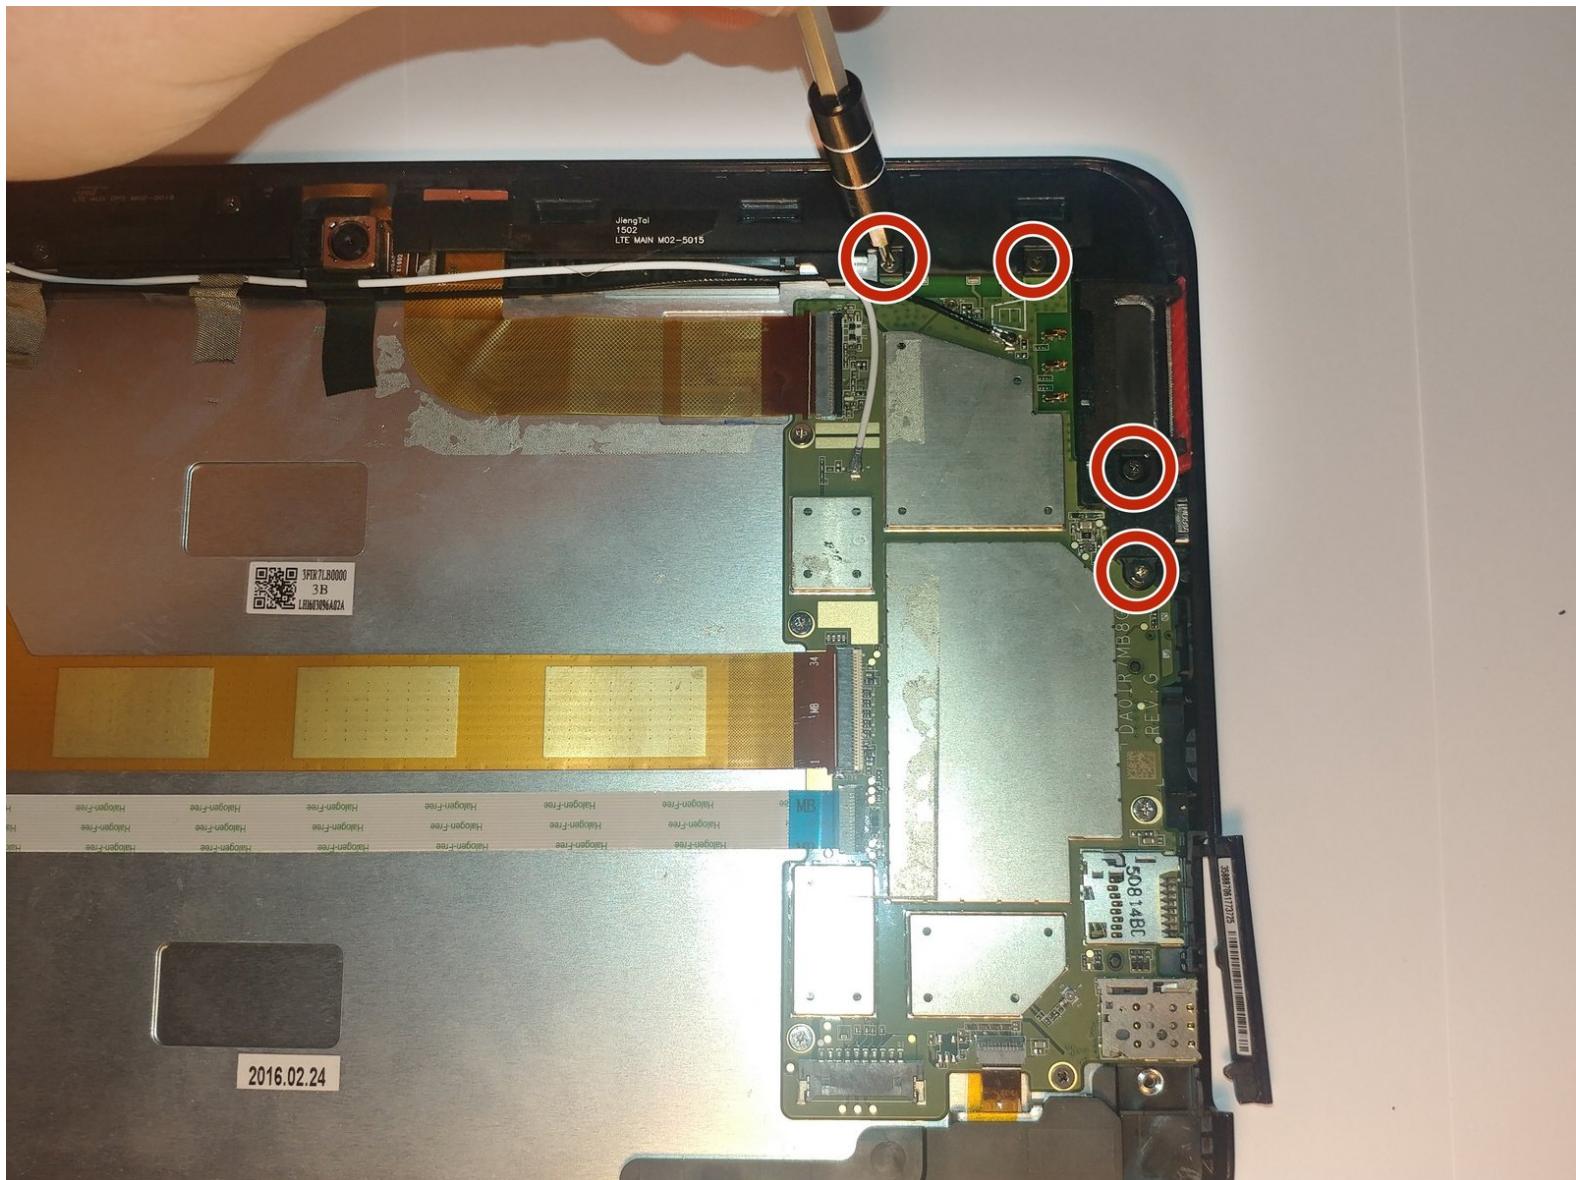

INTRODUCTION

This guide is designed to provide you with simple steps to remove and replace the Verizon Ellipsis 10 Speaker.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)

Step 1 — Back Cover




- Open the SD/SIM card cover to start prying off the back cover.

Step 2



- Start using the iFixit Opening Tool in the SD/SIM area to release the clips holding the back panel on.

Step 3

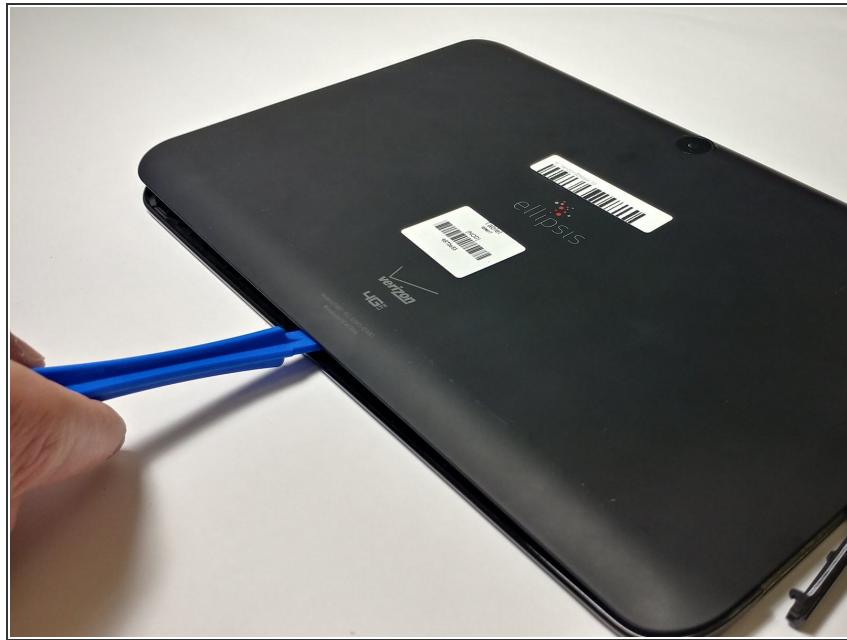

- Follow along the edge of the device to undo all of the retaining clips.

Step 4




- Once all the clips are undone, the back panel should come off with little effort.

Step 5 — Battery




- Remove the bottom piece of tape securing the battery making sure you are not peeling up anything else in the process.

Step 6

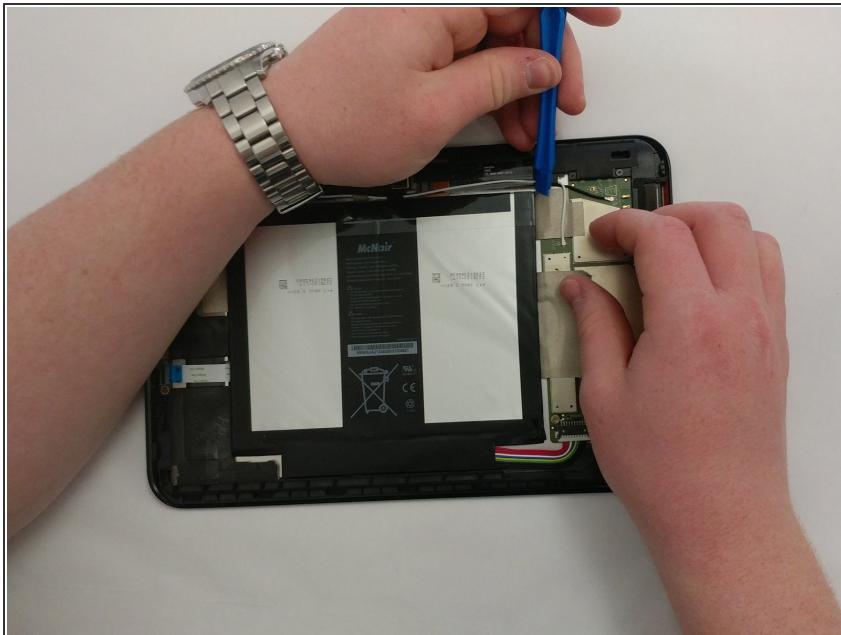

- Remove the top piece of tape. You can use the iFixit opening tool to get a hold on it.

Step 7

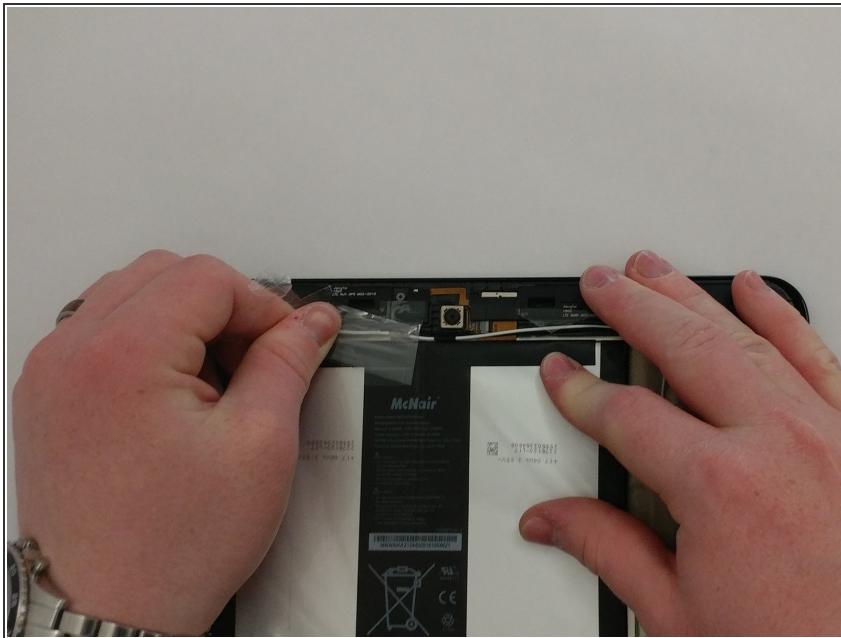


- Once you have a hold on the tape, carefully remove it making sure you aren't damaging the battery in the process.

Step 8




- Unplug the battery power connector by sliding the white plastic plug down away from the board.

Step 9

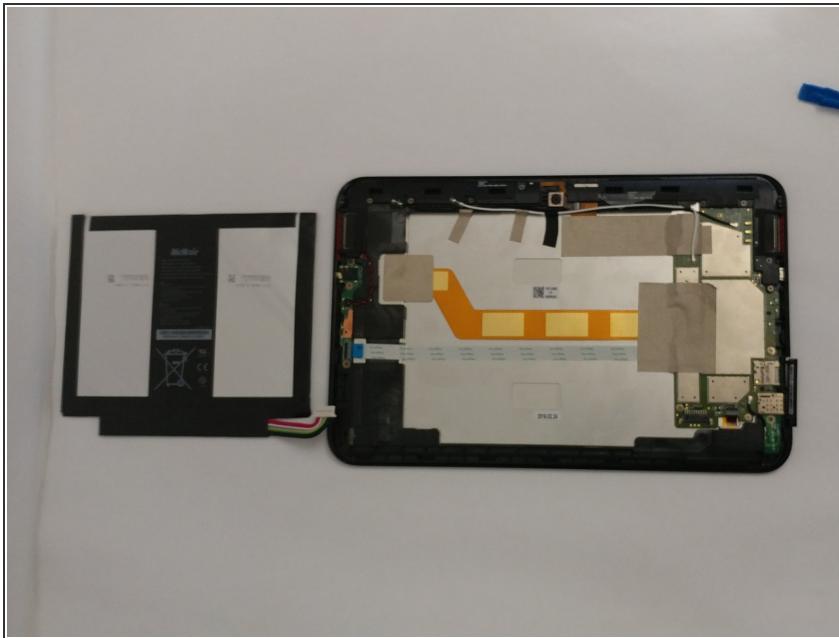


- The battery should be free to come out of the device. Make sure not to bend or damage the battery.

Step 10 — Speaker

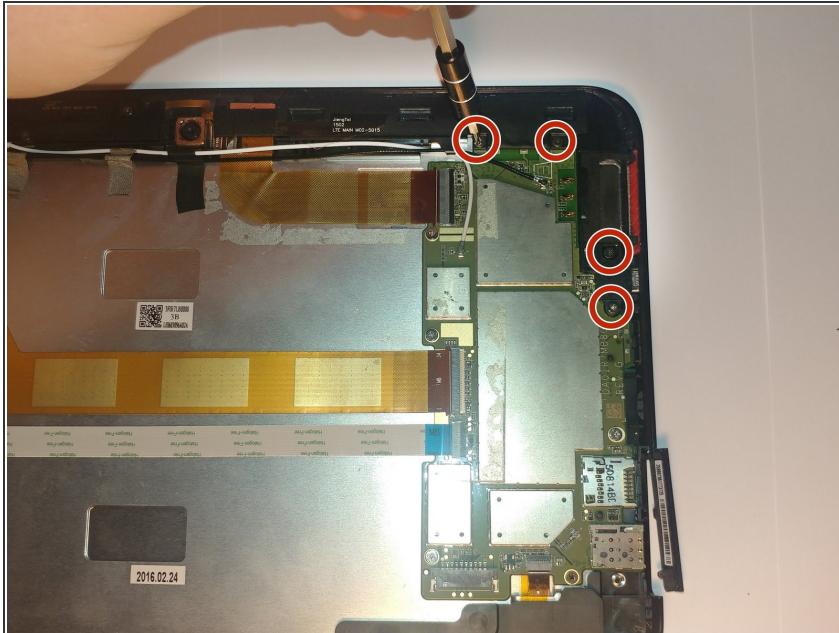


- Using a Phillips #00 screwdriver, remove the four M1.5 screws from the right speaker and remove from its position

Step 11

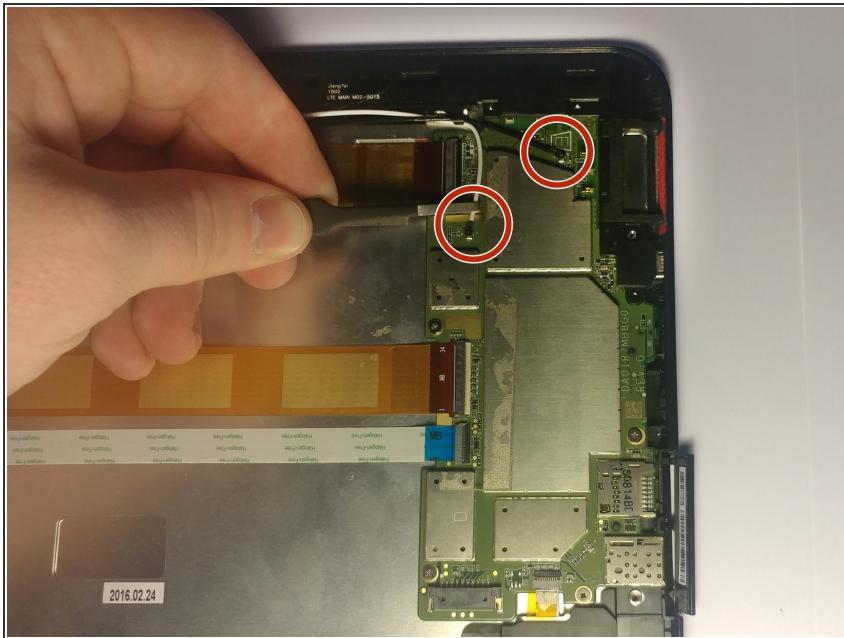

- Remove the black and white wires connected to the motherboard by pulling up on their connections.
- Remove the three strips of tape.

Step 12

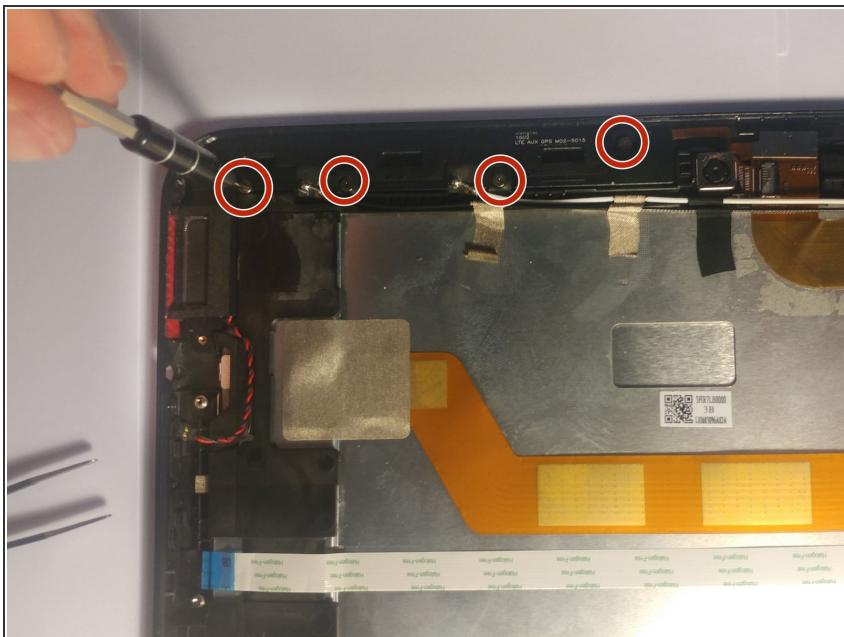

- Remove the four M1.5 screws on the left speaker and remove from its position.

To reassemble your device, follow these instructions in reverse order.