



Verizon Ellipsis Jetpack MHS800L Battery Replacement

This guide will show the you how to replace the battery.

Written By: Richard J Porras



INTRODUCTION

What you can expect from this guide is a step by step process on how to remove the battery on a Verizon Ellipsis Jetpack MHS800L.

TOOLS:

- [Metal Spudger Set](#) (1)
- [64 Bit Driver Kit](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Jimmy](#) (1)
- [Tweezers](#) (1)

Step 1 — Plastic Case




- Remove the SIM card, that is located on top of the Jetpack.

Step 2



- With the device on its back and the label facing you, remove the rubber screw cover on the top left corner of the device.
- Under the rubber circle, remove the 1.25 mm screw using a Philips #00 screwdriver.
- *(i)* You may need to peel back a piece of double sided tape covering the screw hole.

Step 3

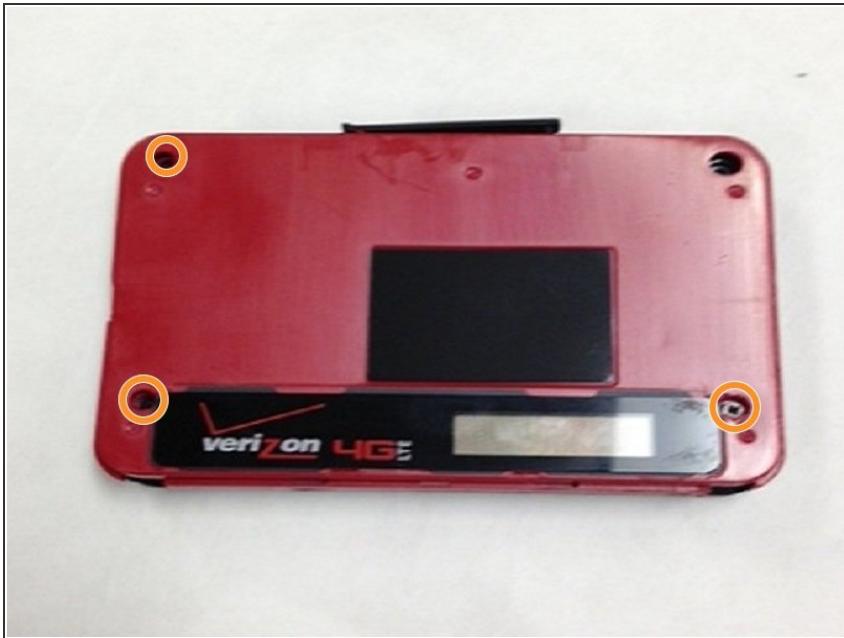


- Remove three 1.25 mm screws.

Step 4



- Use a plastic opening tool at the seams and pry open the case.

Step 5

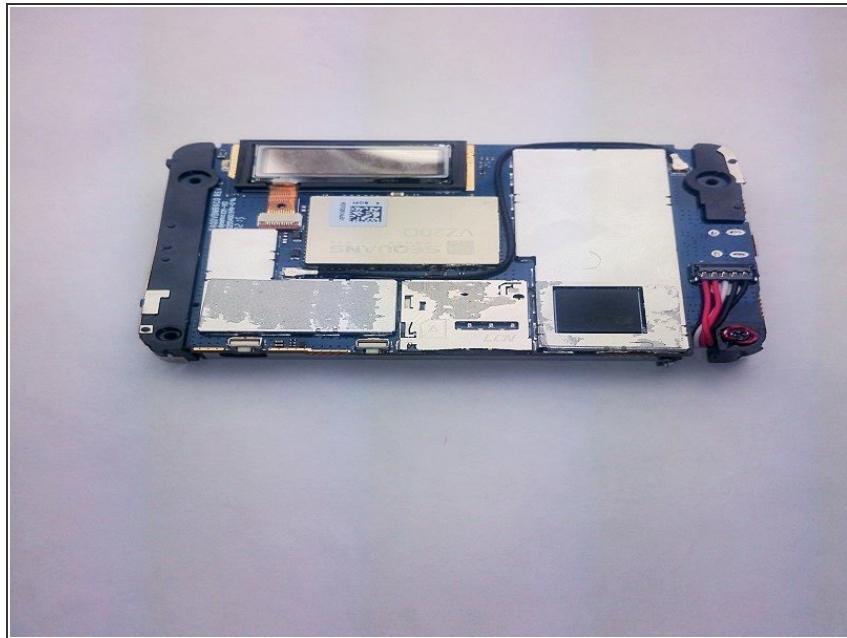

- Once the cover is off, this is what your device will look like.


Step 6 — Battery



- Once you have the case off of your device gently pull your battery away from the device.


⚠ Do not attempt to completely remove the battery, as it is still attached to the motherboard by wires.

Step 7

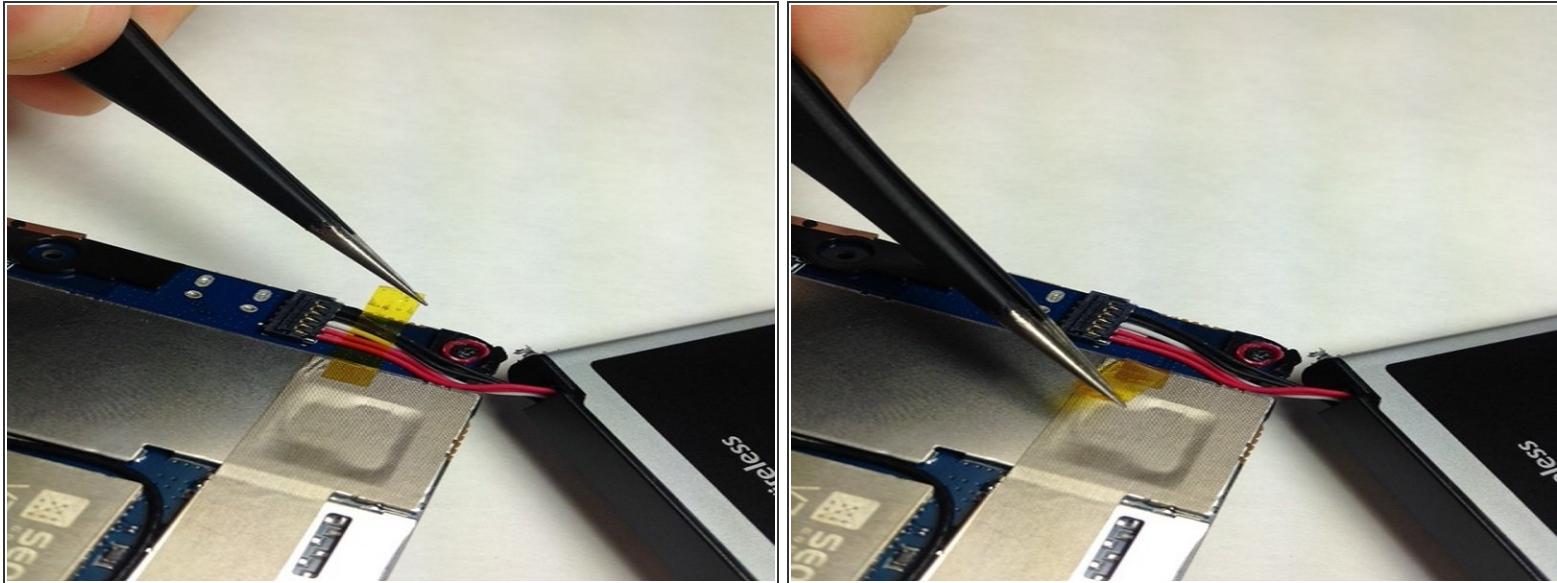

- With a pair of ESD Tweezers remove the yellow tape covering the battery wires.


Step 8

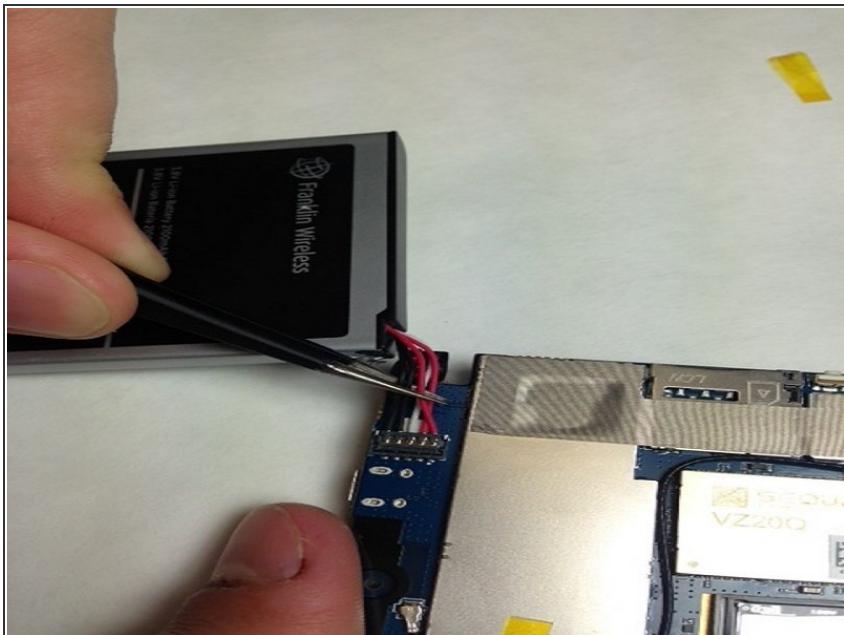

- After removing the tape you may use the ESD Tweezers to remove the wiring harness from the circuit board.

⚠ Do not squeeze the wires to hard you may damage them and cause a short.

Step 9

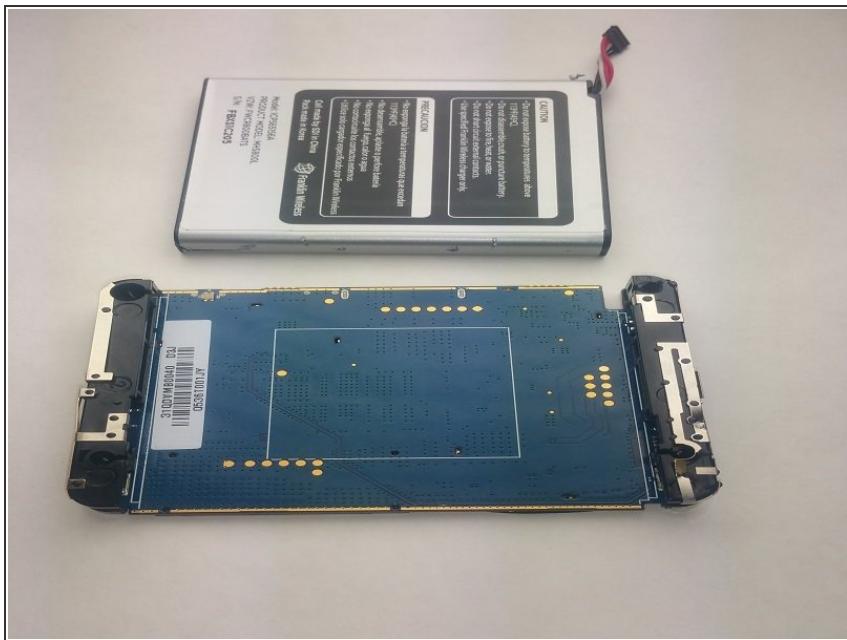

- You may now replace the battery in your Verizon Ellipsis Jetpack MHS800L.

To reassemble your device, follow these instructions in reverse order.