



Vinotemp VT-12TEDi Power Cord Replacement

Install a new or reinstall a repaired power cord.

Written By: Jeff Snyder



 **TOOLS:**

- Phillips #2 Screwdriver (1)
- 7 mm Nutdriver (1)

Step 1 — Power Cord




- Remove nine 12mm Phillips screws from the upper back panel.
- Remove three 12mm Phillips screws inset under the back panel.

⚠ As soon as the screws are removed, the panel will fall freely.

(i) When replacing the twelve 12mm Phillips screws, do not tighten the fasteners until all twelve screws have been loosely fitted back onto the cooler. This will ensure the flimsy metal casing will not warp.

Step 2

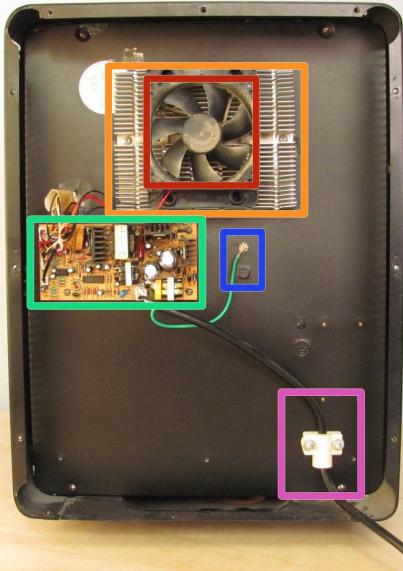

- Power Cord Fastener
- Ground
- Motherboard
- Heat Sink Fan
- Heat Sink

Step 3





- Remove two 7mm Hex Nuts.

i Clearance is minimal and these screws are very tight. You will likely need a socket wrench to avoid stripping.




! If the white plastic components stick, pry them apart with a metal spudger. Don't pull on the power cord to get plastic pieces to separate.

Step 4

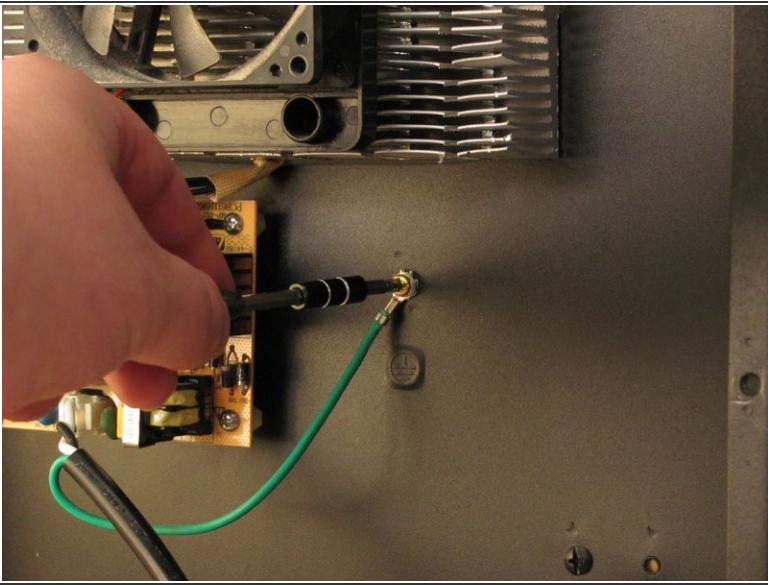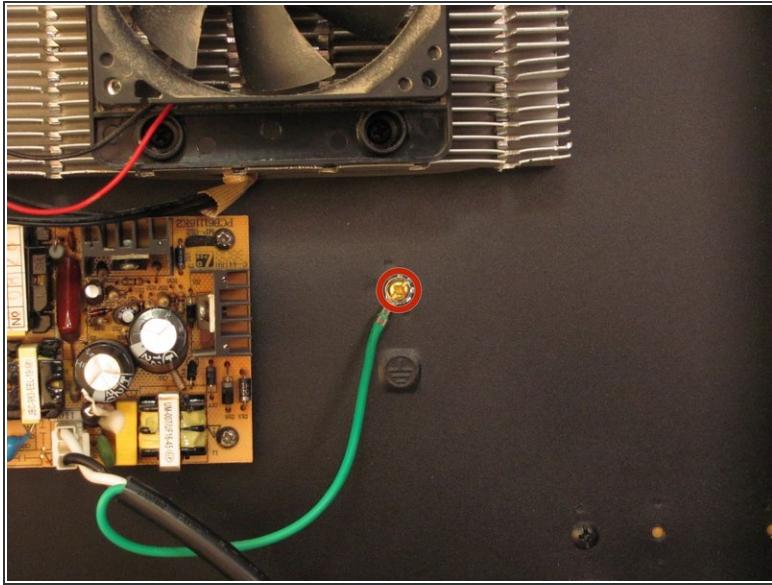

- Remove one 12mm Phillips screw securing ground.

Step 5

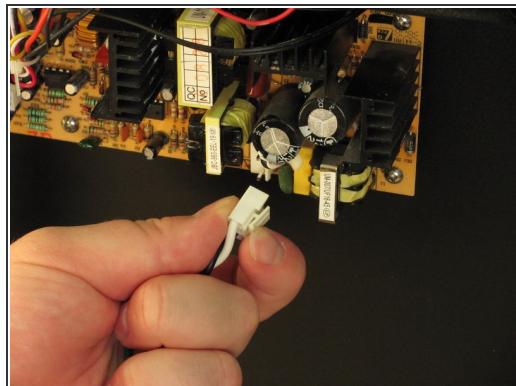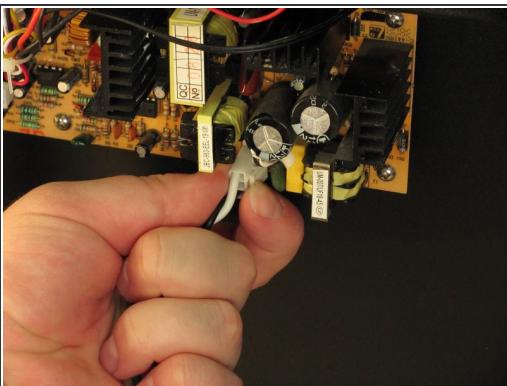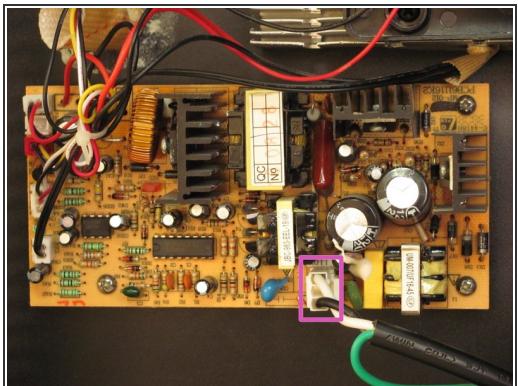

- Remove power cable from motherboard.

⚠ Pinch cable connector to release it from the motherboard, then pull.

Step 6



- Your power cord is removed.

To reassemble your device, follow these instructions in reverse order.