



# Vivitar Vivicam T027 Screen Replacement

Learn how to replace the screen of your Vivitar Vivicam T027.

Written By: Nicole Knoebel



# INTRODUCTION

Replace your screen if it is cracked or otherwise damaged.

## TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Screen




- Remove the 3 mm screws at the sides of the camera using a Phillips #00 screwdriver.

## Step 2




- Remove sticker on top of camera as it covers a screw.
- *(i)* There should be 5 screws to remove in total on the sides of the camera.

## Step 3

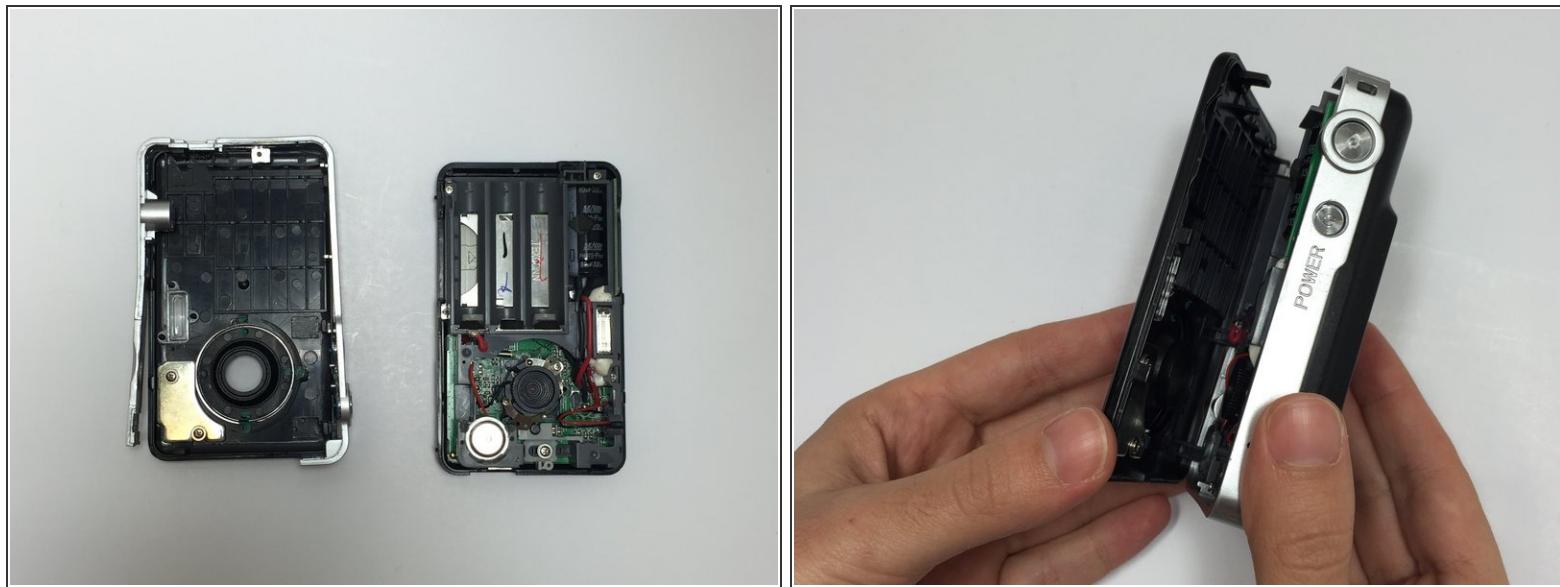


- Separate the front piece of the camera from the back, revealing the motherboard.

## Step 4

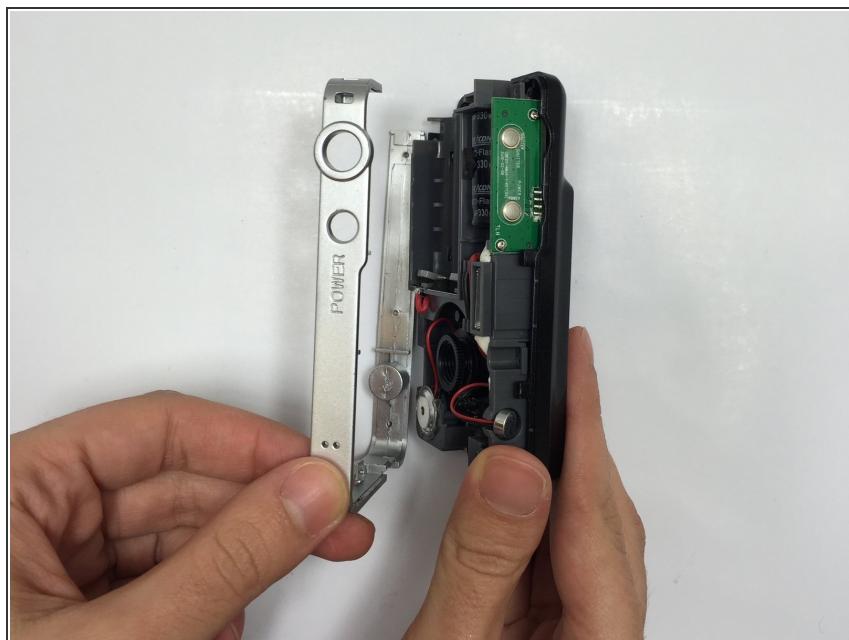


- Remove plastic silver strip from the front case of the camera.

## Step 5

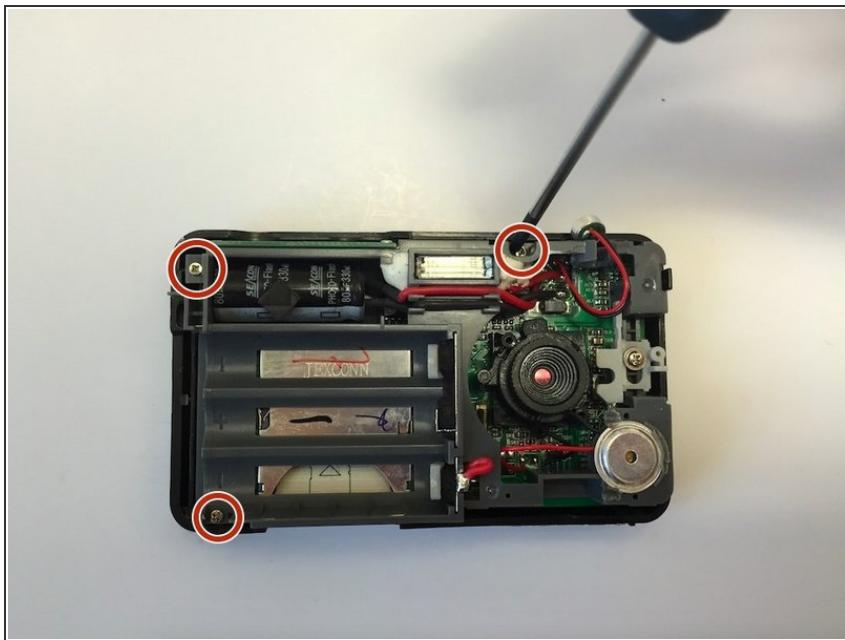


- Remove the three 2 mm screws holding in the gray plastic piece using a Phillips #00 screwdriver.

## Step 6

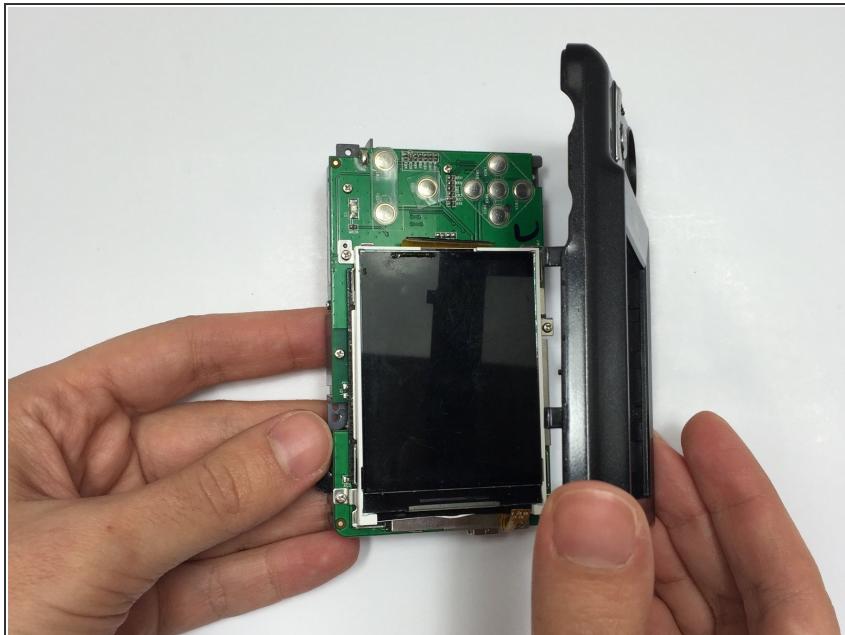

- Remove the black plastic cover to reveal the newly exposed screen.

## Step 7

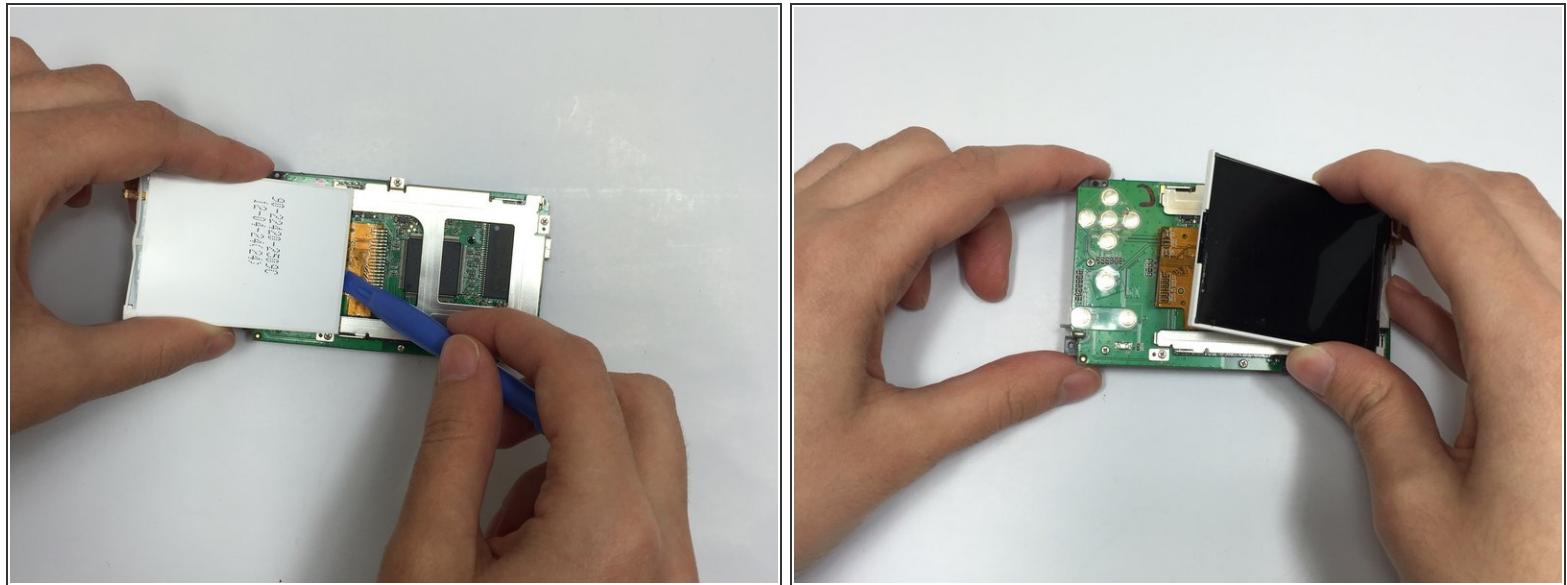

- Carefully remove gold film from the screen with a plastic opening tool.
- Gently pull the screen off the camera.

To reassemble your device, follow these instructions in reverse order.