




Wen 2307 Power Cable Replacement

Replace the main power cable when it is damaged.

Written By: Sergio Palacio

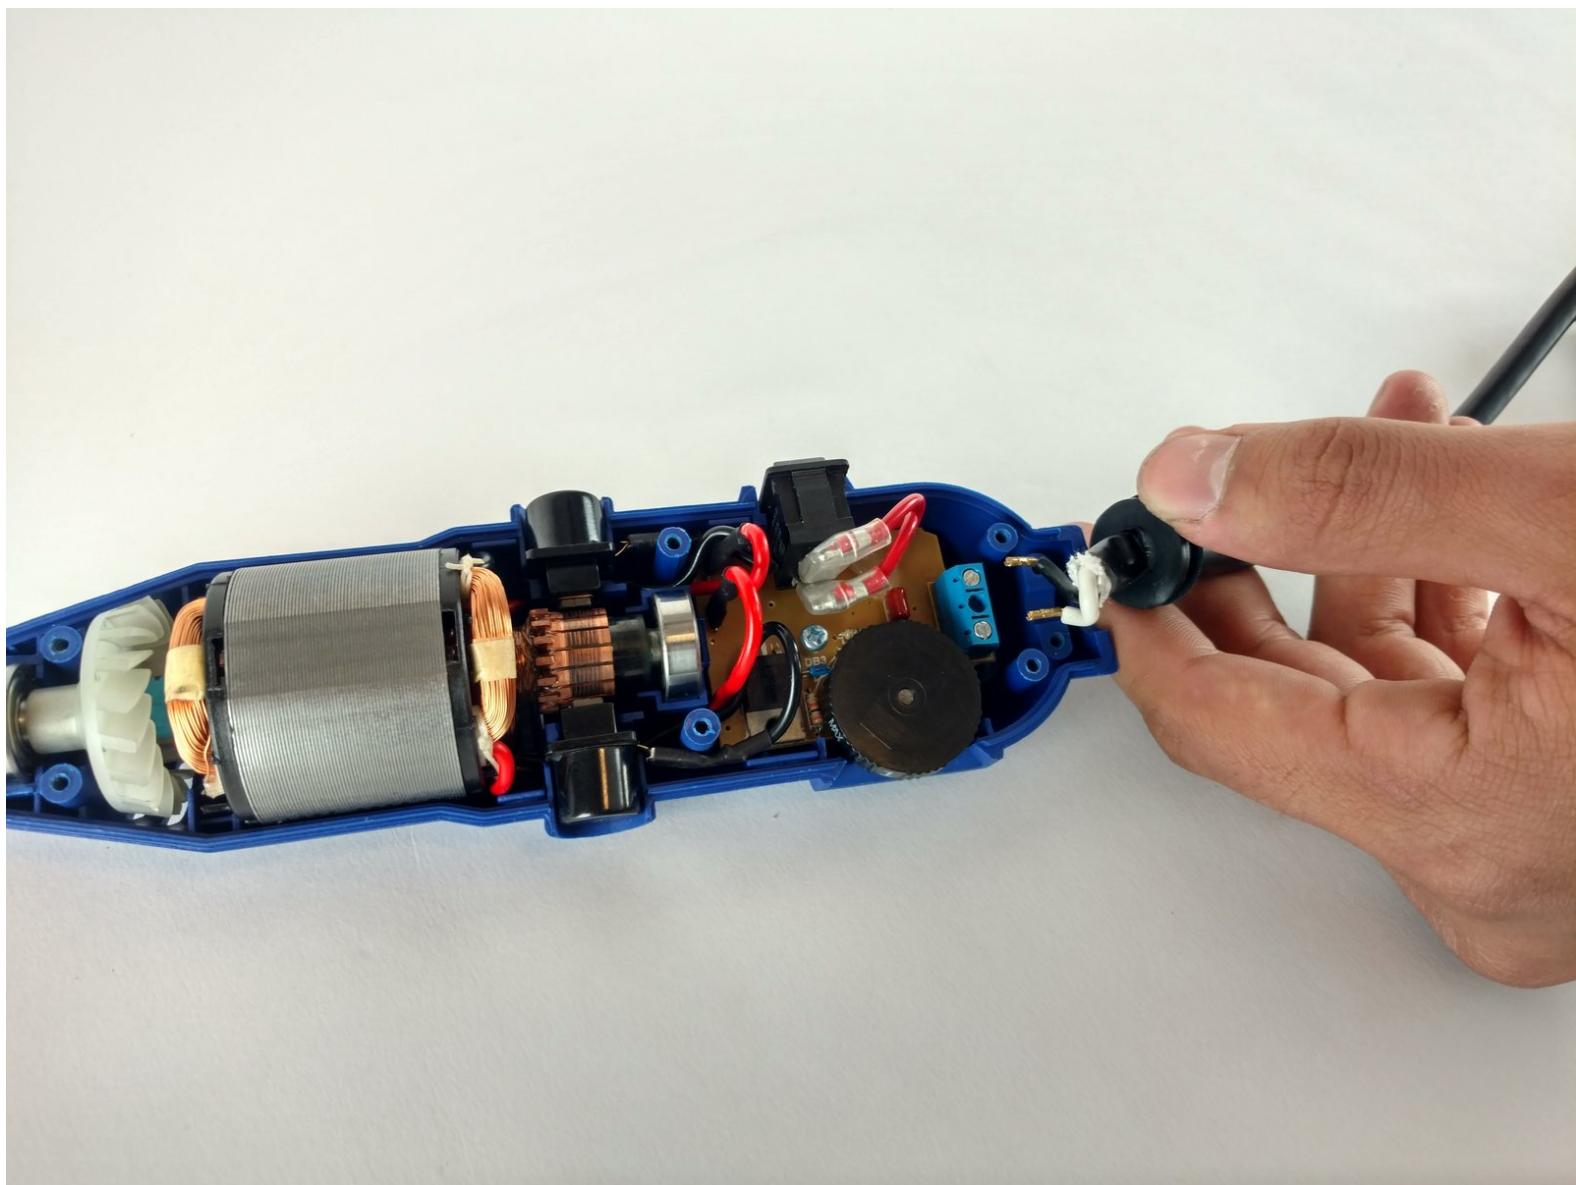

INTRODUCTION

If your device is not powering on your power cable may be damaged. If it needs to be replaced this guide will show you how.

TOOLS:

- **Phillips #2 Screwdriver** (1)
- **Flathead 3/32" or 2.5 mm Screwdriver** (1)

Step 1 — Front Panel



- Unscrew the locking sleeve.

Step 2



- Remove the hanging clip.

Step 3




- Unscrew the six 8mm PH2 screws.

Step 4



- While pressing the spindle lock button, unscrew the collet nut and remove it along with the brass collet.



Step 5

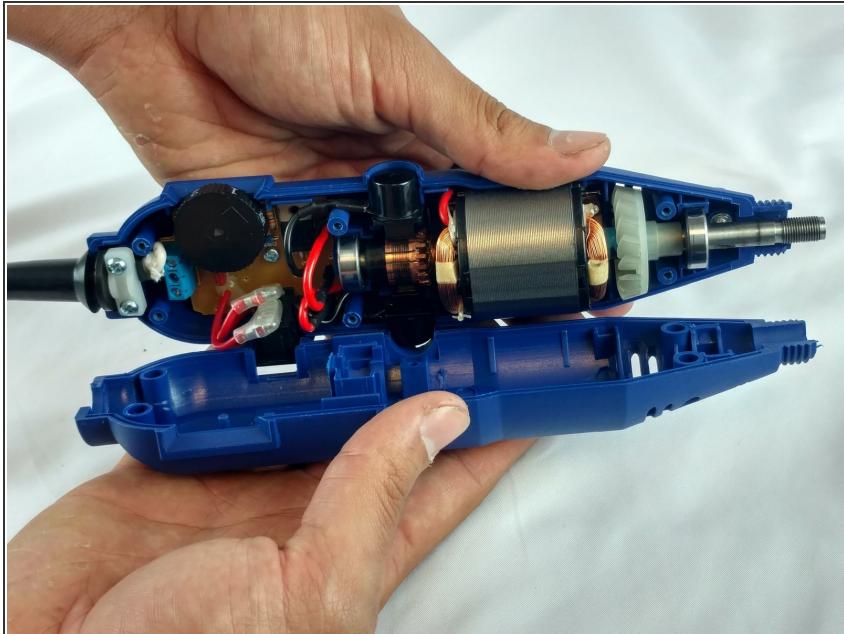

- To remove the front panel, pry the device apart while holding the device with the other hand.


i The front panel should come out easily.

Step 6 — Power Cable

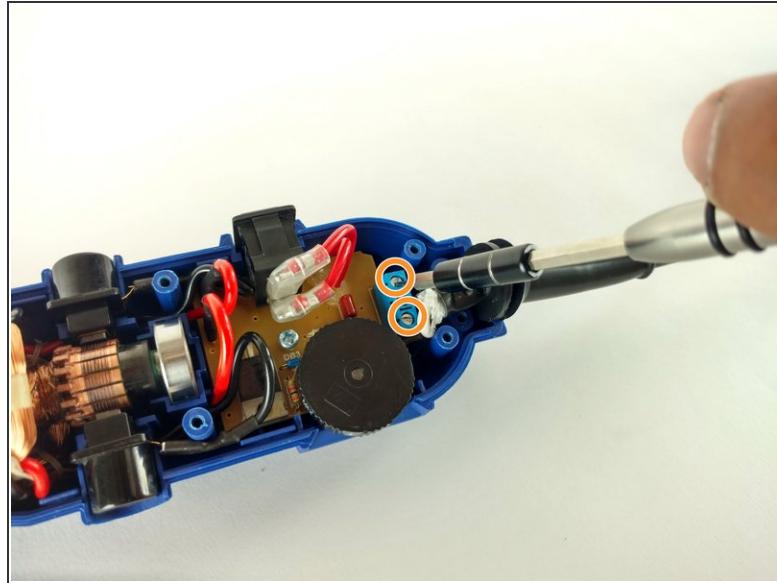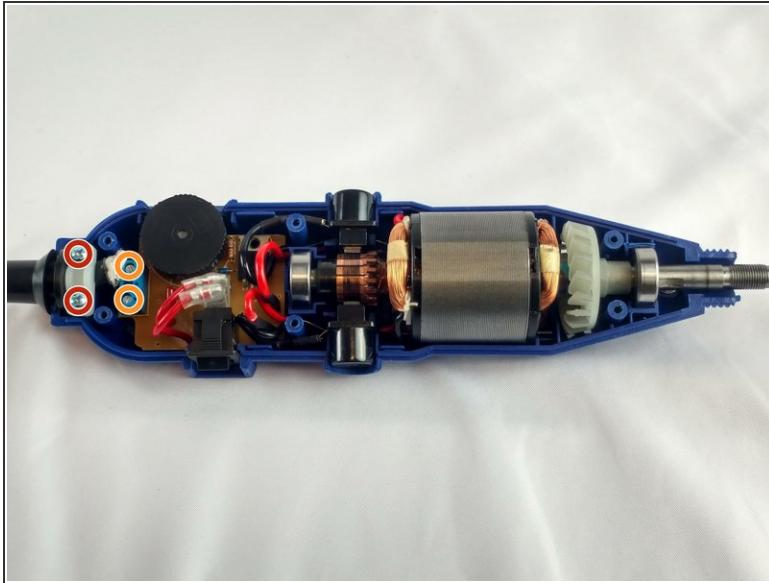


- Identify the screws.
- Unscrew the two 3mm phillips PH2.
 - ⓘ Don't forget to put them apart from the ones unscrewed before.
 - ⓘ Don't forget to put them apart from the ones unscrewed before.
- Phillips PH2
- Flathead 2.5mm

Step 7

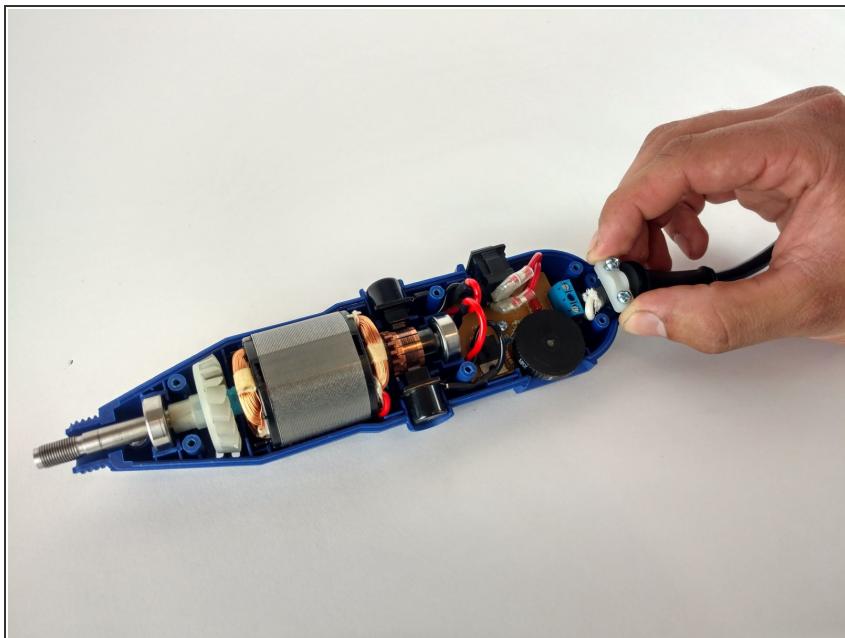

- Remove the place boar carefully.

Step 8

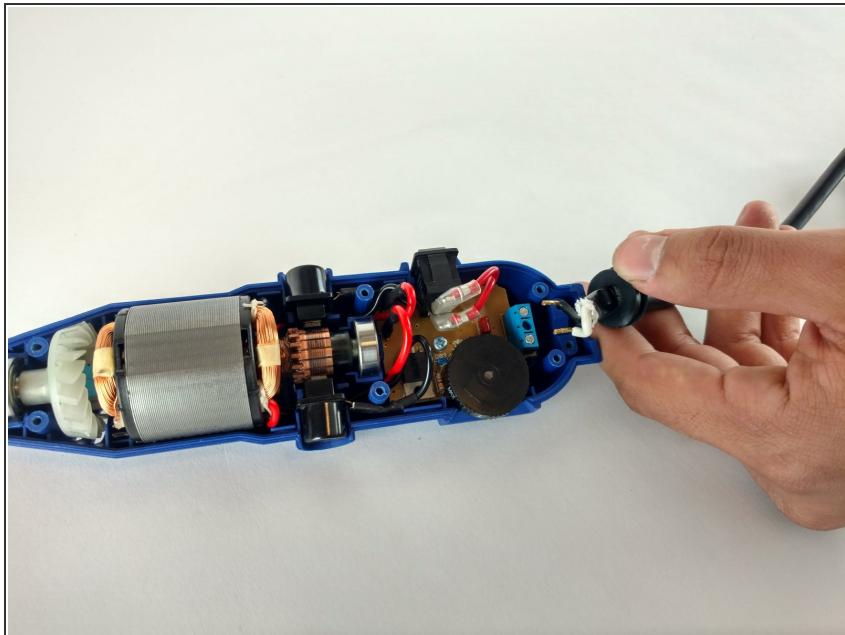

- Pull out the power cable connectors.

Step 9



- Pull out the cord sleeve for the new cable replacement.

To reassemble your device, follow these instructions in reverse order.