



Wiko Getaway Screen Panel Replacement

We will disassemble the whole phone to change the screen.

Written By: Alexandre Isaac



 **TOOLS:**

- Spudger (1)
- Phillips #00 Screwdriver (1)
- Hot Air Rework Station Hakko FR-810 (1)

Step 1 — Back cover





- Broken screen ? that's a pity
- You'll need hot air. Not too much thought, you'll melt the plastic otherwise
- Now just pry it open SLOWLY and apply heat.

Step 2 — Disconnect stuff





- Nice, I see you've got the cover off
- Disconnect the battery (not with a metal tool)
- Disconnect the touch screen ribbon (don't pull hard, you have to lift the plastic bit before)

Step 3 — Disconnecting more stuff

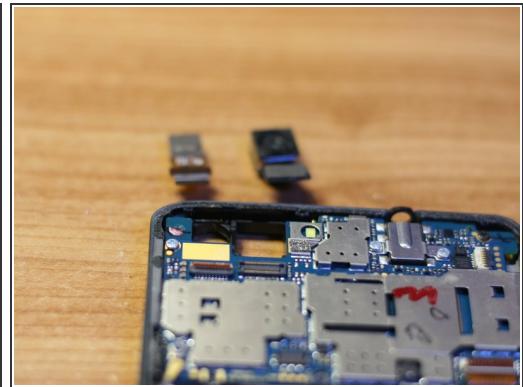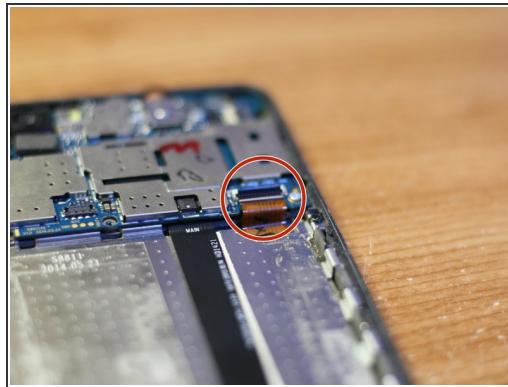

- Get the battery out (don't bend it too much)
- Disconnect the LCD ribbon
- Disconnect the cameras

Step 4 — Screws ! Finally

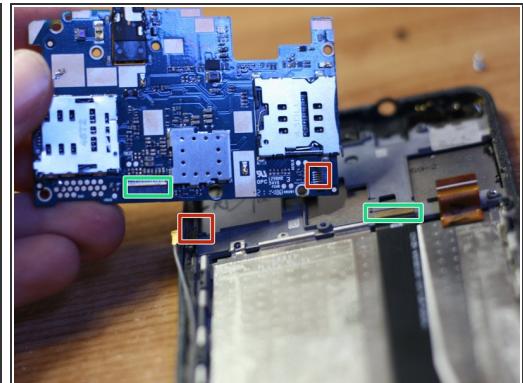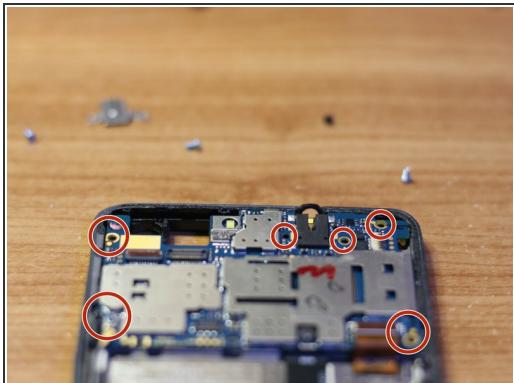

- Unscrew anything you see
- Take the SIM trays out
- Take the motherboard out. You will have to disconnect two ribbon cables

Step 5 — Final



- Two screws here
- To take this guy out, you can use heat again
- Aaaaand with more heat, you will get the screen panel out !

To reassemble your device, follow these instructions in reverse order.