



# X-Treme Tablet Generation 2 Speaker Replacement

How to replace a speaker for an X-Treme Tablet Generation 2.

Written By: Kristen John



## INTRODUCTION

Before proceeding, make sure you have all the necessary parts and tools for this replacement guide. This is over the replacement of the speaker for XTreme Tablet Generation 2. Use safety glasses and gloves when applicable.

### TOOLS:


- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)
- [Soldering Iron](#) (1)

## Step 1 — Speaker



- Using a spudger and pry tool, remove the back cover. Start at the top corner, and carefully pry the back cover off of the main body.
- Continue around the device, being careful to not dislodge the power button.

## Step 2

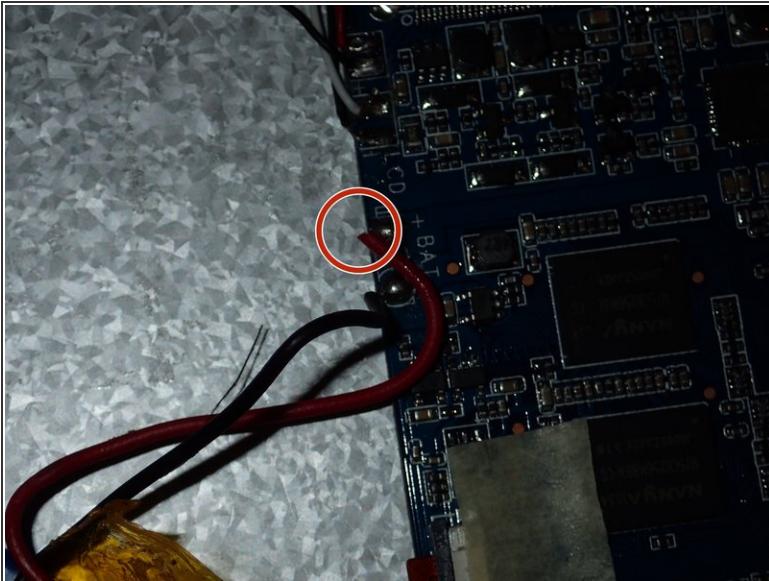

- Using a solder vacuum and soldering iron, release the red wire from the motherboard first, then release the black wire.
- The speaker is held on the back cover with adhesive tape. Using a pry tool, carefully pry the speaker from the back cover.

To reassemble your device, follow these instructions in reverse order.