



# Xgody D300 Camera Replacement

Use this guide to replace the camera in your Xgody D300 phone.

Written By: Kiara Richardson



This document was generated on 2020-01-07 02:12:14 AM (MST).

## INTRODUCTION

For problems pertaining to poor camera quality, please read this guide. This guide is for replacing the back-facing Camera on the Xgody D300. Please follow the steps carefully. By the end, your phone should be working as it normally should.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Magnetic Project Mat](#) (1)
- [ESD Safe Tweezers Blunt Nose](#) (1)
- [Phillips #00 Screwdriver](#) (1)

### PARTS:

- [Replacement Camera](#) (1)

## Step 1 — Battery



- Lay the phone on a flat surface so the back is facing upwards.

## Step 2



- Insert the pry tool into the seam and pry the back cover of the case along the seam until the cover is free of the case.

## Step 3



- Remove the battery using your hands or the plastic opening tool.

## Step 4 — Back-Facing Camera




- Using the Phillips #00 screwdriver, remove the screws that hold the protective housing to the smartphone; there should be 14 screws with a length of 3mm and one screw with a length of 6mm.
- Three of the screws will not come loose from the protective housing and can be identified by a metal plate that is underneath them. In total there is 18.

## Step 5



- Lift the housing along the edges using the opening tool and tweezers.
- ⓘ There will be a sticky pad that holds the housing to the smartphone.

## Step 6

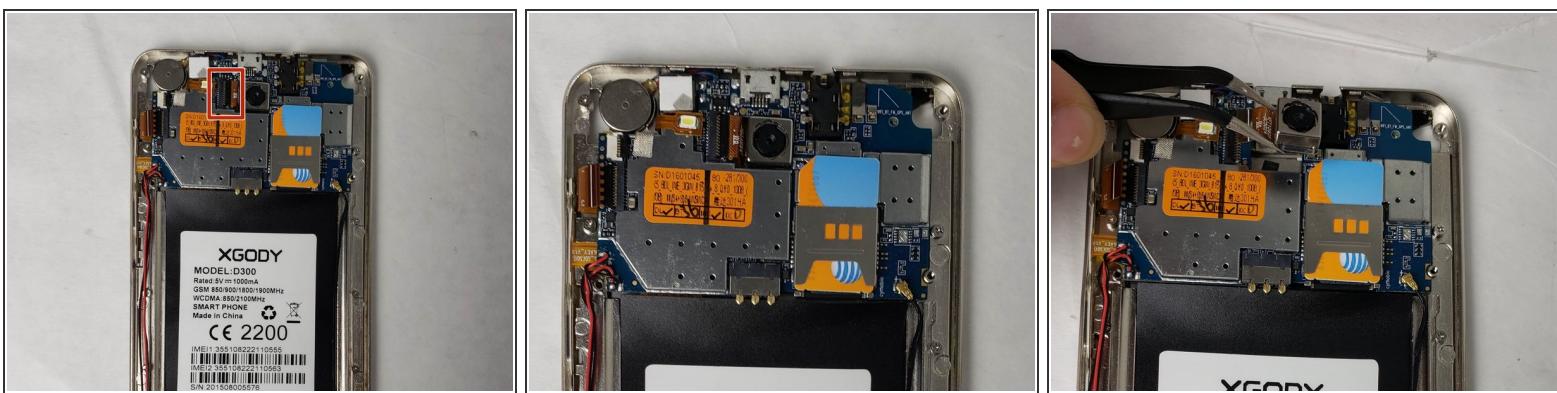

- Disconnect the camera by grabbing the connector with tweezers and firmly pull on the connector until it pops out.
- ⓘ The camera will have a sticky pad on it like the protective housing did and will take a firm tug to come free of the smartphone.

To reassemble your device, follow these instructions in reverse order.