



# Yamaha guitar amp speaker Replacement

Use this guide to replace the speaker on a Yamaha guitar amp.

Written By: Joel H Murphey



## INTRODUCTION

Use this guide to replace the speaker on a Yamaha guitar amp.

### TOOLS:

- Phillips #0 Screwdriver (1)

## Step 1 — speaker



- Turn the amp around until you can see 2 screws on the back-bottom of the amp.

## Step 2



- Using the Phillips #0 screwdriver, remove the two screws found at the back-bottom of the amp.

## Step 3



- Remove the plate found at the back-bottom that you removed the screws from.
- The speaker should no longer be obstructed.

## Step 4




- Remove the four screws on the corners of the speaker that are holding it in place.

## Step 5



- Remove the speaker from the amp in order to more clearly see the 2 wires connecting it.

## Step 6

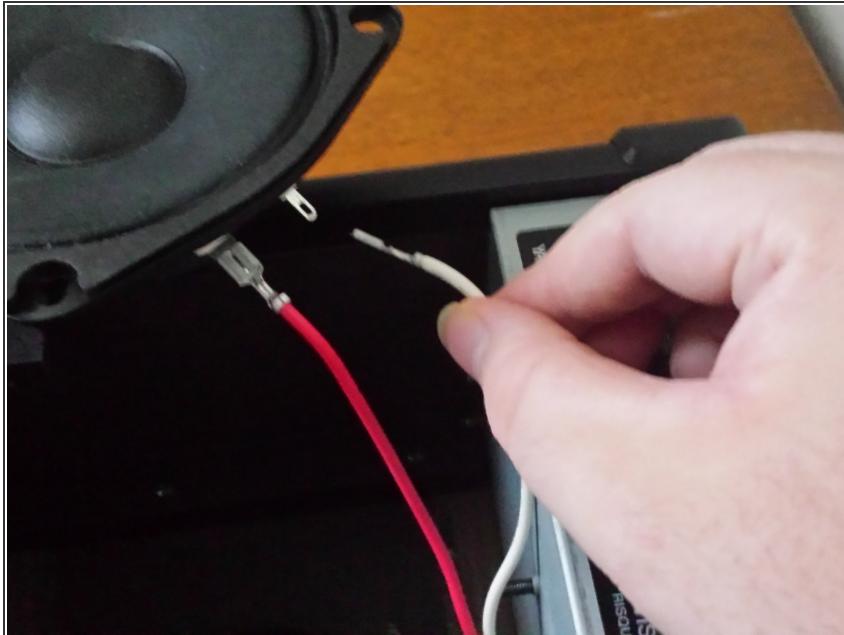

- You may now gently pull the wires out of the speaker one at a time, until both are removed.

To reassemble your device, follow these instructions in reverse order.