



Yuneec Typhoon H Gimbal Bushing Reattachment

Camera has become unattached from the main body of the drone. Having been separated at the the gimbal bushings, this often happens when the drone crashes.

Written By: Jake Breul



This document was generated on 2019-11-05 01:32:37 AM (MST).


INTRODUCTION

This guide will demonstrate how to put the camera apparatus back together on a Yuneec Typhoon H, if it has come apart.

TOOLS:

- [Toothpick](#) (1)

Step 1 — Gimbal Bushing Connectors to Camera Mount

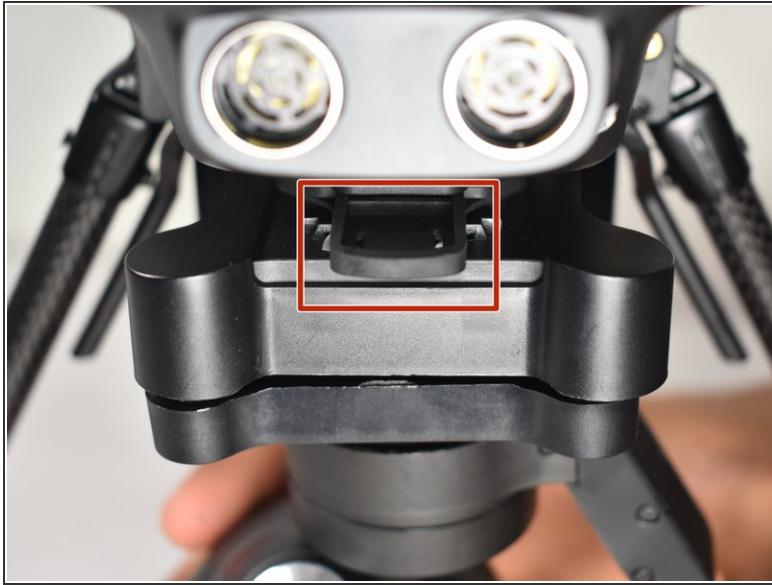

- In order to repair the camera and camera gimbal, remove the camera configuration from the body of the drone.
- Pull up on the tab connected to the camera configuration and slide the entire apparatus off.

Step 2



- Put the gimbal bushings (the rubber balls) back into the plastic alignment mounts.
- The circle that is separated from the main body of the bushing should then be inserted into the hole.

ⓘ When pushing these bushings back into place, it is smart to use a skinny tool or toothpick.

To reassemble your device, simply slide the camera mount back onto the bottom of the drone.