



# ZTE Grand X Max Plus Camera Replacement

Guide to replace the camera of the ZTE Grand X Max Plus.

Written By: Jordano Baer



## INTRODUCTION

This guide contains the steps to remove the rear camera from the ZTE Grand X Max Plus.

If your camera is scratched or not working, you can follow these steps to replace it.

### TOOLS:

- [Heat Gun](#) (1)
- [iFixit Opening Tools](#) (1)
- [Suction Handle](#) (1)
- [Phillips #00 Screwdriver](#) (1)


## Step 1 — Back Cover



**⚠ Make sure you turn off your phone before starting.**

- Heat the phone using a heating pad, heat gun, or hair dryer to loosen the glue. You just need to heat the back of the phone.
- **ⓘ You can also use a hair dryer or a heating gun for this step.**

## Step 2

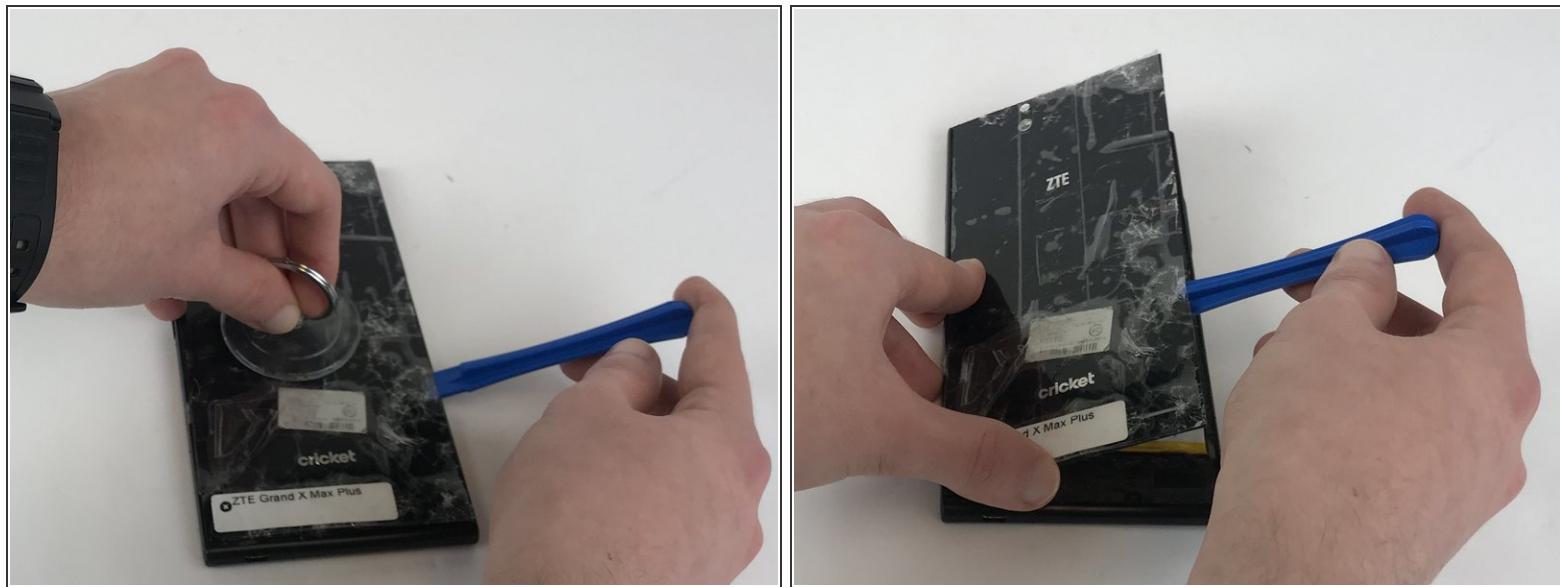

- After the phone is heated, use the blue plastic opening tool on both sides of the phone.

**⚠** Don't apply too much pressure because the cover can crack easily.

- (i)* To avoid that your cover cracks, you can add tape to back cover.
- (i)* You can use a suction cup to help remove the battery.

## Step 3



- Carefully remove the cover from the phone.

## Step 4 — Rear Camera




- Remove the screws from the upper part of the phone using a screwdriver with a JIS #000 head. There are (6) six screws that should be removed.

## Step 5




- Use a plastic opening tool to remove the plastic piece that is protecting the motherboard.

## Step 6

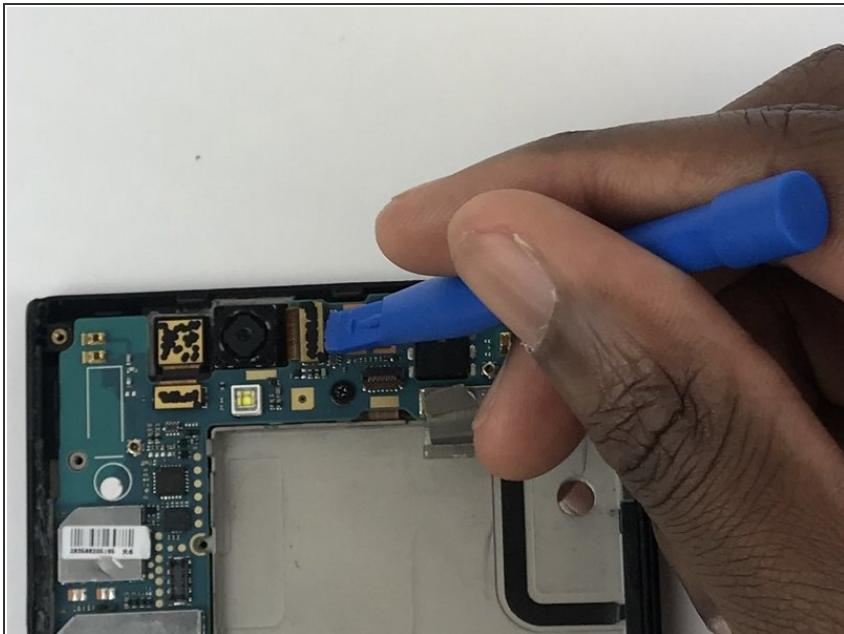

- With a plastic opening tool, unclip the camera from the motherboard.

## Step 7

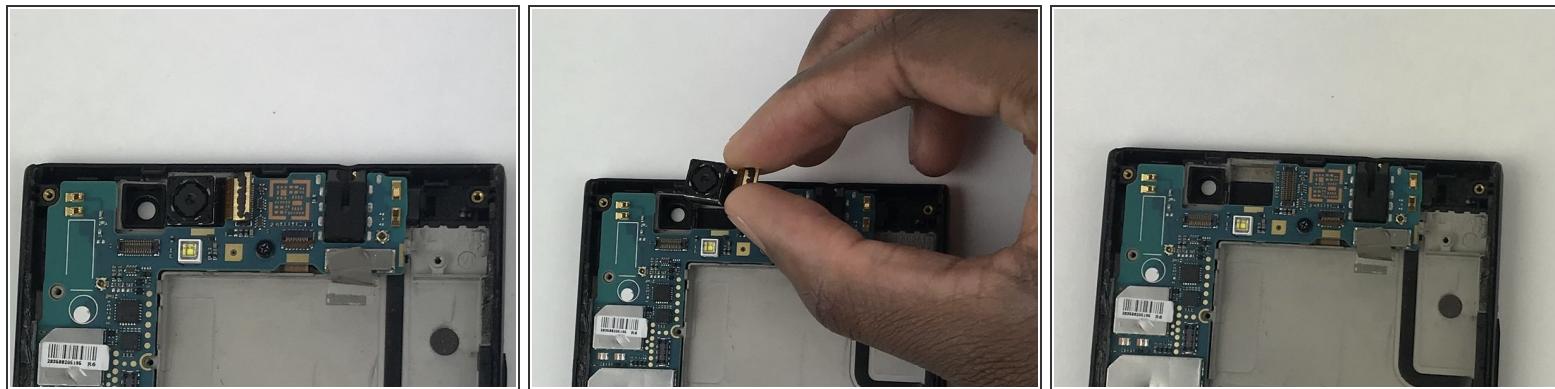

- After the camera is unclipped, remove it from the device.

To reassemble your device, follow these instructions in reverse order.