



ZTE Jasper LTE Screen Replacement

How to replace screen in an ZTE Jasper LTE.

Written By: Anthony Sou



INTRODUCTION

This guide shows you how to replace the LCD screen for the ZTE Jasper LTE phone. You might need to replace the screen if the screen is unresponsive to touch, the screen is cracked, or you have a dead screen.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)

Step 1 — Battery



- Insert the spudger into the bottom left corner of the phone.
- Use the spudger to loosen the back cover.

Step 2



- Insert the black spudger near the bottom left of the battery. There will be an opening to easily remove the battery.
- Continuing to use tool, prop up the battery and remove it.

Step 3 — Camera



- Remove nine 0.8mm Phillips #00 screws.

Step 4



- Remove the back cover by pulling upwards.
- *(i)* Removing the back cover may take a bit of force.

Step 5



- Disconnect the gold component attached to the camera by pulling upwards using the tweezers.
- Remove the camera using the tweezers by gripping tightly around the camera and pulling upwards.

i Camera is attached to the motherboard with adhesive. As such, you may need to use light force to remove the camera.

Step 6 — Screen




- Disconnect all of these parts from the motherboard.

Step 7



- Remove the 0.8mm Phillips #00 screw from the bottom right.
- Disconnect the gold pin by pulling upwards with the tweezers.

Step 8

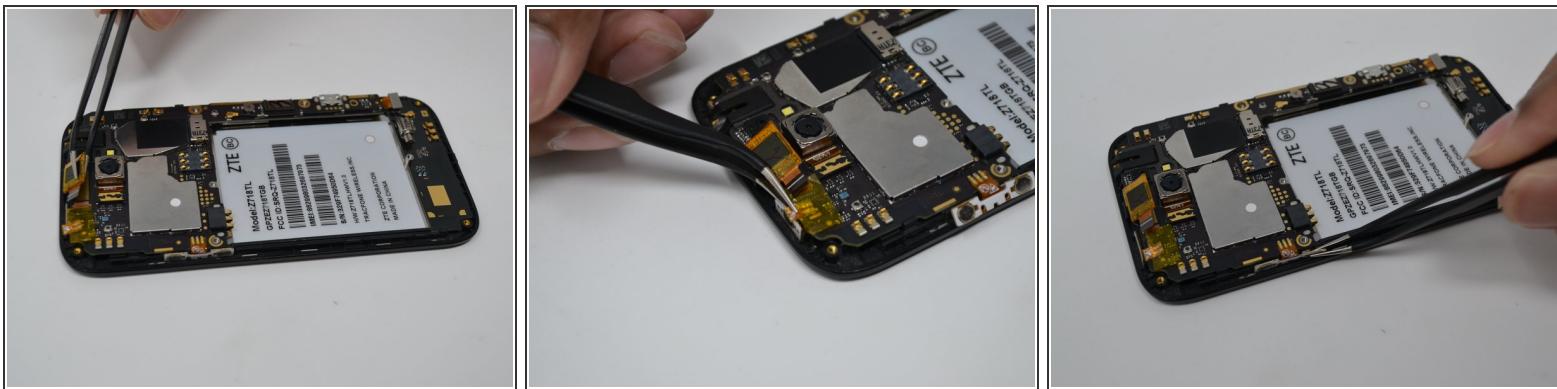

- Lightly disconnect the power button, volume button and the chip from the motherboard.

⚠ Be careful not to tear the volume and power button off the motherboard.

Step 9



- Lightly move clip back to release the motherboard.
- Gently pull the motherboard away from the screen.

To reassemble your device, follow these instructions in reverse order.