




Zebra ZP 505 Peel and Present System Replacement

Follow the steps of this guide to replace the ZP 505's peel and present system.

Written By: Brian Jagger

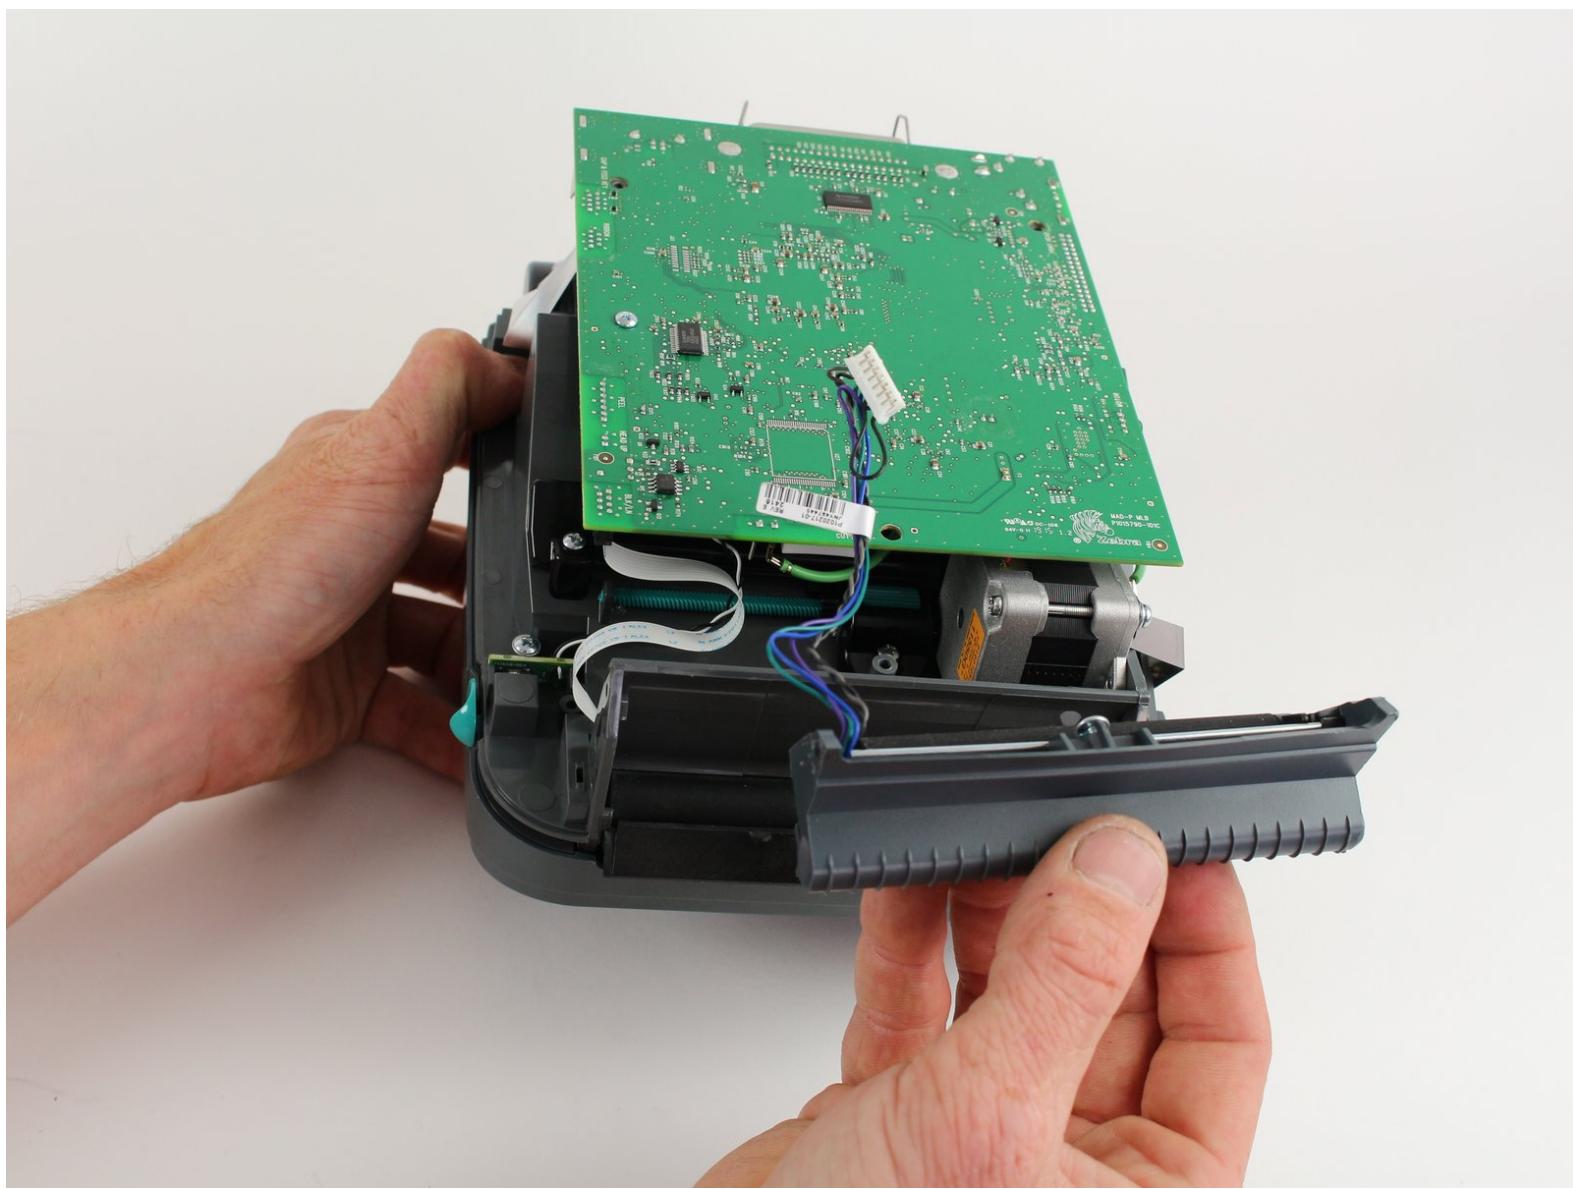

INTRODUCTION

Use the guide to safely replace the peel and present system with the help of a phillips head screwdriver set.

TOOLS:

- Phillips #0 Screwdriver (1)
- Phillips #1 Screwdriver (1)
- Metal Spudger (1)

Step 1 — Peel and Present System



- Orient the printer so that the bottom is facing up.
- Remove the three P1 9mm screws located on the bottom of the printer and remove the lower unit.

Step 2



- Remove the P0 9mm screw.
- Proceed to remove the cover.


This document was generated on 2019-10-05 11:09:56 PM (MST).

Step 3




- Disconnect the harness.
- Thread the harness through the hole on the right hand side.

Step 4

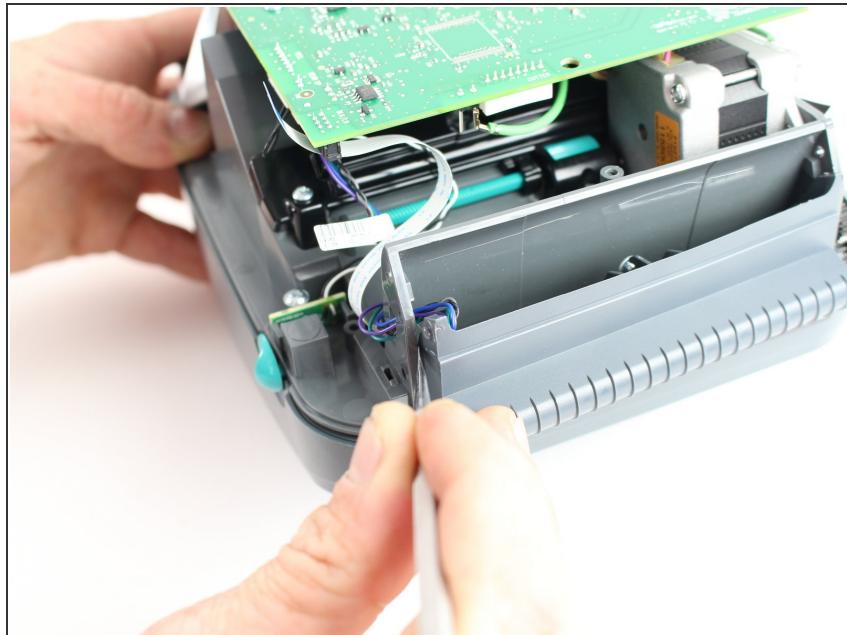

- Remove the peel and present system by utilizing a metal spudger.

Step 5

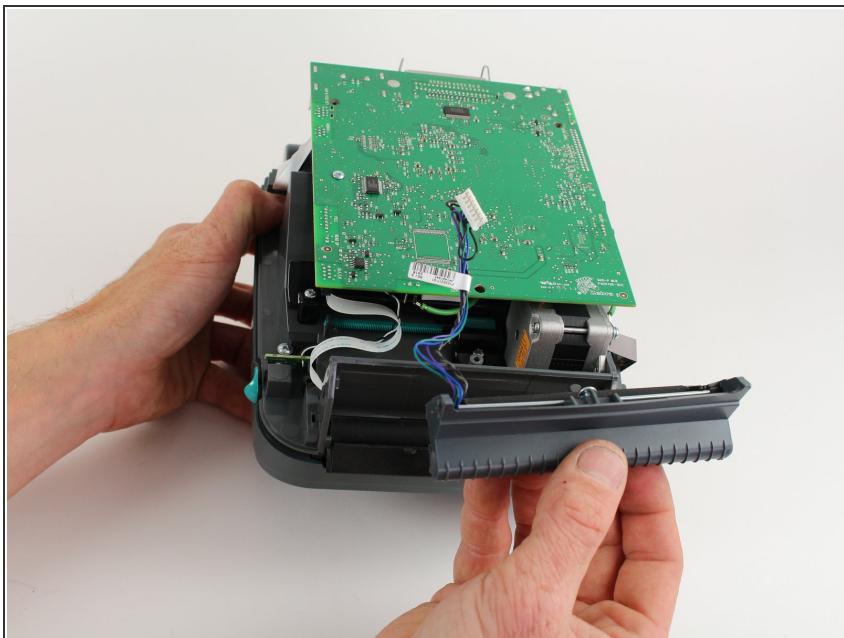

- Remove the peel and present system.

To reassemble your device, follow these instructions in reverse order.