



Zeki Droid Tablet Back Casing Replacement

This guide will aid in the replacement of the back casing.

Written By: Wyatt Nelson



INTRODUCTION

This guide will begin with the disassembly of the tablet. Throughout the replacement process be cautious in order to not break any pieces on the device. The replacement should only take about ten to fifteen minutes.

TOOLS:


- **Tweezers** (1)
- **Spudger** (1)
- **iFixit Opening Tools** (1)

Step 1 — Back Casing




- Remove the back casing by slowly popping each tab out with a plastic opening tool.

Step 2

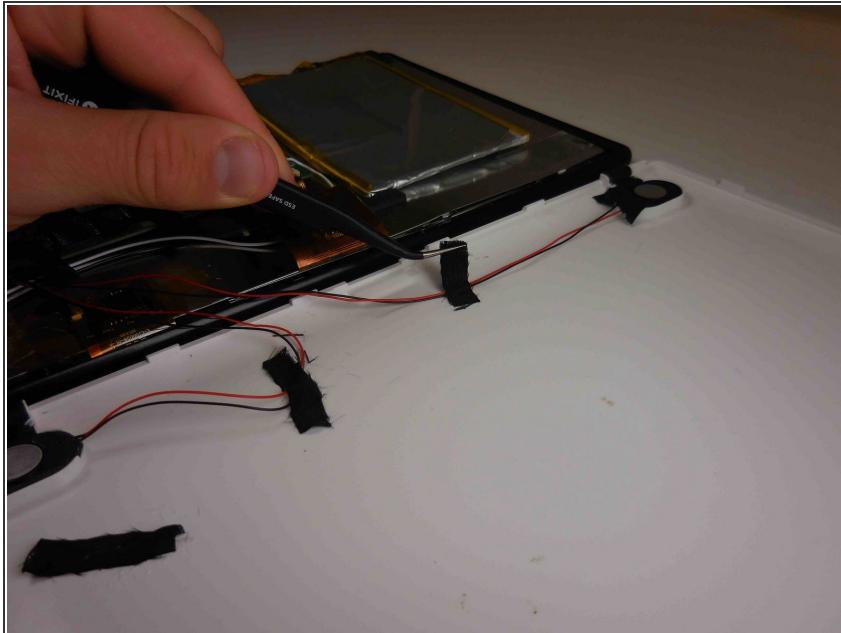

- Carefully remove the tapes one by one from the connecting wires with tweezers.


Step 3

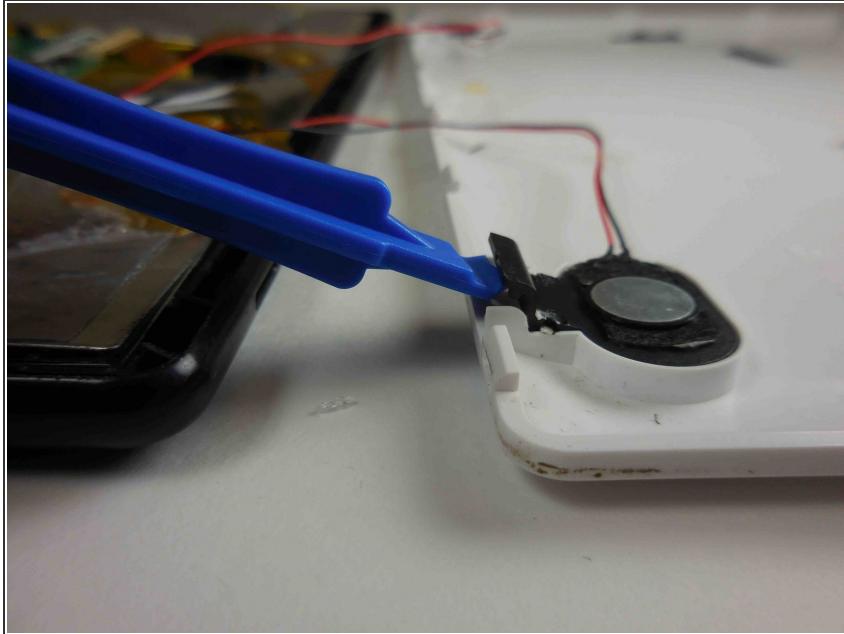

- Carefully remove the black clips from both sides of the casing with a plastic opening tool.

i The clips should pop off separate from the speakers.


Step 4

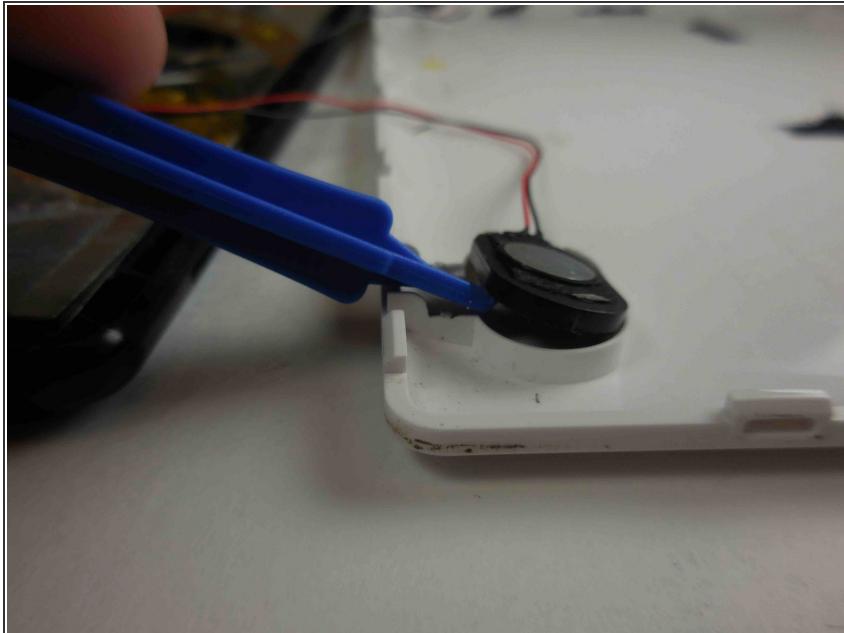

- Carefully remove the speakers from the casing.

⚠ Do not tug on the speakers because they are connected to fragile wires.

Step 5

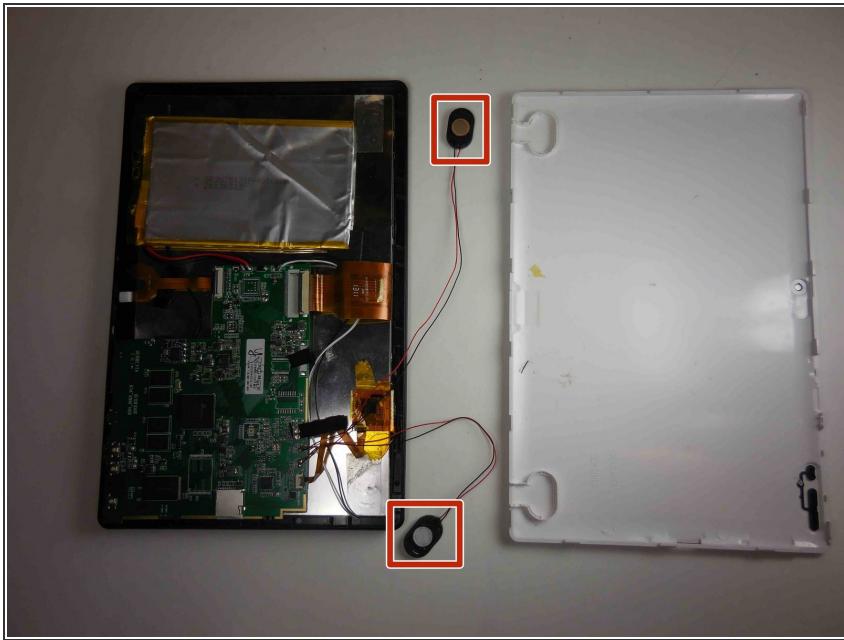

- Carefully pull the speakers away from the back casing.

To reassemble your device, follow these instructions in reverse order.