




# Zeki Droid Tablet Camera Replacement

This guide will help you to disassemble your tablet and replace your cameras. This procedure should take no more than twenty minutes to complete. The process will include using tools such as spudgers, and tweezers.

Written By: Colleen McFadden

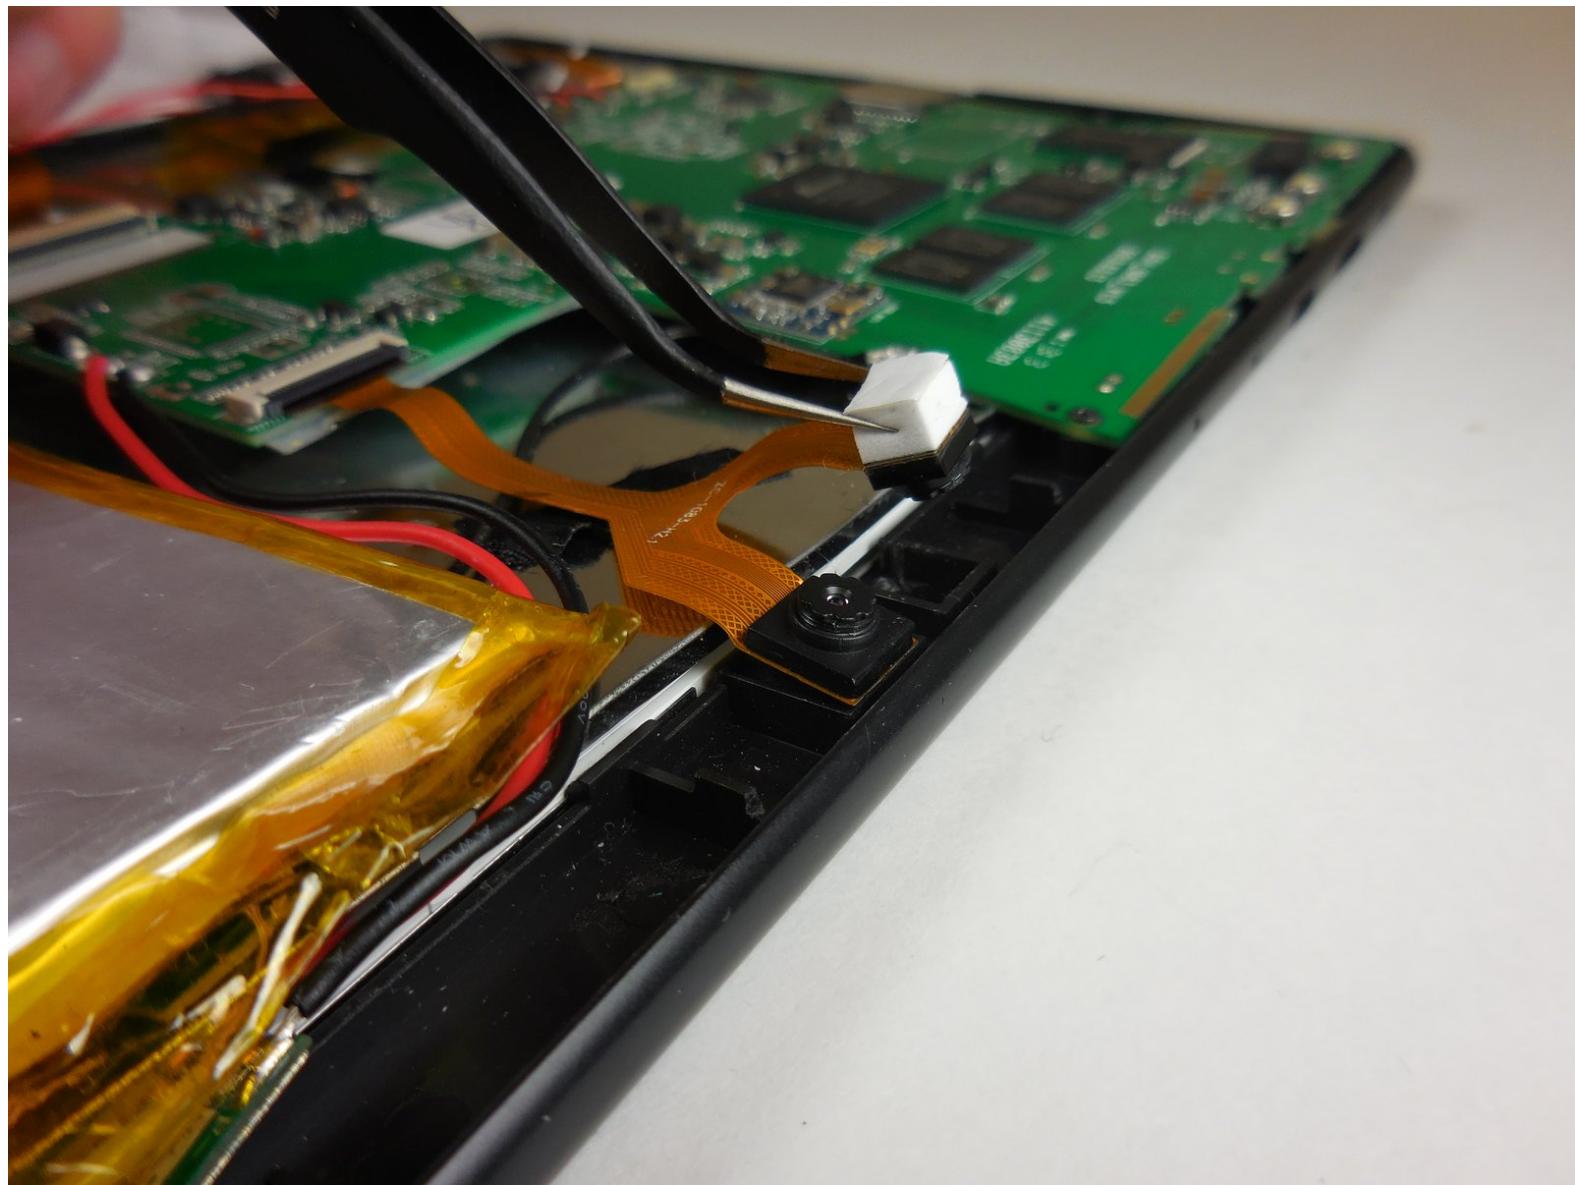

# INTRODUCTION

Replacing the cameras that may be cracked or faulty on your Zeki Droid Tablet.

## TOOLS:


- Spudger (1)
- [iFixit Opening Tools](#) (1)
- Tweezers (1)

## Step 1 — Back Casing




- Remove the back casing by slowly popping each tab out with a plastic opening tool.

## Step 2

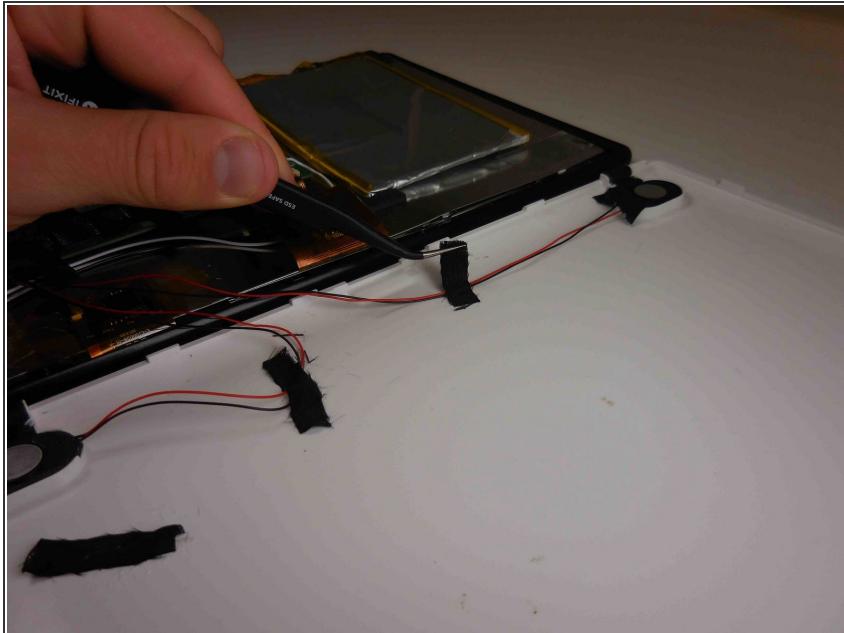

- Carefully remove the tapes one by one from the connecting wires with tweezers.


## Step 3

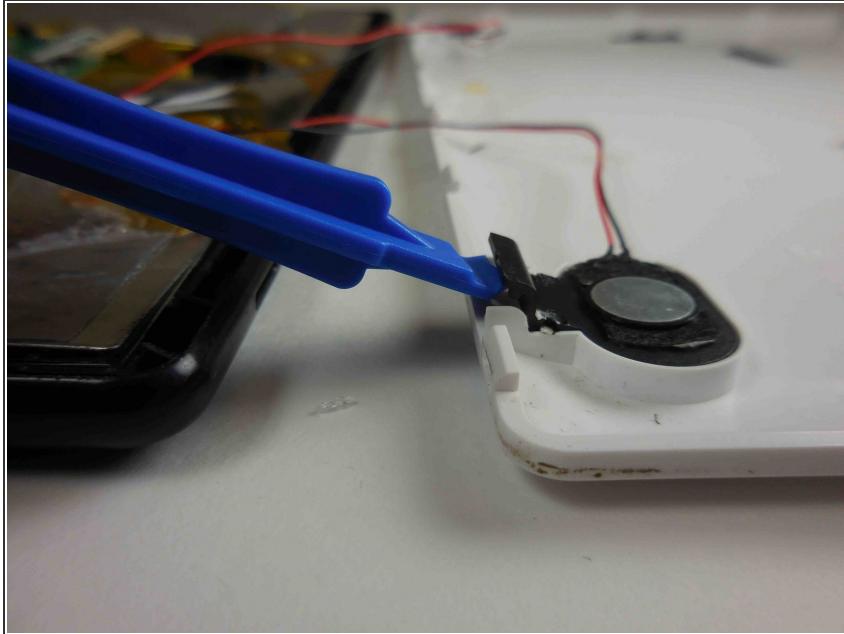

- Carefully remove the black clips from both sides of the casing with a plastic opening tool.

**i** The clips should pop off separate from the speakers.


## Step 4

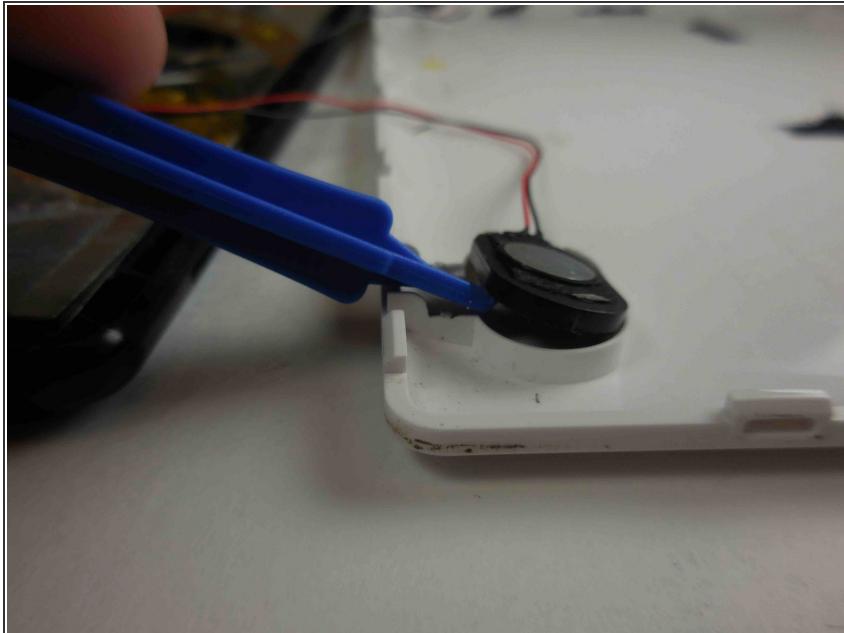

- Carefully remove the speakers from the casing.


**!** Do not tug on the speakers because they are connected to fragile wires.

## Step 5

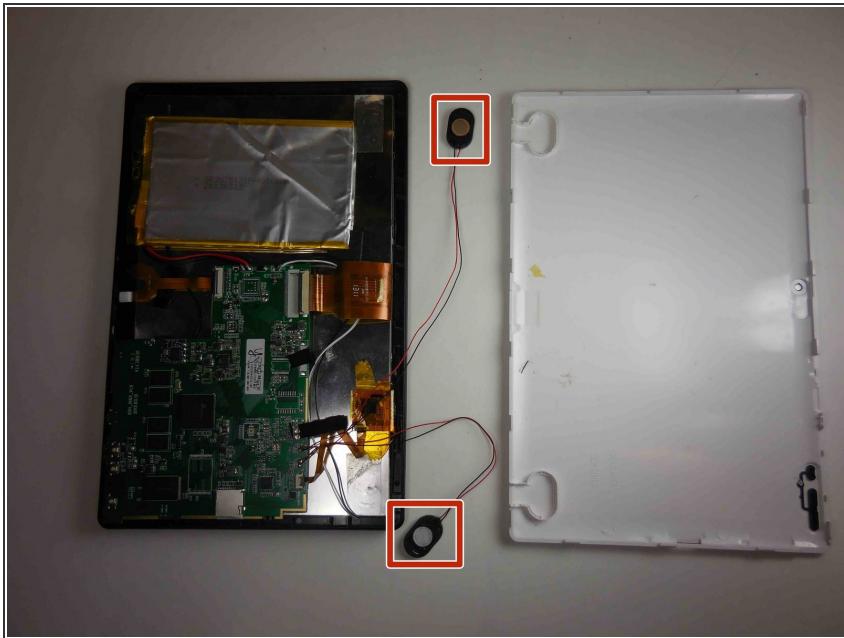


- Carefully pull the speakers away from the back casing.

## Step 6 — Camera

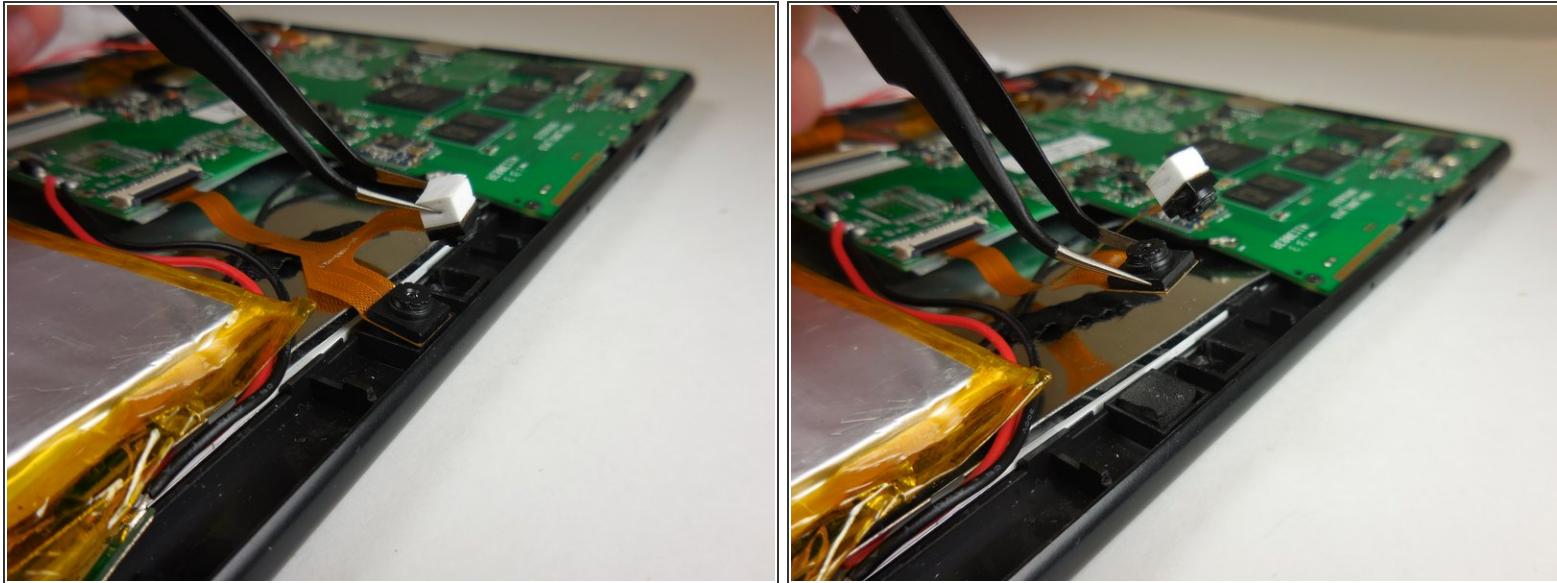

- To remove the cameras you will first want to use tweezers to carefully unstick the cameras one by one from the tablet.
- If you cannot get the tweezers to grip the cameras, using your fingers works as well.

## Step 7

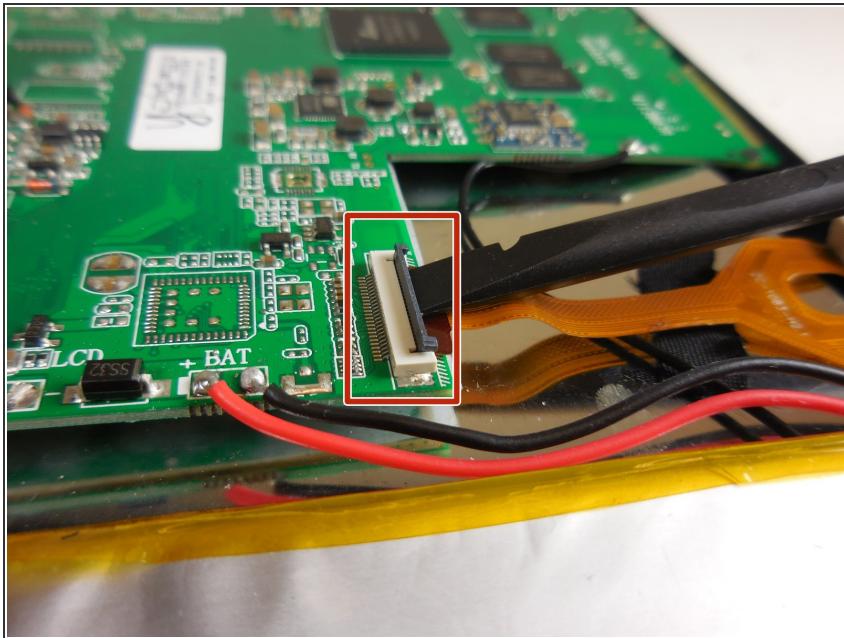

- Next, undo the ZIF connector with a plastic spudger, or fingernail, that is connecting the cameras to the motherboard.
- <http://edu.dozuki.com/Guide/Recognizing+...> Use this link to help you disconnect the ZIF connector

**⚠** Do not yank the ZIF connector. It should come apart very easily with little force needed.

## Step 8



- Gently pull the copper connection away from the motherboard of the tablet to completely remove the camera.

To reassemble your device, follow these instructions in reverse order.