




Zeki Droid Tablet Front Screen Replacement

This guide will help you to fix a crack screen so you can see your homepage and apps clearly.

Written By: Kyla

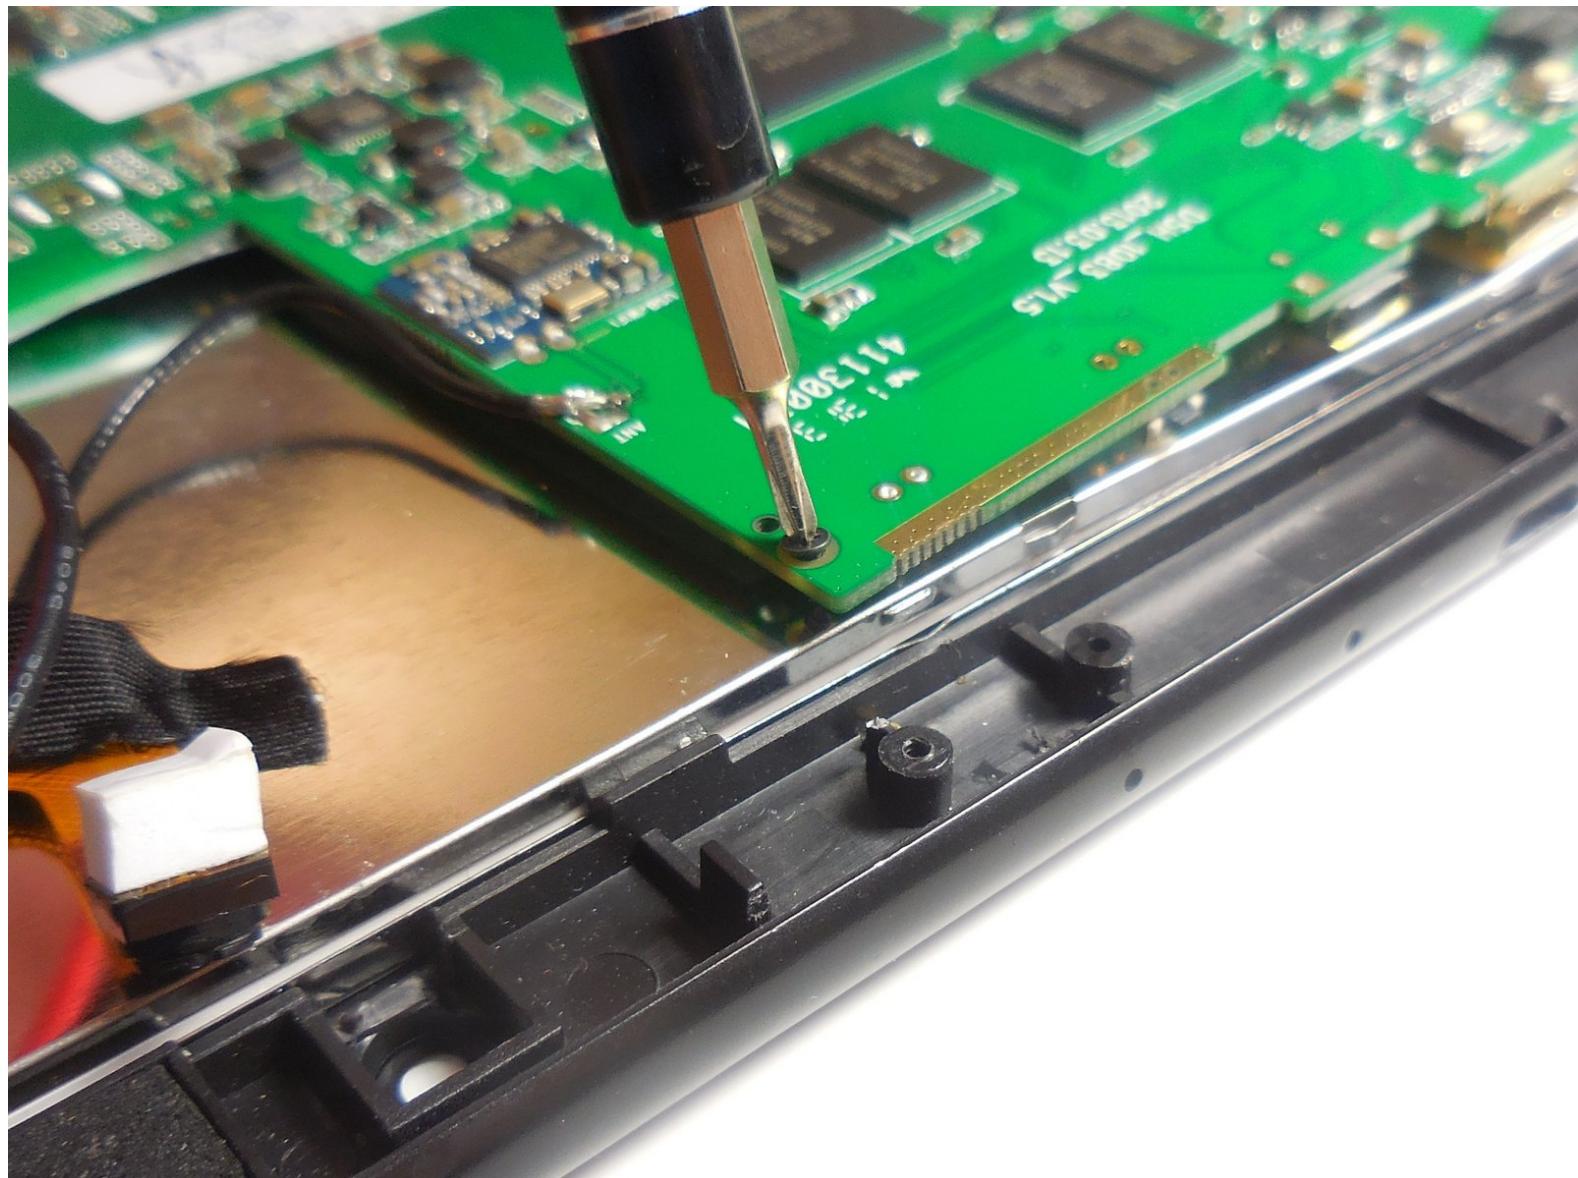

INTRODUCTION

In this guide we will be taking the components apart to reach the screen. When working with the screen be careful for broken glass.

TOOLS:


- [Tweezers](#) (1)
- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)
- [Phillips #000 Screwdriver](#) (1)

Step 1 — Back Casing




- Remove the back casing by slowly popping each tab out with a plastic opening tool.

Step 2

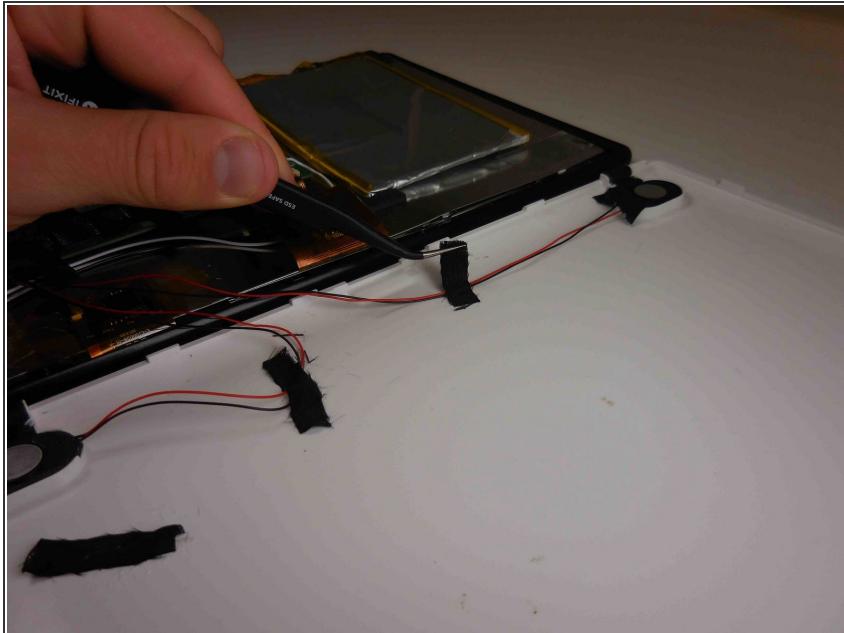

- Carefully remove the tapes one by one from the connecting wires with tweezers.


Step 3

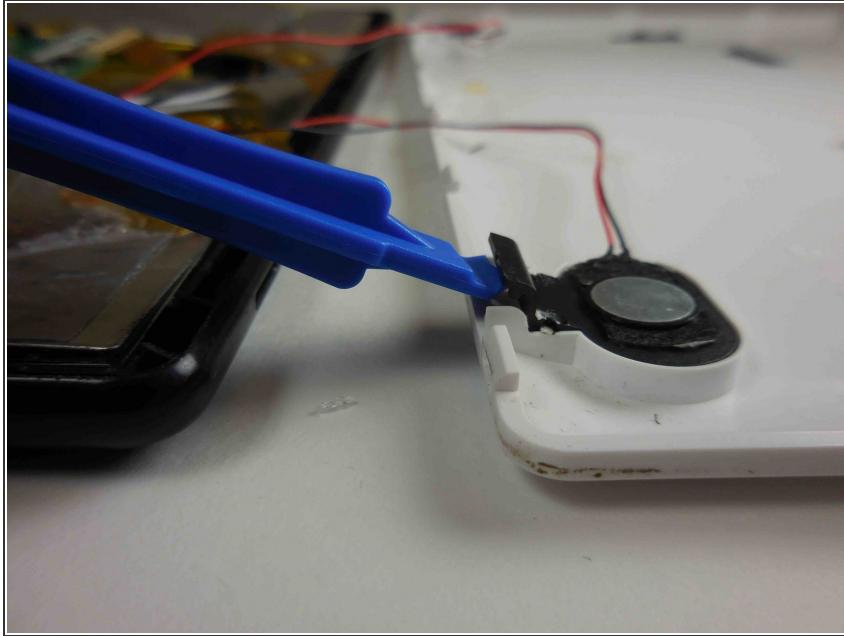

- Carefully remove the black clips from both sides of the casing with a plastic opening tool.

i The clips should pop off separate from the speakers.


Step 4

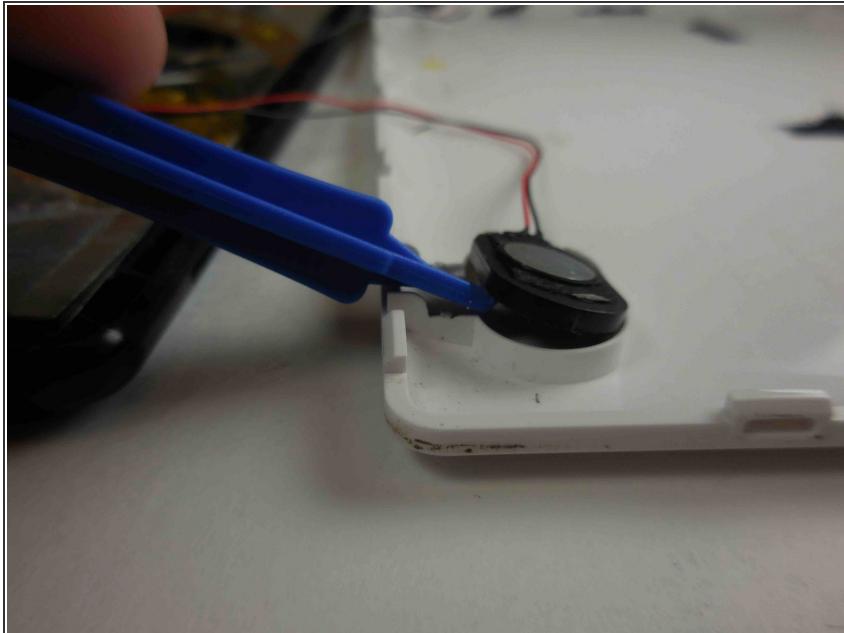

- Carefully remove the speakers from the casing.


! Do not tug on the speakers because they are connected to fragile wires.

Step 5

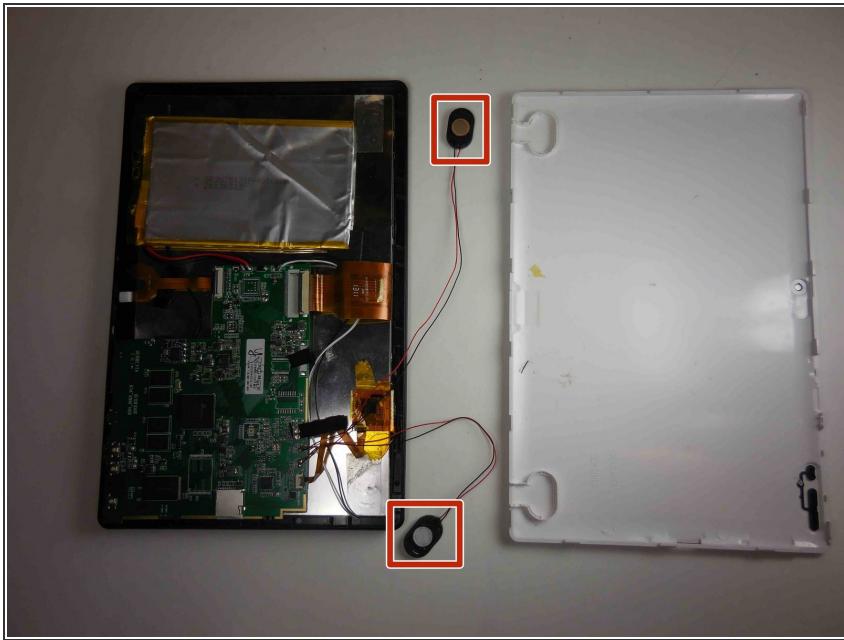


- Carefully pull the speakers away from the back casing.

Step 6 — Front Screen

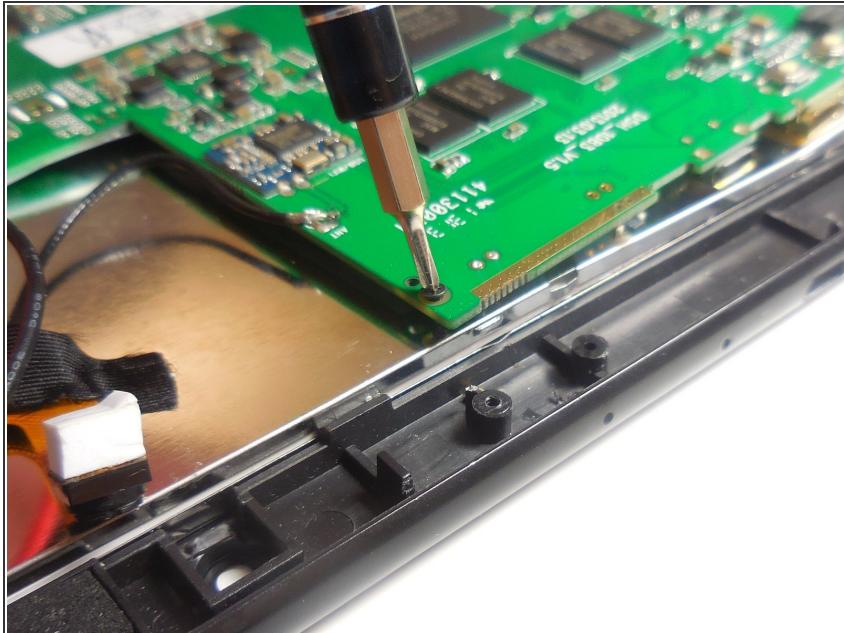


- Unscrew all four screws around the mother board, this unattaches the board from the framing.

Step 7

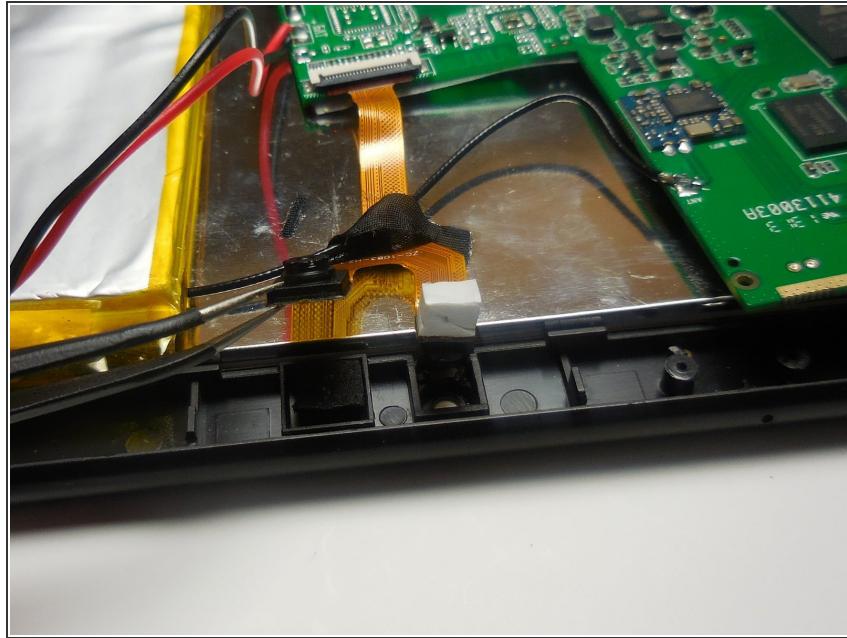

- With tweezers, lift the camera and flash component from their fittings.


Step 8

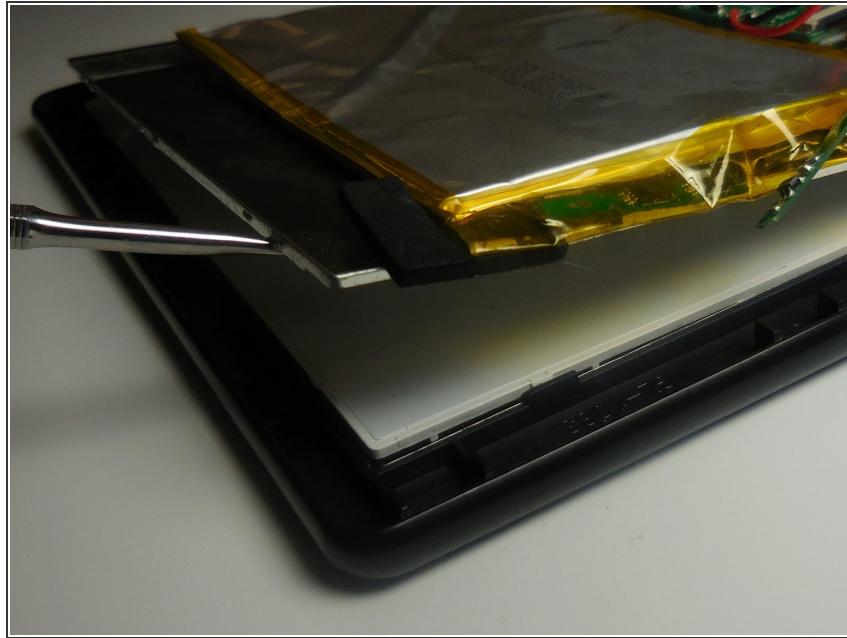

- Slowly lift the metal framing to reach the components at the front of the device.

⚠ Do not pull the framing completely off. There is a zift connecter that hold it in place at one end.

Step 9

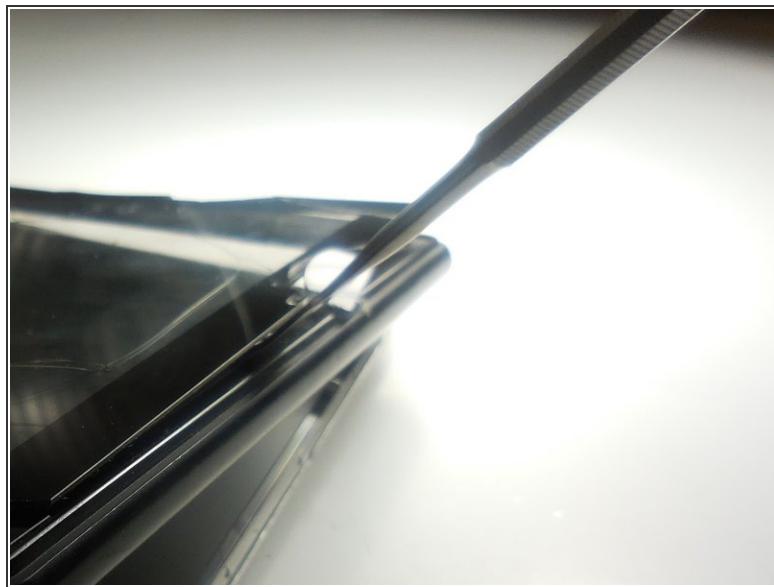

- Pop out the screen pushing it forward.

To reassemble your device, follow these instructions in reverse order.