



dreamGEAR Quad Dock Pro Mother Board Replacement

Remove the mother board from the Quad Dock Pro

Written By: Jacob



INTRODUCTION

The motherboard is the heart and soul of any electronic device. Learn how to replace it!

TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Prerequisite Guide to Accessing Interior




- Remove the rubber foot pads on the bottom of the device using a plastic opening tool.

Step 2





- Remove the six 2 mm PH0 screws on the bottom of the device.
- Four of those screws are located under the foot pads.

Step 3

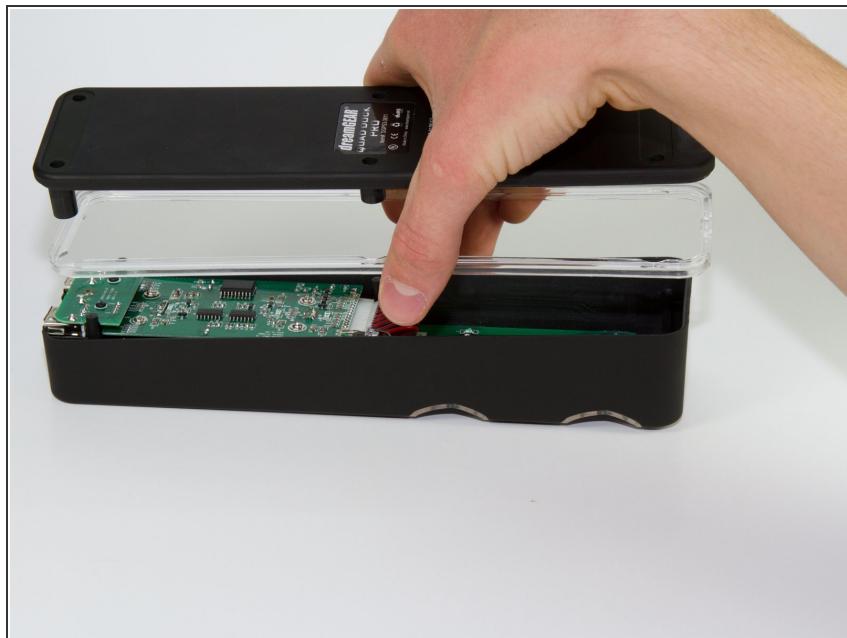

- Gently remove the bottom of the device.

Step 4 — Mother Board

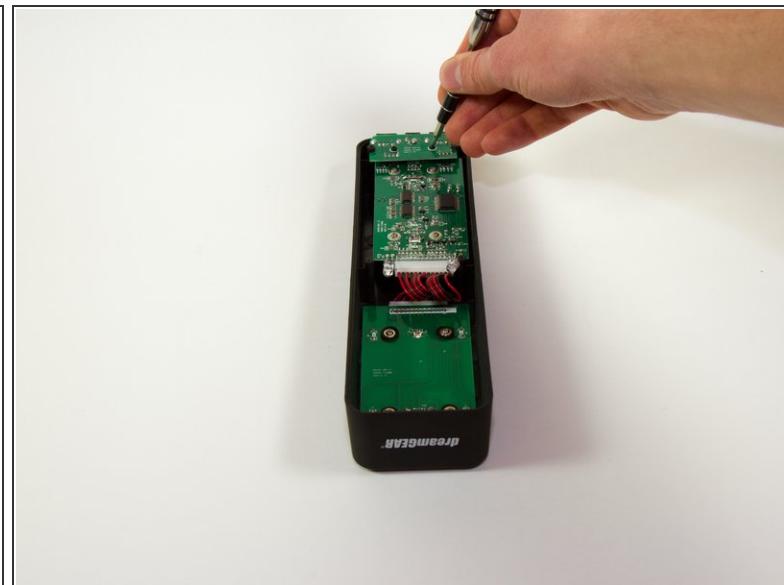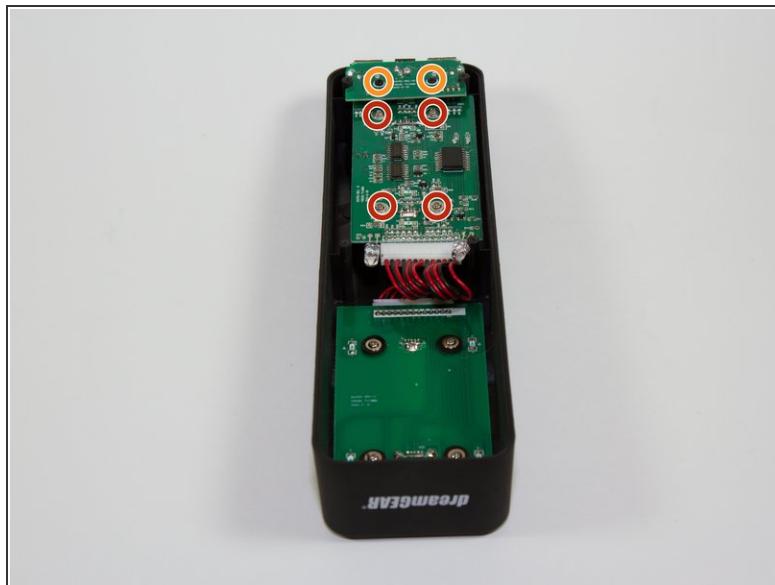


- Remove the six screws holding the motherboard in. Two are 2mm PH0 screws (circled in orange), four are 1.8 mm J1 screws (circled in red).

Step 5



- Gently pick up the mother board
- ⚠ Pick the mother board straight up or you may risk damaging the mini-USB charging ports.

Step 6

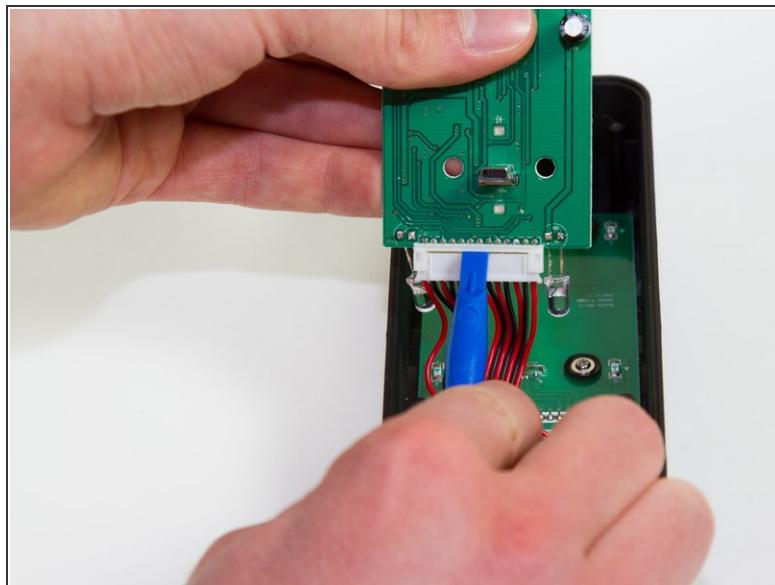

- Use a plastic opening tool or similar tool to gently pry the power ribbon cord out of its port.

To reassemble your device, follow these instructions in reverse order.