




# iBook G3 12" Airport Replacement

Written By: iRobot

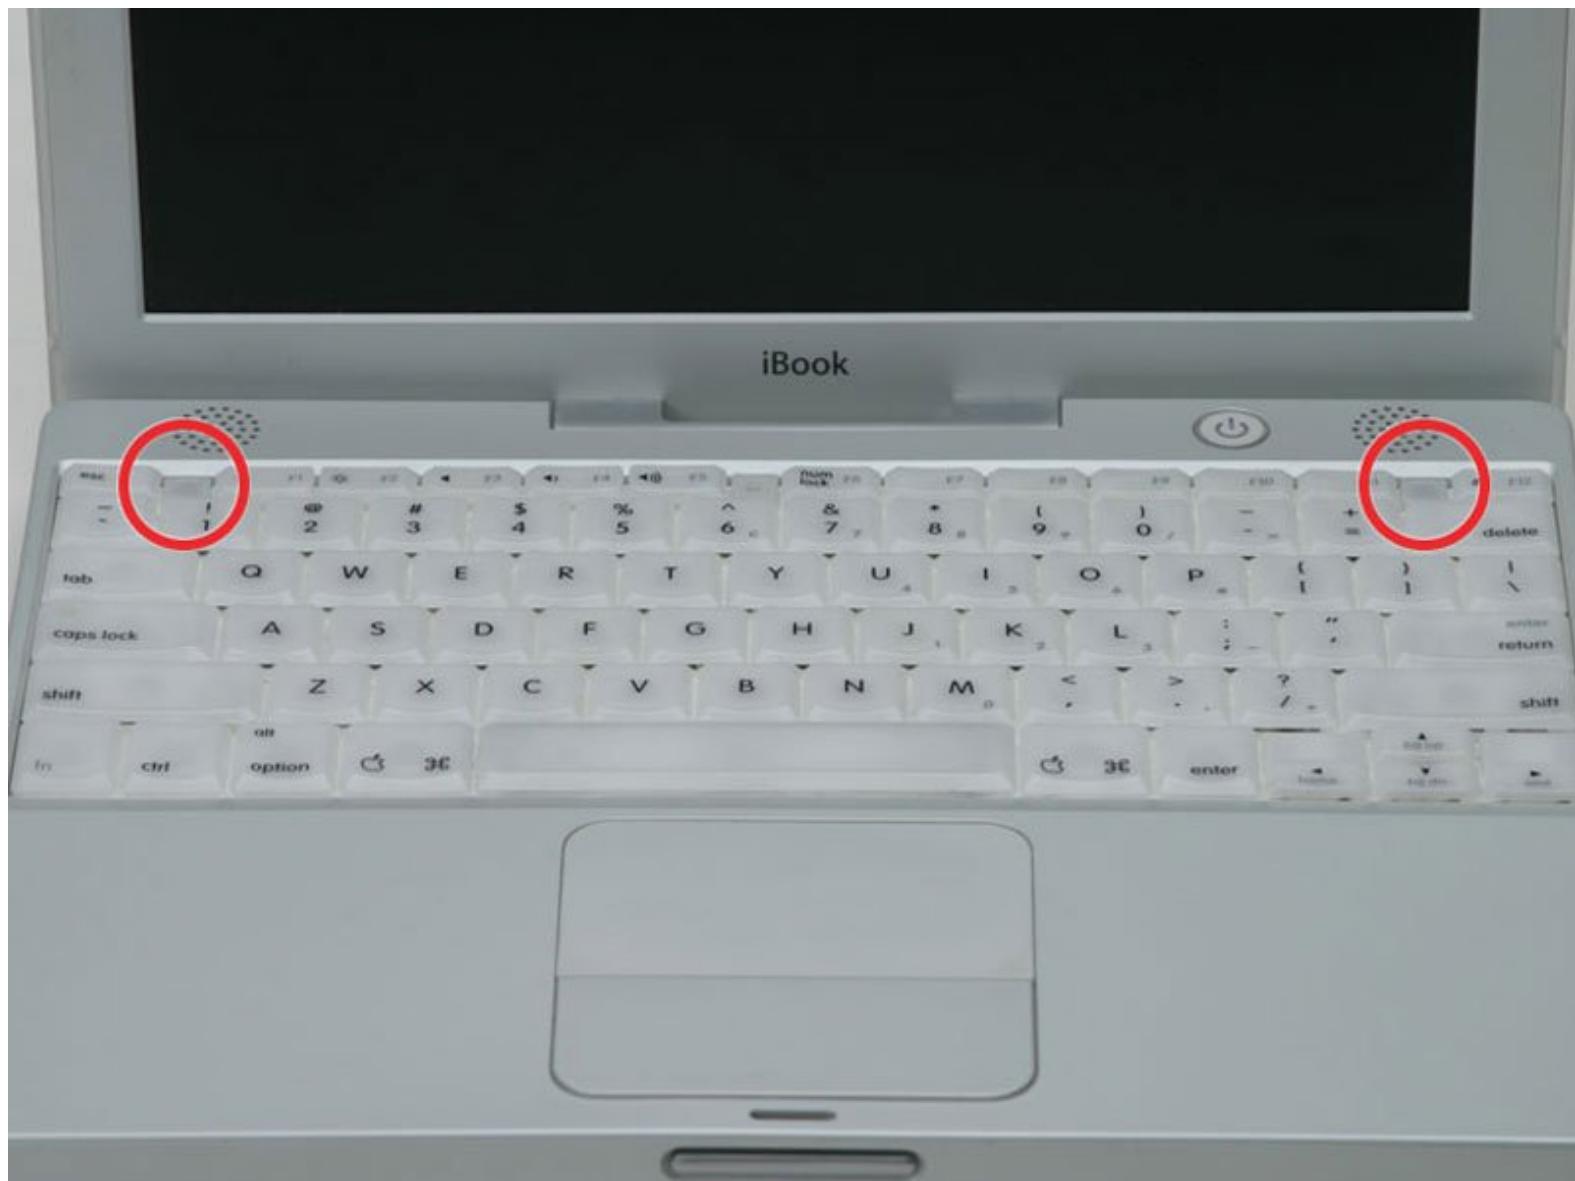

# INTRODUCTION

Install an original Airport 802.11b card internally.

## TOOLS:

- Coin (1)
- Flathead 3/32" or 2.5 mm Screwdriver (1)

## PARTS:

- Airport Card (1)

## Step 1 — Battery




- Use a coin to rotate the battery locking screw 90 degrees clockwise.
- Lift the battery out of the computer.

## Step 2 — Airport




- Pull the keyboard release tabs toward you and lift up on the keyboard until it pops free.
- If the keyboard does not come free, use a small flathead screwdriver to turn the keyboard locking screw 180 degrees in either direction and try again.
- Flip the keyboard over, away from the screen, and rest it face-down on the trackpad area.

## Step 3

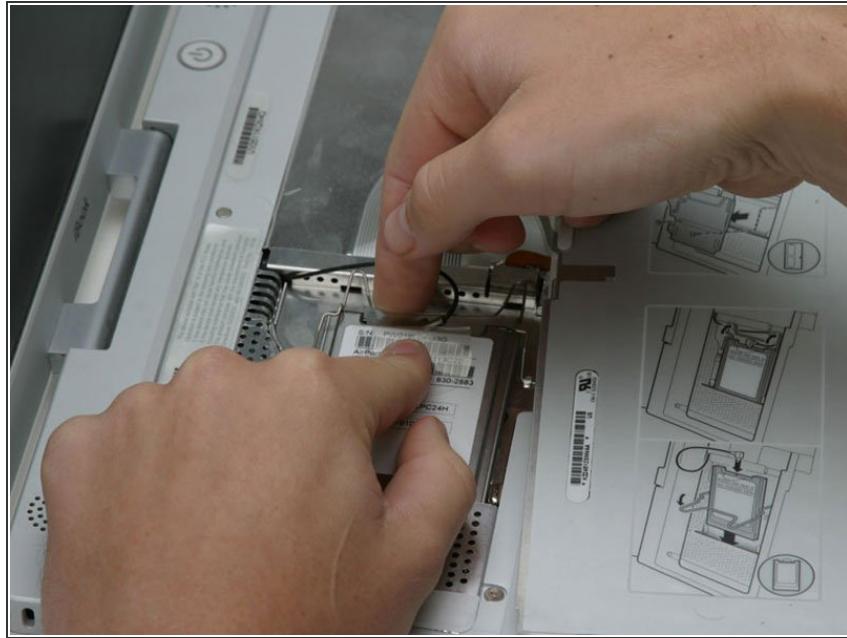

- Push the wire clasp toward the Airport card and pull it up to free it from the RAM shield.

## Step 4

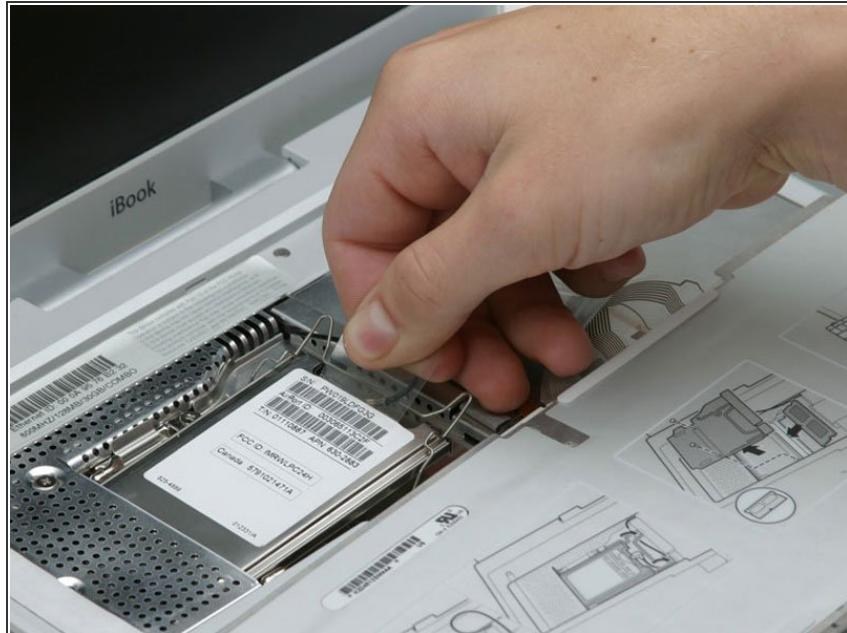

- Grasp the clear plastic tab on the Airport card and pull toward the right.

## Step 5



- Hold the Airport card in one hand and use your other hand to remove the antenna cable.

To reassemble your device, follow these instructions in reverse order.