



iFixit Side Stack Retail Display Assembly

Written By: Eric Essen



Step 1 — Empty Box Components



- Box should include:
 - Set of screws/.driver
 - Metal rods
 - Honeycomb Base/Feet
 - Main stand (back/sides)
 - Two large, one small foldable shelf insert
 - Two large, one small black rectangular insert
 - "You can fix it" panel and iFixit topper (not pictured)

Step 2 — Build Honeycomb Base



- The three angled supports fit into the two rectangular supports.
- Place the fully constructed honeycomb base into the display.

Step 3 — "You can fix it"



- Fit "You can fix it" panel over front of honeycomb base
- "You can fix it" panel sides fit INSIDE of base walls
- Use screws to fasten

Step 4 — Build Shelf Insert



- Build bottom shelf, using one of two larger foldable shelves
- Tabs fit together, fit side tabs along back, then fold over and secure

Step 5 — Install Metal Supports




- Install two metal support for middle shelf
- Metal rods fit into provided holes

Step 6 — Insert Bottom Shelf



- Fit bottom shelf into bottom shelf slots cut into back of display
 - Tabs go out the back and then back in towards the front
- Lay black shelf insert into shelf
- Fit screws together to hold shelf in place
- Repeat for middle and top shelves
 - Top shelf and insert are smaller than bottom and middle shelves

Step 7 — Fold Sides into Honeycomb Base

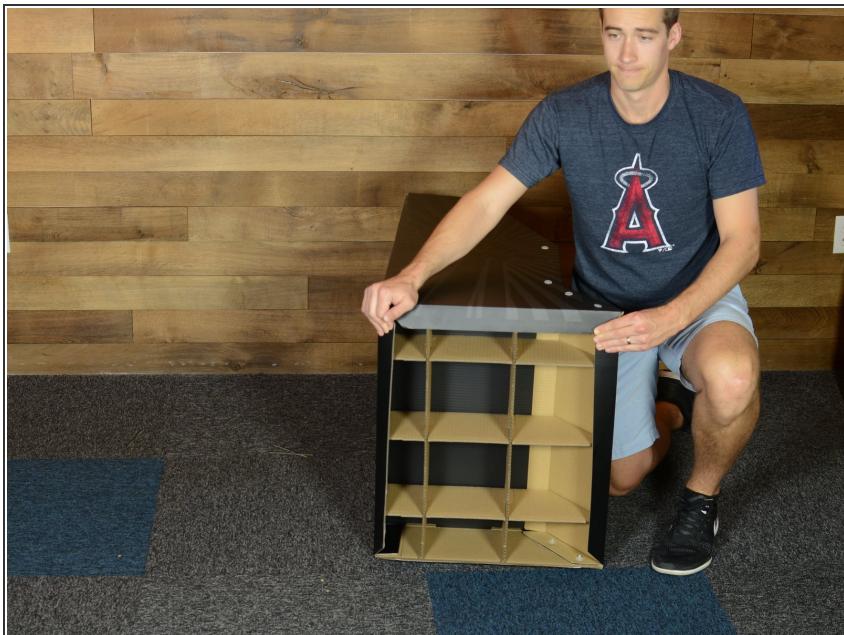

- Like so.
- (Go Angels!)

Step 8 — iFixit Header Sign



- Fold top section down to make holes match
- Align iFixit sign and install using screws

To reassemble your device, follow these instructions in reverse order.