



iHome iH27B iPod Adapter Replacement

Follow this guide if the iPod adapter on your iHome iH27B is physically broken and needs to be replaced.

Written By: John Kraemer



INTRODUCTION

You will be removing screws and pulling out your broken adapter in order to replace it with a new adapter.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

PARTS:

- [iPod Adapter](#) (1)

Step 1 — iPod Adapter



- Set the device with the adapter facing up.
- Remove the following screws:
 - Two 10 mm Phillips #0

Step 2



- Grip the plastic adapter case and pull upwards with a medium amount of force. You will have to twist forward a little so that the connections are visible.


The adapter will still be connected with wires, so make sure not to pull too hard.

Step 3



- Remove the following screws:
 - Four 7 mm Phillips #0
- Lift out the two black plastic pieces that have come loose on either side of the circuit board, and set them aside.

Step 4

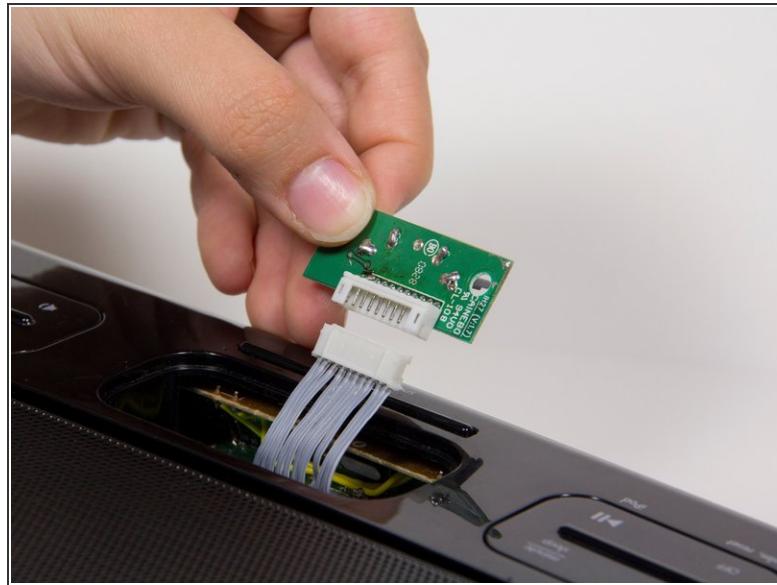


- Carefully pry apart the bundle of white wires connected at the junction with the plastic opening tool.

⚠ Do this slowly. Be careful not to damage the wires

- Lift out the circuit board that has become loose.

Step 5

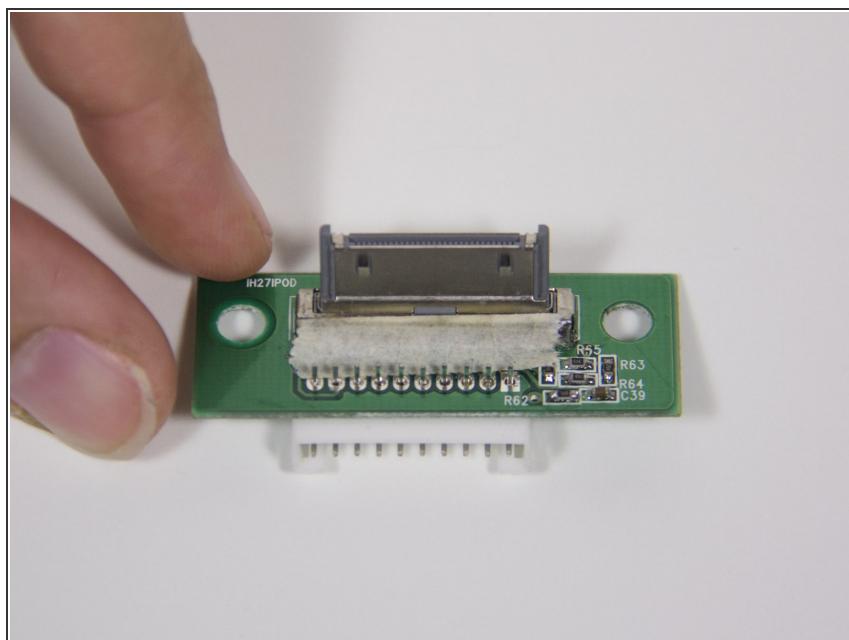

- Pull out the adapter, and replace it with the new one.

To reassemble your device, follow these instructions in reverse order.