



iMac Intel 27" EMC 2546 Hard Drive

prerequisite guide, hard drive removal

Written By: Andrew Optimus Goldheart




INTRODUCTION

prerequisite guide, hard drive removal

TOOLS:

- [T10 Torx Screwdriver \(1\)](#)
- [T8 Torx Screwdriver \(1\)](#)

Step 1 — Hard Drive

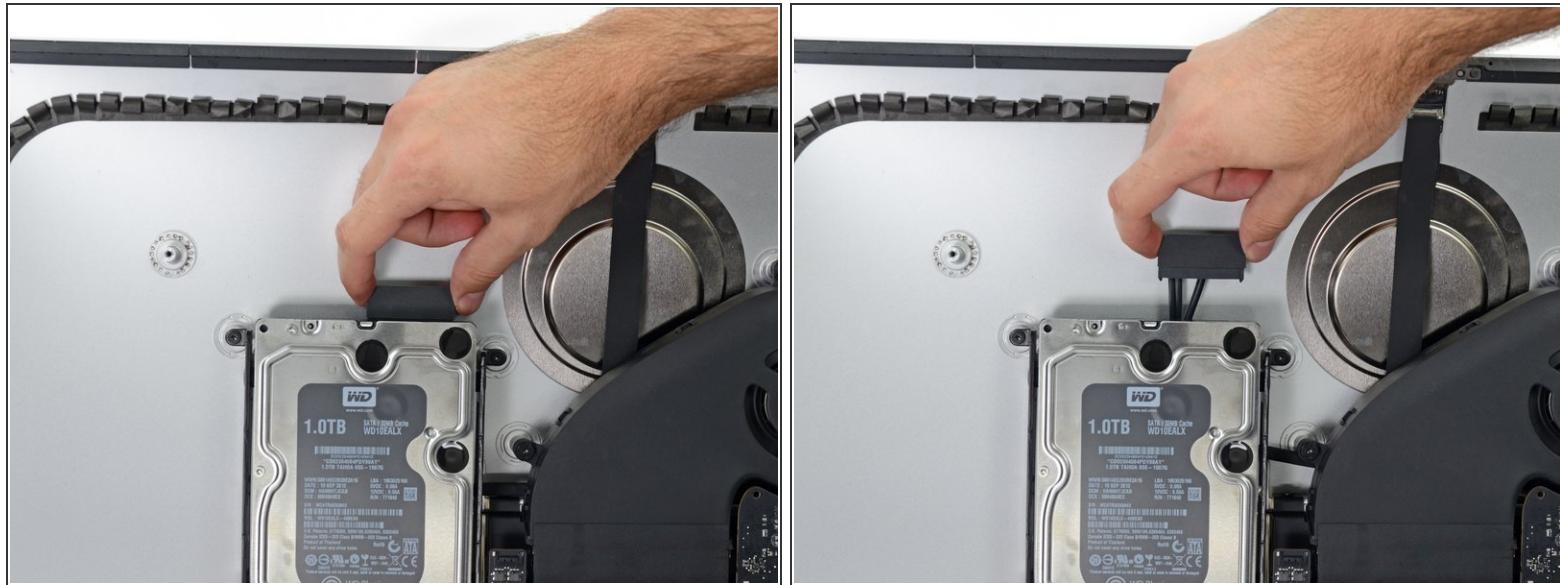

- Pull straight up on the SATA data/power cable to disconnect it from the drive.

Step 2



- Remove two 7.3 mm T10 screws securing the left hard drive bracket to the rear case.

Step 3



- Grab the hard drive and left hard drive bracket together.
- Tilt the left side up away from the rear case, and slide the assembly to the left.
- Remove the hard drive and left hard drive bracket from the iMac.

Step 4



- Remove the left hard drive bracket.

To reassemble your device, follow these instructions in reverse and use our [Adhesive Strips Guide](#) to reattach the display glass.