



iPad Display Assembly 3 Pc. Adhesive Application

Apply display assembly adhesive to properly seal your iPad after repair.

Written By: Arthur Shi



INTRODUCTION

This guide shows how to apply display assembly adhesive to an opened iPad.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)

Step 1 — iPad Display Assembly 3 Pc. Adhesive Application



- Before installing new adhesive, thoroughly clean the display assembly and the frame of all residue.
- Use tweezers to pull up sections of tape residue.
- Use an opening tool or a spudger to scrape residue off. You can use high concentration (over 90%) isopropyl alcohol to soften the adhesive.
- Remove the residue by wiping in one direction to prevent smearing.


⚠ Do not scrape with a metal tool, or you will scratch the display assembly's surface.

Step 2




- Lay out the replacement adhesive strips around the display assembly so that they correspond to the correct sides.

Step 3

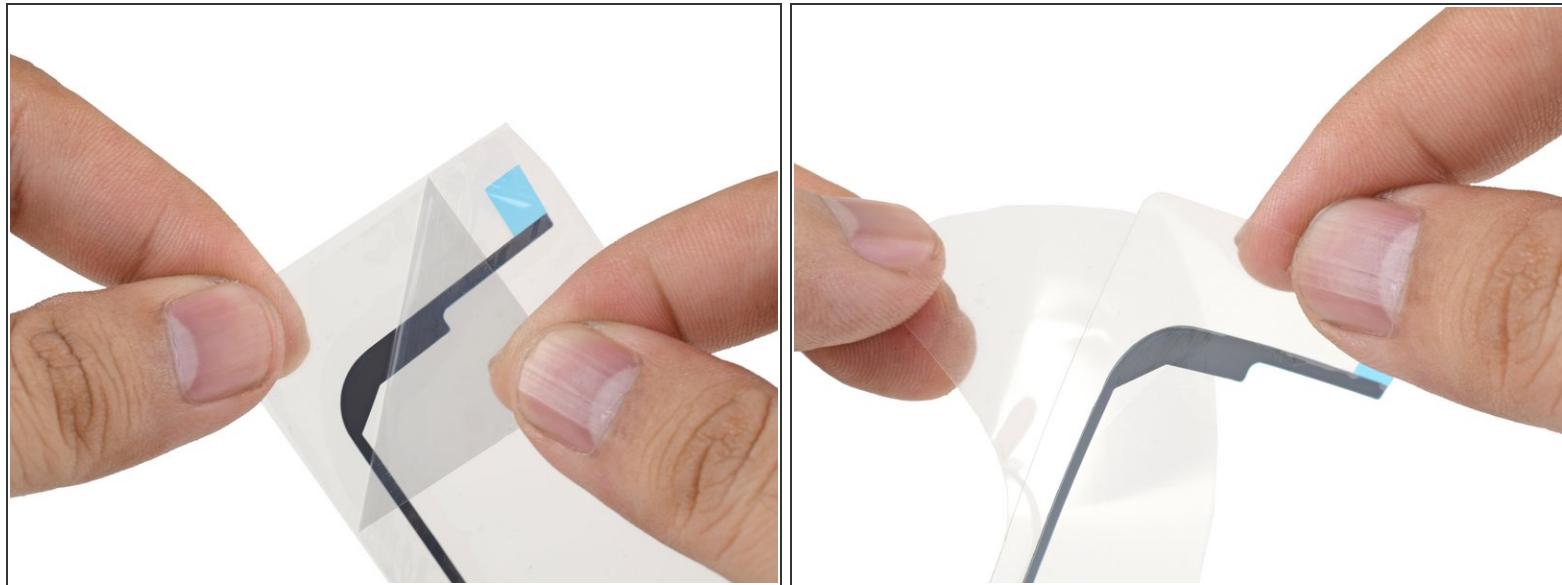

- ① Each adhesive strip is encased in four layers of plastic—three on top and one on the bottom.
 - Peel and remove the topmost plastic cling layer from the left adhesive strip.
 - Peel and remove the bottom plastic liner from the strip.
- ② The top of the adhesive strip should still be covered by a colored plastic layer as well as a clear plastic stiffening layer.
- ③ The bottom of the adhesive strip should now be exposed and sticky.

Step 4

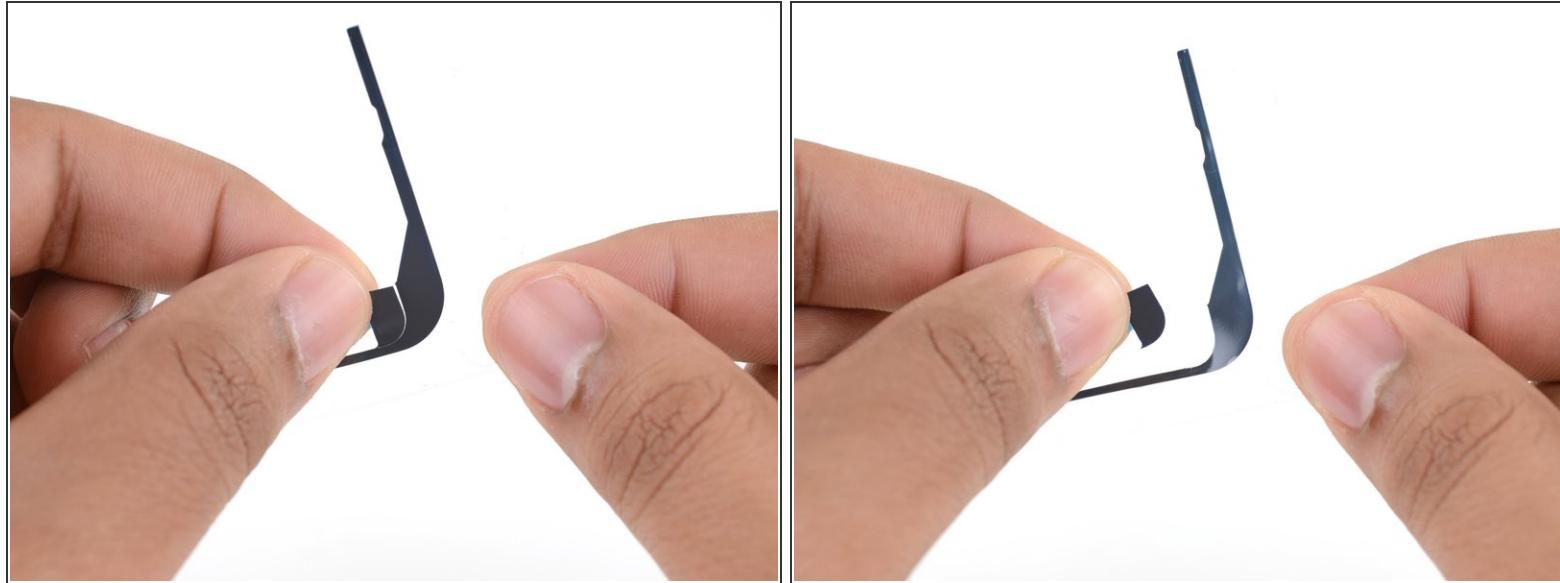


- If there are extra bits of adhesive on the strip that are not required for your particular model of iPad, remove them now.

Step 5



- Align the left adhesive strip to the left edge of the display assembly.
- Beginning from one corner, lay the adhesive strip onto the display assembly and press the strip into place.


Step 6

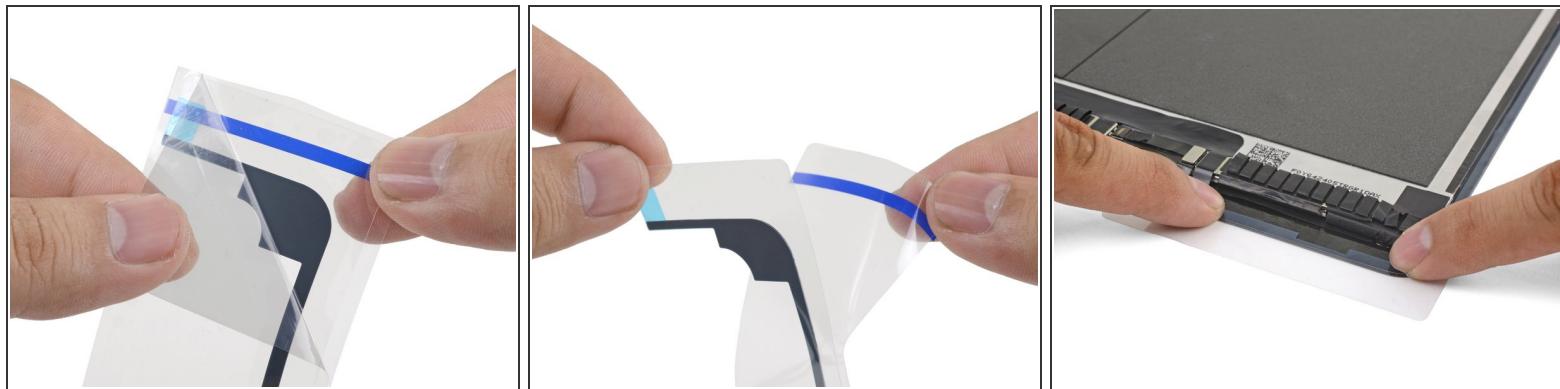

(i) Repeat the process with the right adhesive strip.

- Peel and remove the topmost cling layer from the strip.
- Peel and remove the bottom liner layer from the strip.
- Align the adhesive strip to the right edge of the display assembly.
- Starting from one corner, lay the adhesive strip onto the display assembly and press in place.

Step 7

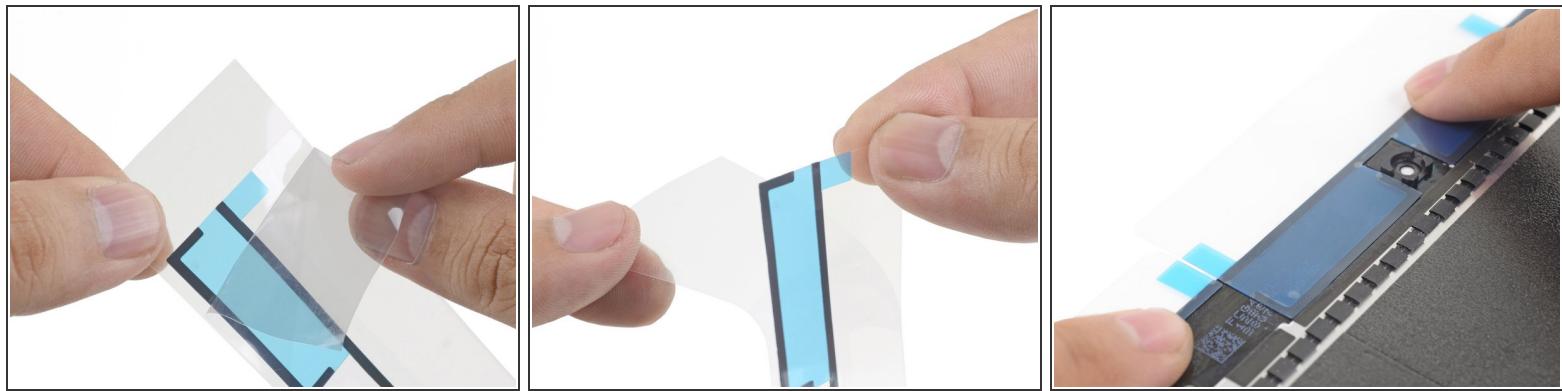

ⓘ Repeat the process for the top adhesive strip.

- Peel and remove the topmost cling layer from the strip.
- Peel and remove the bottom liner from the strip.
- Align the strip to the top of the display assembly such that the straight adhesive line bridges the gap between the left and right strips.
- Press the strip in place.


Step 8



- Peel and remove the clear plastic stiffening layer from all three adhesive strip sections.

ⓘ The adhesive strips should still be covered by colored plastic liners.

Step 9

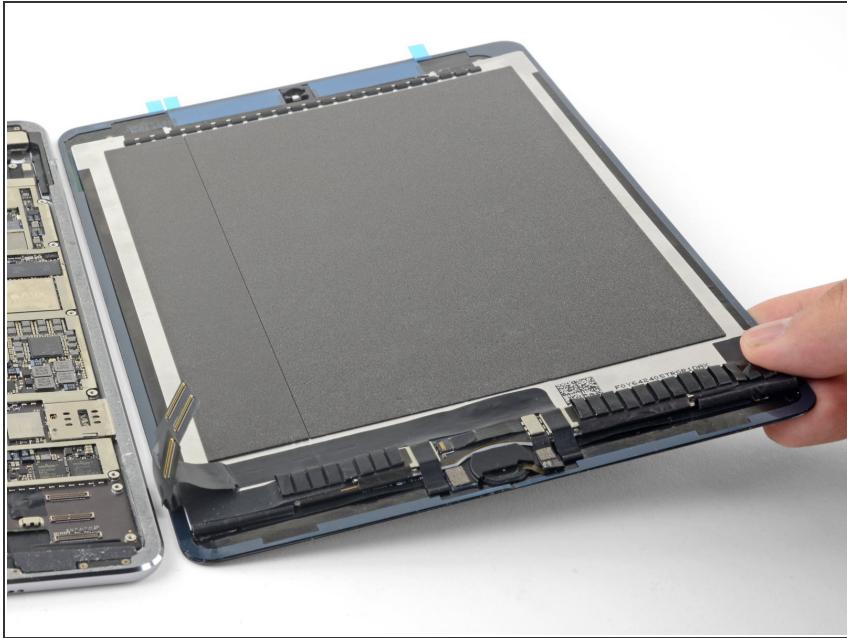

- Continue with the reassembly process until you are ready to seal the device.

Step 10



- Peel and remove the three colored plastic liners to expose the adhesive.
- Close the device and stack some heavy books on top of it for thirty minutes to help the new adhesive bond.

Repair didn't go as planned? Check out our [Answers Community](#) for troubleshooting help.