




# iPad mini 4 LTE Display Assembly Replacement

Prerequisite guide for replacing a screen and digitizer, or home button.

Written By: Evan Noronha

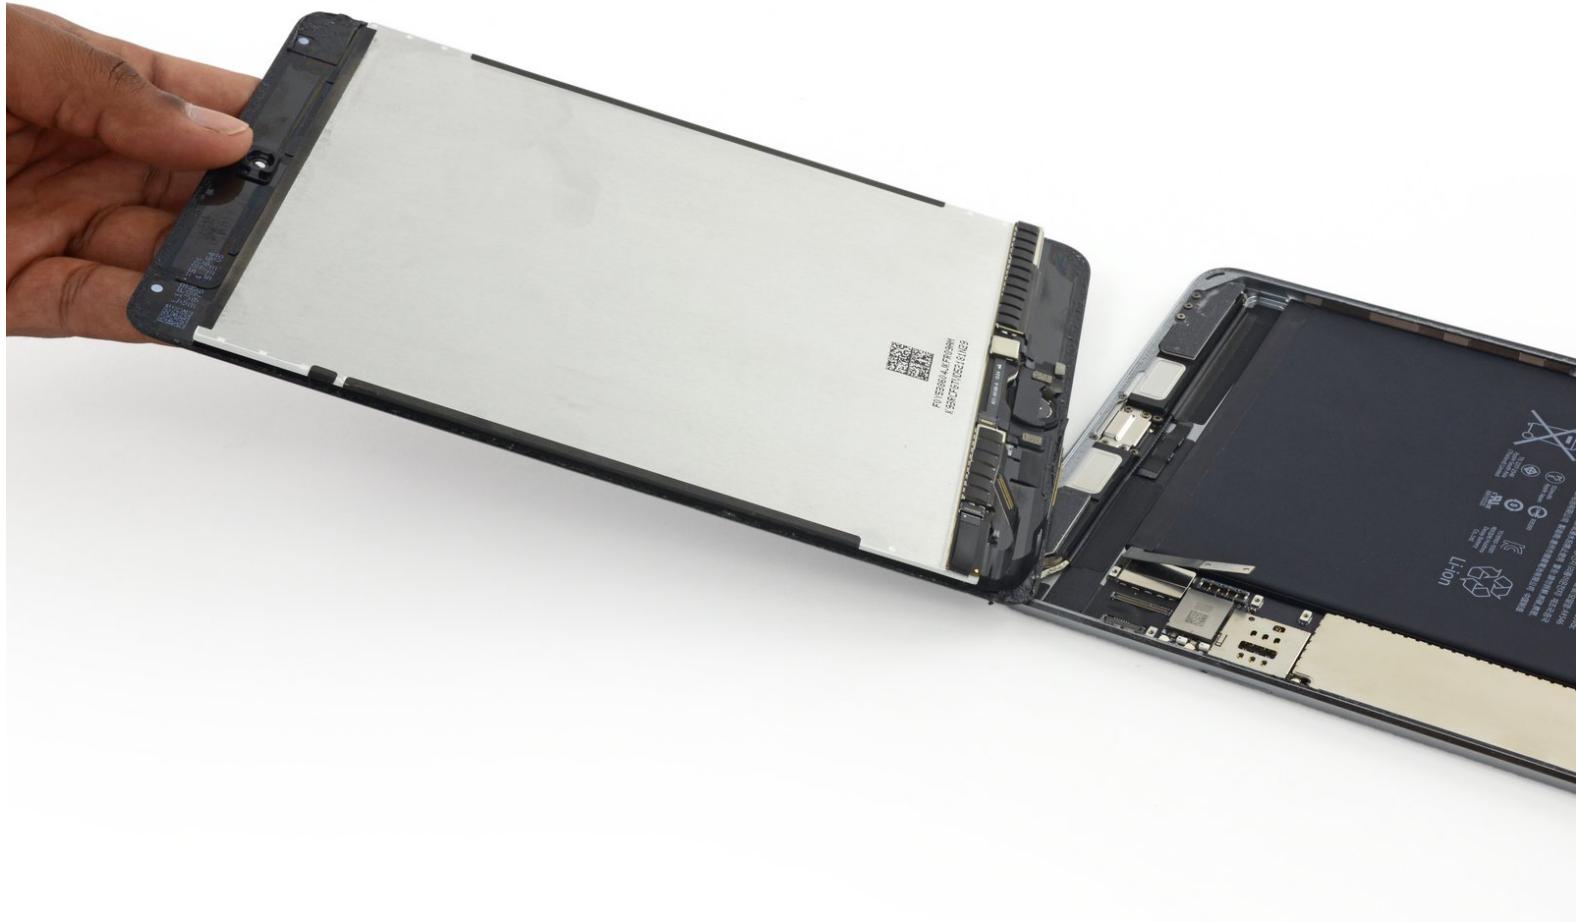

## INTRODUCTION

prereq only guide for replacing a screen and digitizer, or home button.

### TOOLS:

- [iFixit Opening Picks set of 6](#) (1)
- [Suction Handle](#) (1)
- [iOpener](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)

## Step 1 — Display Assembly



- Use the pointed end of a spudger to disconnect the display data connector from its socket on the logic board.
- Use the pointed end of a spudger to disconnect the digitizer cable connector from its socket on the logic board.

 When reconnecting these, press down from one end of the connector to the other. If you press in the middle of the connector, you may bend it, causing damage or a poor connection.

## Step 2



- Remove the display assembly.

 To reinstall your display assembly, you will need to replace the display adhesive. Use our [display adhesive application guide](#) to reapply your display adhesive and reseal your device.

To reassemble your device, follow these instructions in reverse order.