



iPhone 11 Rear-Facing Cameras Replacement

Replace the dual rear camera assembly in the iPhone 11. Both camera modules are replaced together as a single unit.

Written By: Jeff Suovanen



INTRODUCTION

Use this guide to remove and replace the rear cameras in the iPhone 11. The rear camera assembly consists of one wide-angle module and one ultra-wide angle module. Both are replaced together, as a single unit.

Note: This guide instructs you to completely detach the display cables and remove the display assembly in order to better access the rear cameras—however, it's possible to remove and replace the rear cameras with the display cables still connected. Advanced readers may skip disconnecting the display in order to save time, as long as the display is properly supported and the display cables are not damaged.



TOOLS:


- [P2 Pentalobe Screwdriver iPhone](#) (1)
- [iOpener](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Suction Handle](#) (1)
- [iSlack](#) (1)
- [Tri-point Y000 Screwdriver Bit](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)



PARTS:

- [iPhone 11 Rear Camera](#) (1)

Step 1 — Remove the pentalobe screws

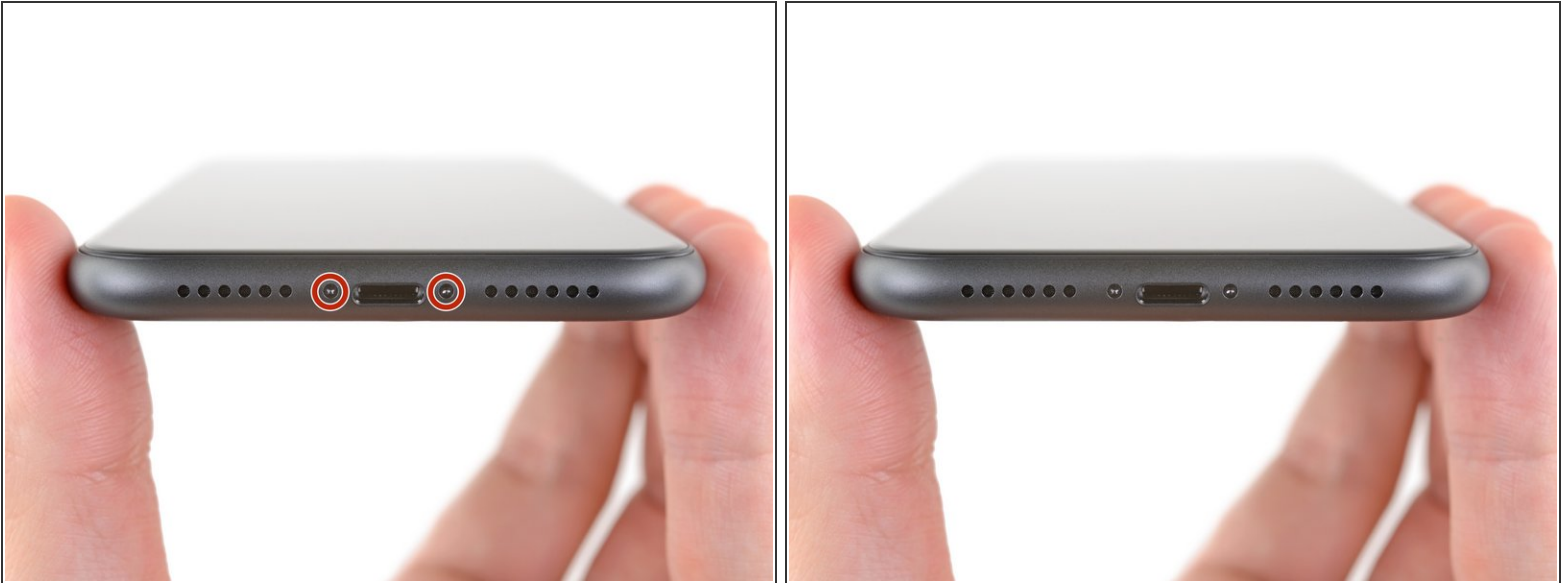

-  Before you begin, discharge your iPhone battery below 25%. A charged lithium-ion battery can catch fire and/or explode if accidentally punctured.
- Power off your iPhone before beginning disassembly.
 - Remove the two 6.7 mm-long pentalobe screws at the bottom edge of the iPhone.
-  Opening the iPhone's display will compromise its waterproof seals. Have replacement seals ready before you proceed past this step, or take care to avoid liquid exposure if you reassemble your iPhone without replacing the seals.

Step 2 — Heat the lower edge of the phone



- ⓘ Heating the lower edge of the iPhone helps soften the adhesive securing the display, making it easier to open.
- Use a hairdryer or heat gun or [prepare an iOpener](#) and apply it to the lower edge of the iPhone for about a minute.

Step 3 — Apply suction cup(s)



- i** The next two steps demonstrate the iSlack, a handy tool that we recommend for anyone doing frequent repairs. **If you aren't using the iSlack, skip down two steps for an alternate method.**
- If the plastic depth gauge is attached at the center of the iSlack, remove it now—it's not needed for larger iPhones like the iPhone 11.
 - Position the suction cups near the bottom edge of the iPhone—one on the front, and one on the back.
 - Press both suction cups firmly into place.
- i** If your display or back glass is badly cracked, [covering it with a layer of clear packing tape](#) may help the suction cups adhere. The iSlack also includes two pieces of tape for this purpose.

Step 4



- Hold onto your iPhone securely and close the handle of the iSclack to slightly separate the screen from the rear case of the phone.
 - ⚠ Don't try to completely separate the screen; a small opening along the bottom edge is all you need.
- Insert an opening pick into the gap under the display on the lower edge of the iPhone.
- **Skip the next two steps.**

Step 5




- If you're using a single suction handle, apply it to the bottom edge of the phone, while avoiding the curved portion of the glass.
- ⓘ If your display is badly cracked, [covering it with a layer of clear packing tape](#) may help the suction cup to stick. Alternatively, you can use very sticky tape [instead of the suction cup](#). Or if all else fails, you can superglue the suction cup to the broken screen.

Step 6 — Lift the display slightly



- Pull up on the suction cup with firm, constant pressure to create a slight gap between the front panel and rear case.
 - Insert an opening pick into the gap.
- i** The watertight adhesive holding the display in place is very strong; creating this initial gap takes a significant amount of force. If you're having a hard time opening a gap, apply more heat, and gently rock the screen up and down to weaken the adhesive until you create enough of a gap to insert your tool.

Step 7 — Separate the screen adhesive

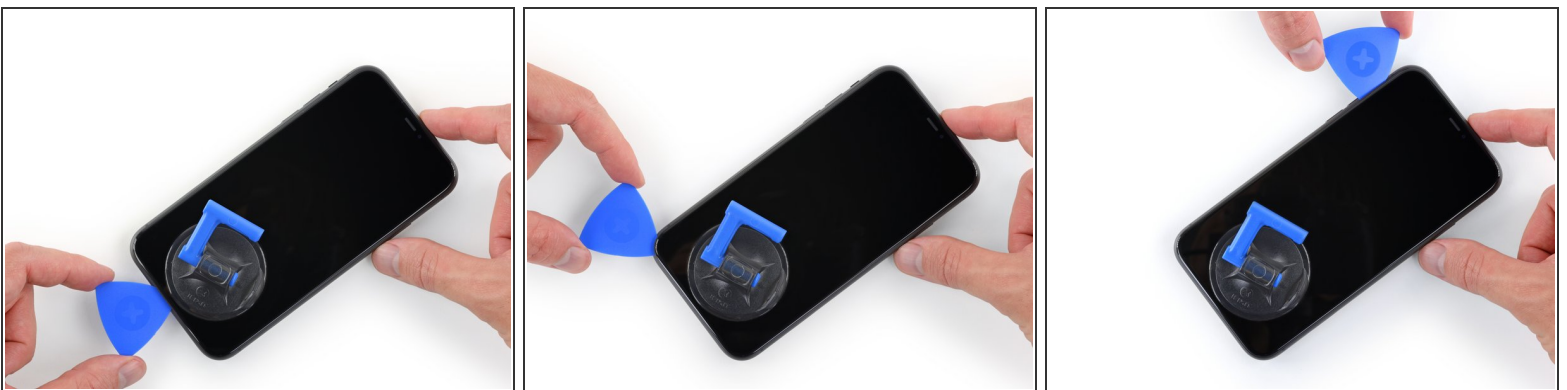

- Slide the opening pick around the lower left corner and up the left edge of the iPhone, slicing through the adhesive holding the display in place.
- ⚠** Don't insert the opening pick too far into the iPhone, or you may cause damage to internal components.

Step 8



- Re-insert your pick at the bottom edge of the iPhone, and slide it up the right side to continue separating the adhesive.

 Don't insert the pick very far, or you may damage the display cables along this side of the iPhone. Insert it only a few millimeters, or about the width of the display bezel.

Step 9



 The top edge of the display is secured with both glue and clips.

- Gently pull the right edge of the display **down** slightly (in the direction of the Lightning port).
- Insert your pick into the top-right corner of the phone.

Step 10



- Continue pulling the display down (toward the Lightning port) as needed in order to make a gap large enough for the pick.
 - Slide the pick to the top left corner and cut any remaining adhesive securing the display.
- ⚠ Again, don't insert the pick more than a few millimeters—about the width of the display bezel—or you may damage the Face ID sensor array.

Step 11 — Remove the suction cup(s)



- Pull the small nub on the suction cup to detach it from the front panel.
- If you used an iSlack and it's still affixed to the iPhone, remove it now.

Step 12 — Open the iPhone



- Open the iPhone by swinging the display up from the left side, like the back cover of a book.

 Don't try to fully separate the display yet, as several fragile ribbon cables still connect it to the iPhone's logic board.

- Prop the display up against something sturdy.

 During reassembly, lay the display in position, align the clips along the top edge, and carefully press the top edge into place before snapping the rest of the display down. If it doesn't click easily into place, check the condition of the clips around the perimeter of the display and make sure they aren't bent.


Step 13 — Display Assembly



- To access the screws in the following step, tilt the display by slightly lifting its lower edge.


⚠ Be careful not to strain or tear the display cables.

Step 14 — Unscrew the battery connector cover

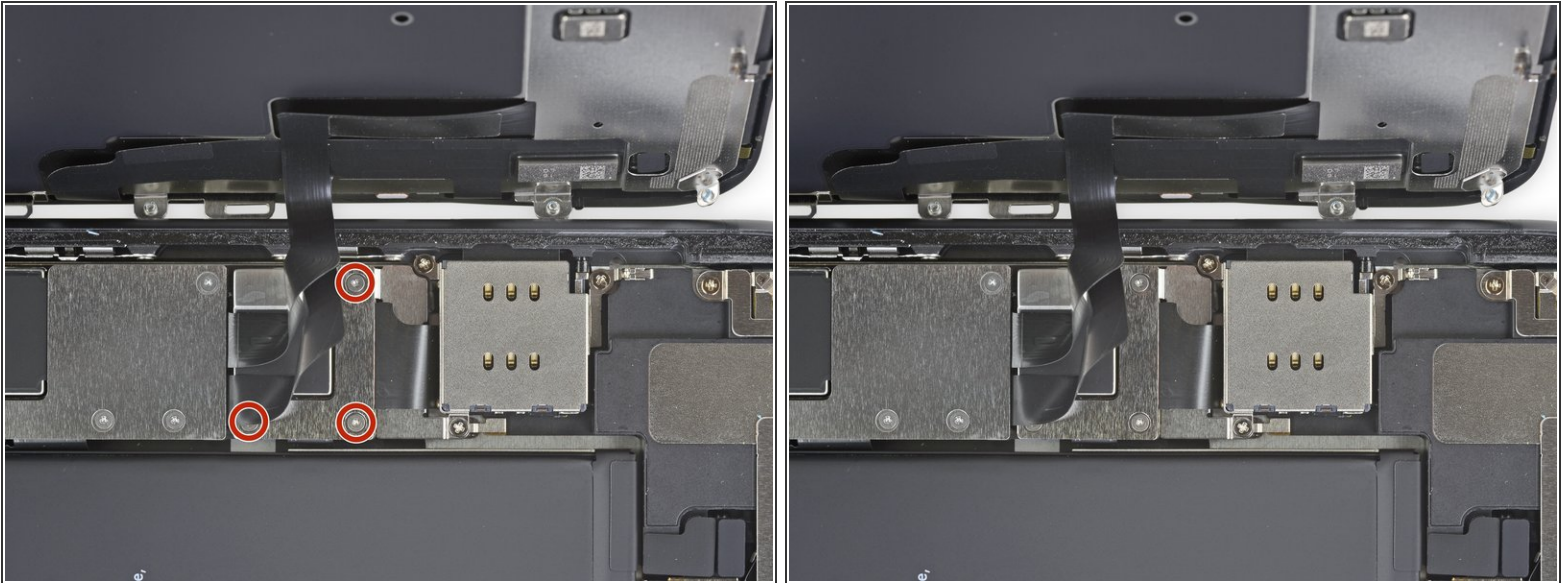



- Use a Y000 driver to remove the three 1.1 mm-long screws securing the battery connector bracket.
- ⓘ Throughout this repair, [keep track of each screw](#) and make sure it goes back exactly where it came from.
- During reassembly, this is a good point to power on your iPhone and test all functions before you seal the display in place. Be sure to power your iPhone back down completely before you continue working.

Step 15 — Remove the battery connector cover

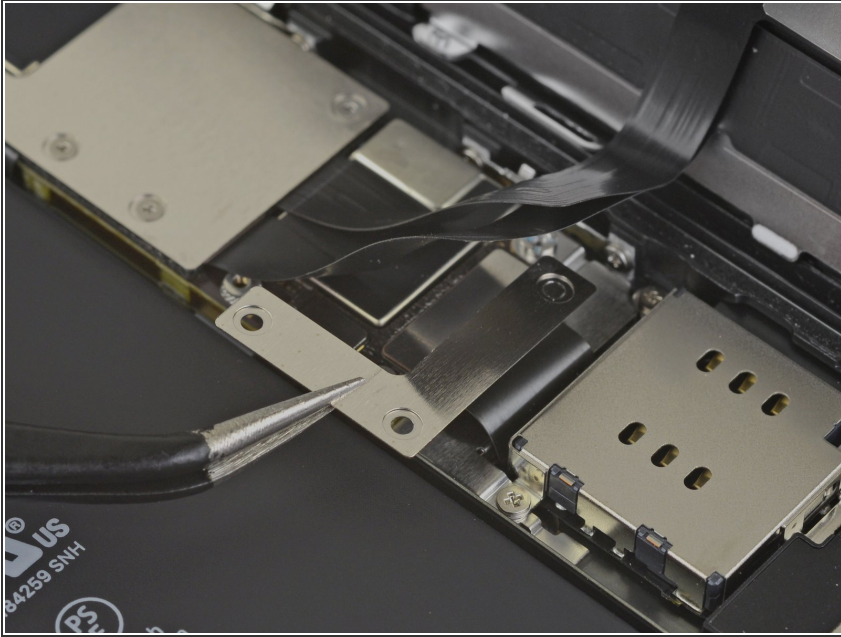


- Remove the bracket.

Step 16 — Disconnect the battery

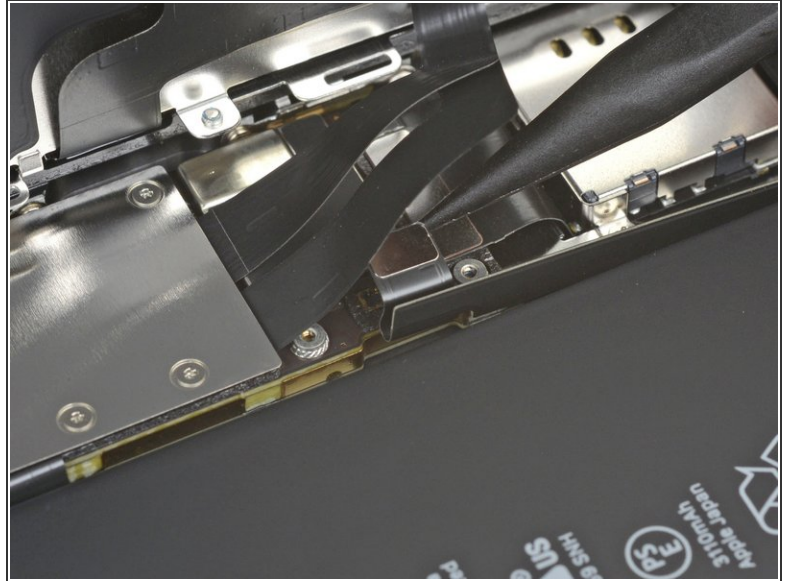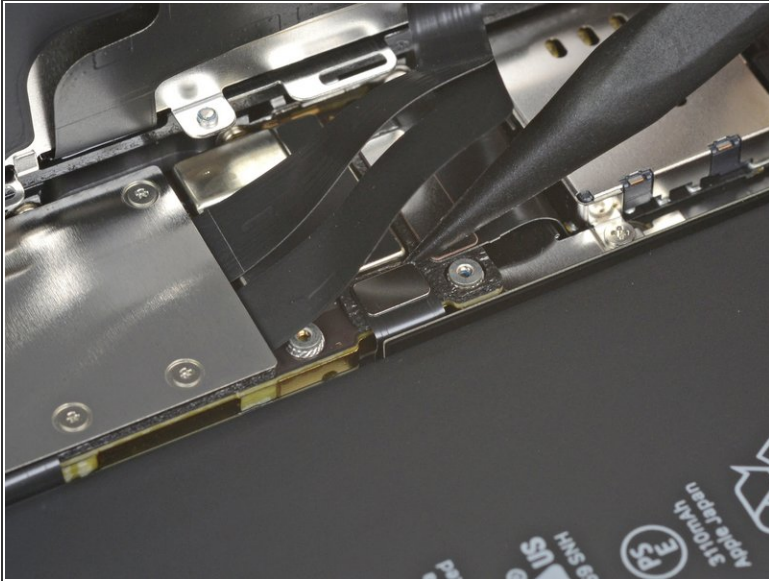


- Use a spudger or a clean fingernail to pry the battery connector up from its socket on the logic board.
- ⓘ Try not to damage the black silicone seal surrounding this and other board connections. These seals provide extra protection against water and dust intrusion.
- Bend the connector slightly away from the logic board to prevent it from accidentally contacting the socket.

Step 17 — Unscrew the logic board cover screws

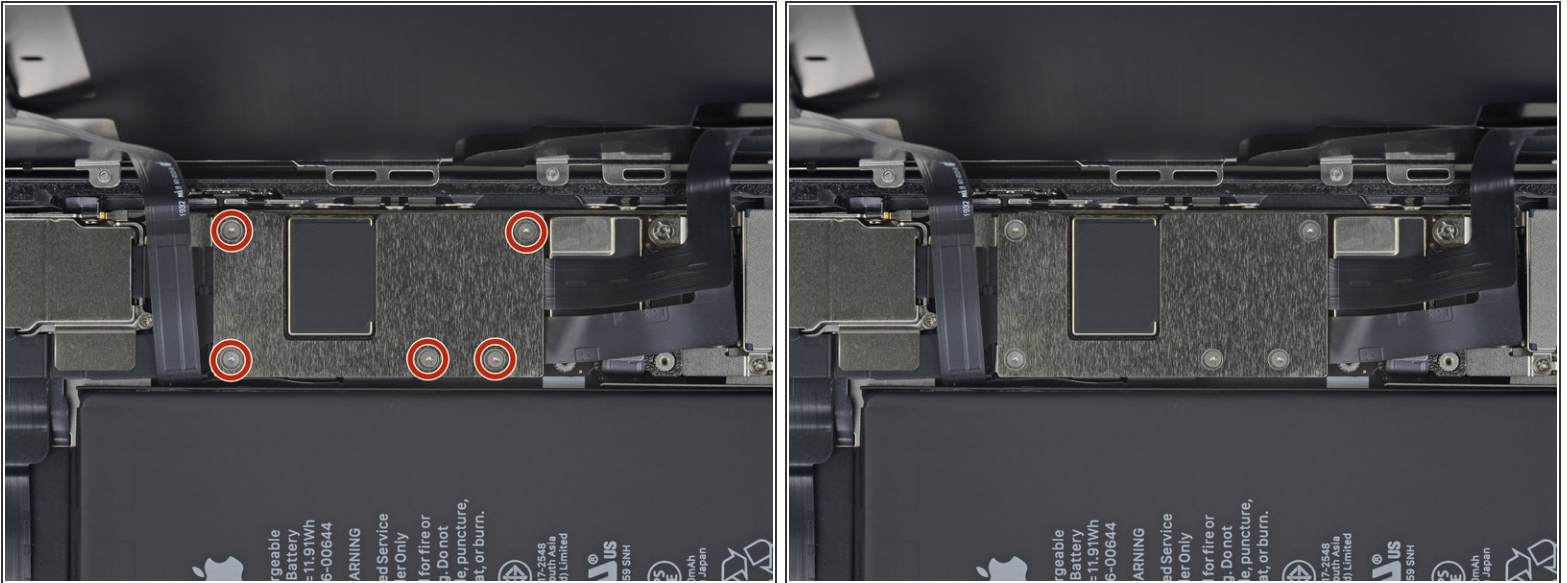

- Use a Y000 driver to remove the five 1.1 mm screws securing the logic board cover bracket.

Step 18 — Remove the logic board cover bracket

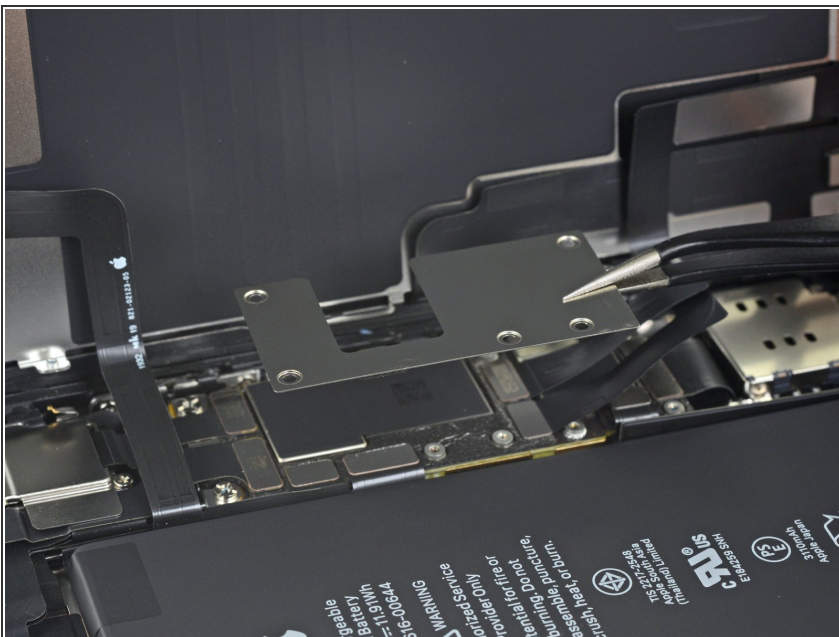


- Remove the bracket.

Step 19 — Disconnect the display



- Use a spudger or a fingernail to disconnect the LCD panel cable connector.
- Disconnect the digitizer connector next to it.

Step 20 — Disconnect the front sensors

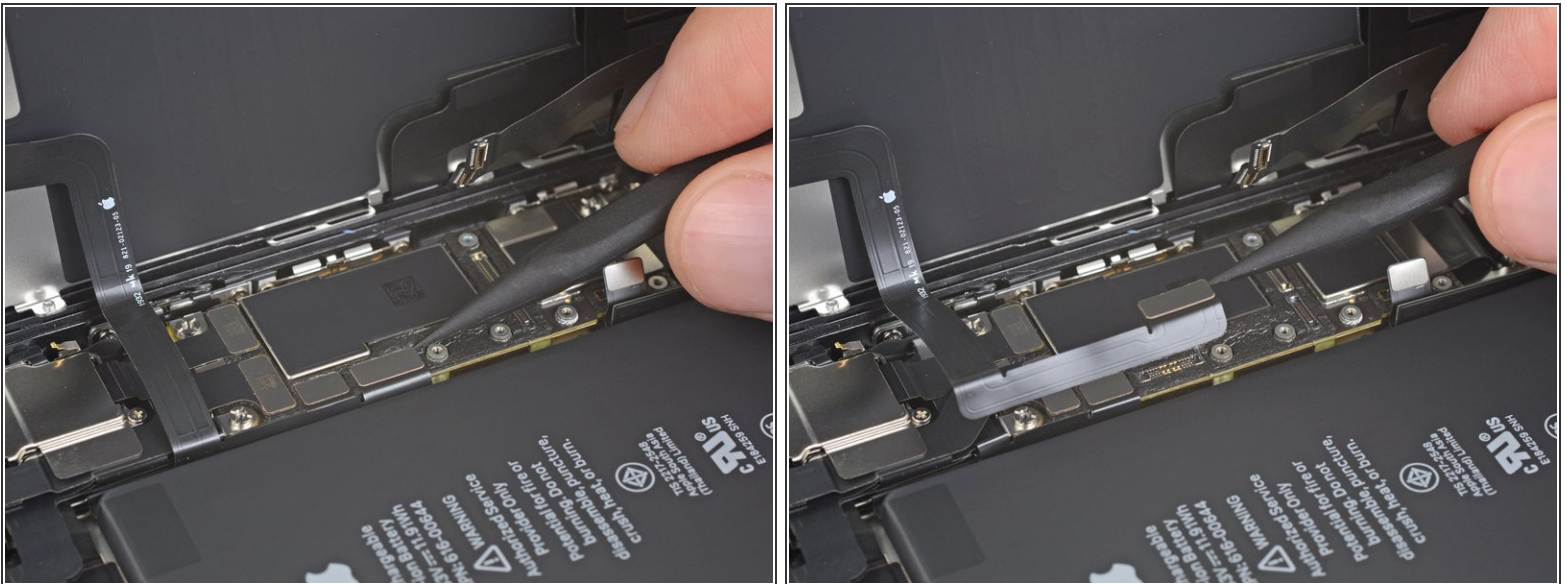

- Use the point of a spudger or a fingernail to disconnect the front panel sensor assembly connector.

Step 21 — Remove the display assembly




- Remove the display assembly.
- ★ During reassembly, pause here if you wish to [replace the waterproof adhesive around the edges of the display](#).

Step 22 — Unscrew the rear camera cover



- Remove the two Phillips screws securing the rear camera cover:
 - One 1.4 mm screw
 - One 1.3 mm screw

Step 23 — Remove the camera cover

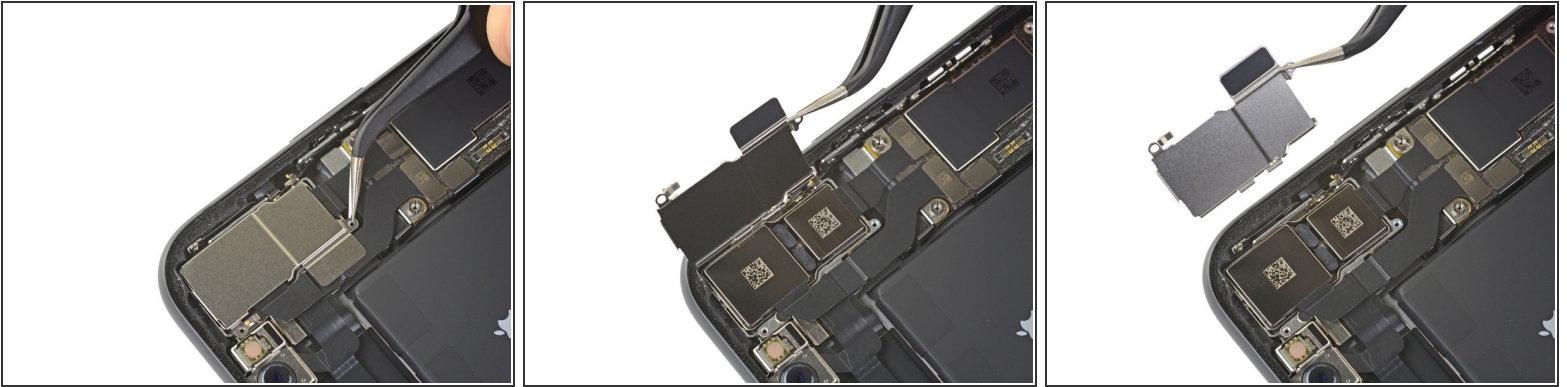


- Lift the camera cover from the edge closest to the battery, and remove it.

☞ To reinstall the camera cover, follow the images exactly in reverse: first, lower the outside edge until the two protruding tabs on the cover are slotted securely into the bracket on the outer edge of the camera module. Then, hinge the cover closed.

⚠ The cover only lays flat after the two tabs are seated correctly.

Step 24 — Disconnect the cameras

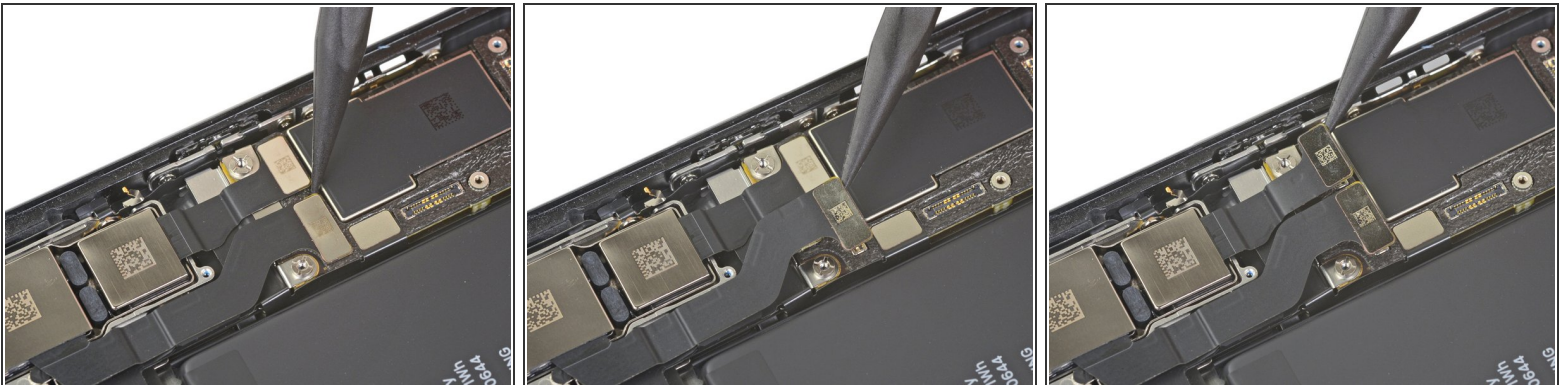

- Use a spudger or a fingernail to disconnect the two camera cable connectors by prying them straight up from their sockets.

Step 25 — Loosen the camera assembly



- Insert the point of a spudger at the bottom right corner of the camera, between the camera assembly and the iPhone's frame.
- Gently pry up to lever the camera out of the iPhone.

Step 26



- Remove the rear-facing camera assembly.

Compare your new replacement part to the original part—you may need to transfer remaining components or remove adhesive backings from the new part before installing.

To reassemble your device, follow the above steps in reverse order.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Try some [basic troubleshooting](#), or ask our [iPhone 11 Answers community](#) for help.