




iPhone 4S Dock Connector Cable Replacement

Internal prerequisite.

Written By: Walter Galan

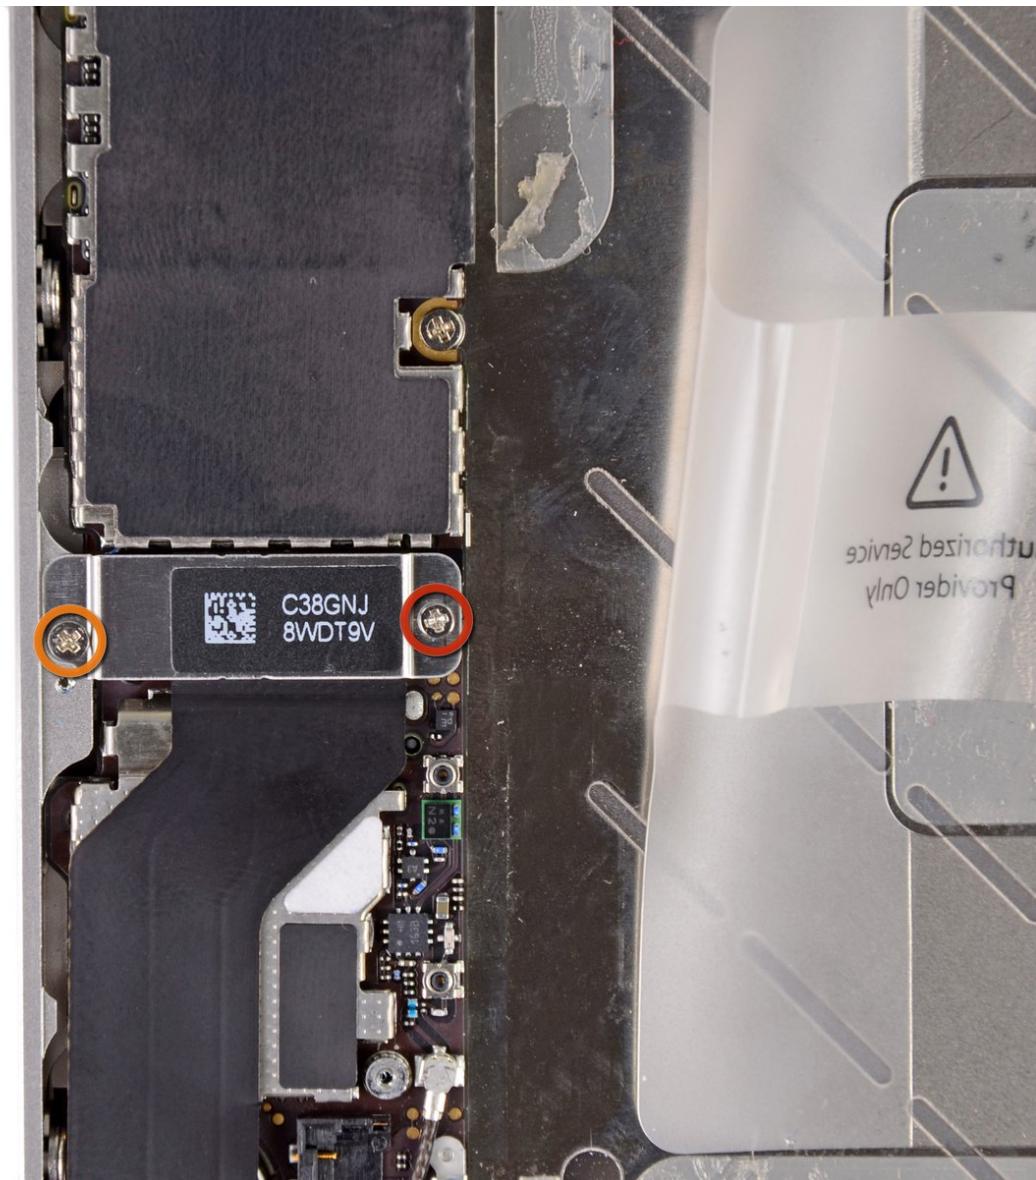



INTRODUCTION

Internal prerequisite.

TOOLS:

- [Phillips #000 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Dock Connector Cable

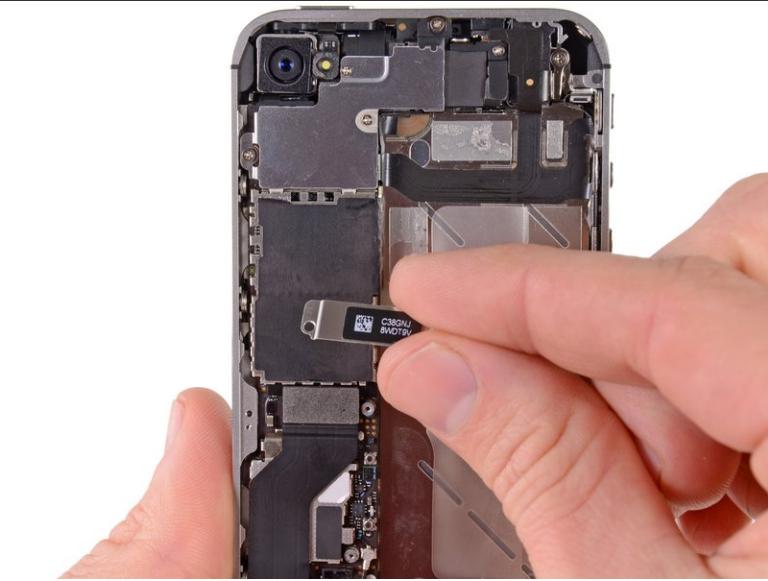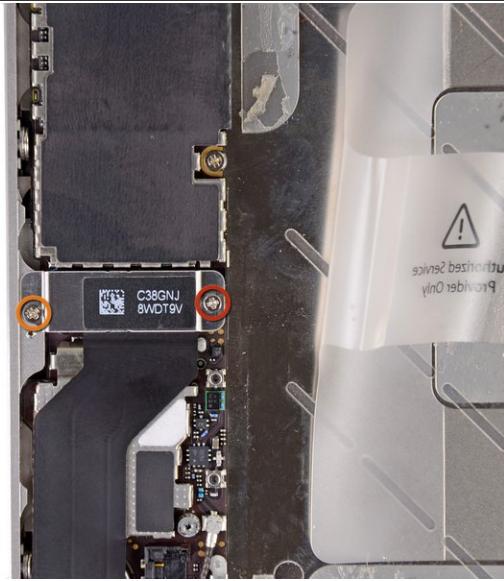

- Remove the following screws securing the dock connector cable cover to the logic board:
 - One 1.5 mm Phillips screw
 - One 1.2 mm Phillips screw
- Remove the metal dock connector cable cover.

Step 2




- Use the edge of a plastic opening tool to pry the dock cable up from its socket on the logic board.

Step 3



- Peel the dock connector cable off the adhesive securing it to the logic board and the side of the speaker enclosure.

Step 4

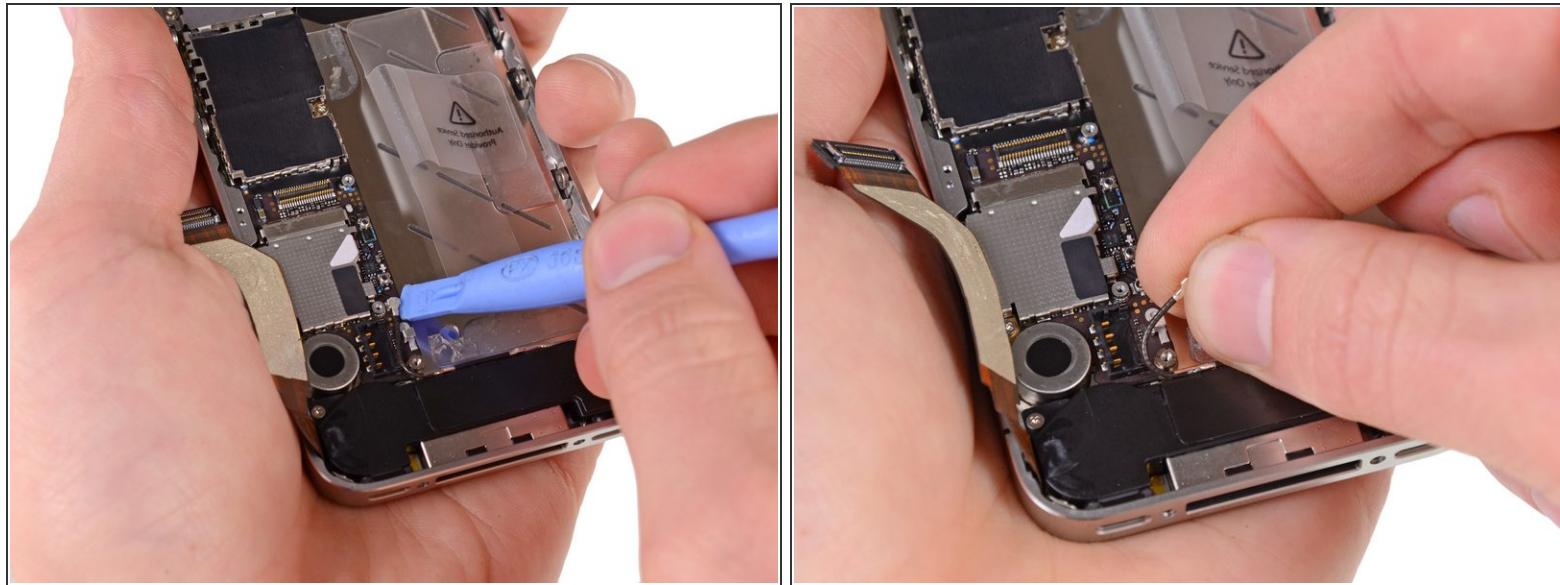

- Use the edge of a plastic opening tool to pry the cellular antenna cable up from its socket on the logic board.
- De-route the cellular antenna cable out from under the metal fingers attached to the logic board.

To reassemble your device, follow these instructions in reverse order.