



iPhone 5s Rear Facing Camera Replacement

Prerequisite to remove the camera after the logic board.

Written By: Sam Goldheart




INTRODUCTION

Prerequisite to remove the camera after the logic board.

TOOLS:

- Tweezers (1)

Step 1 — Rear Facing Camera

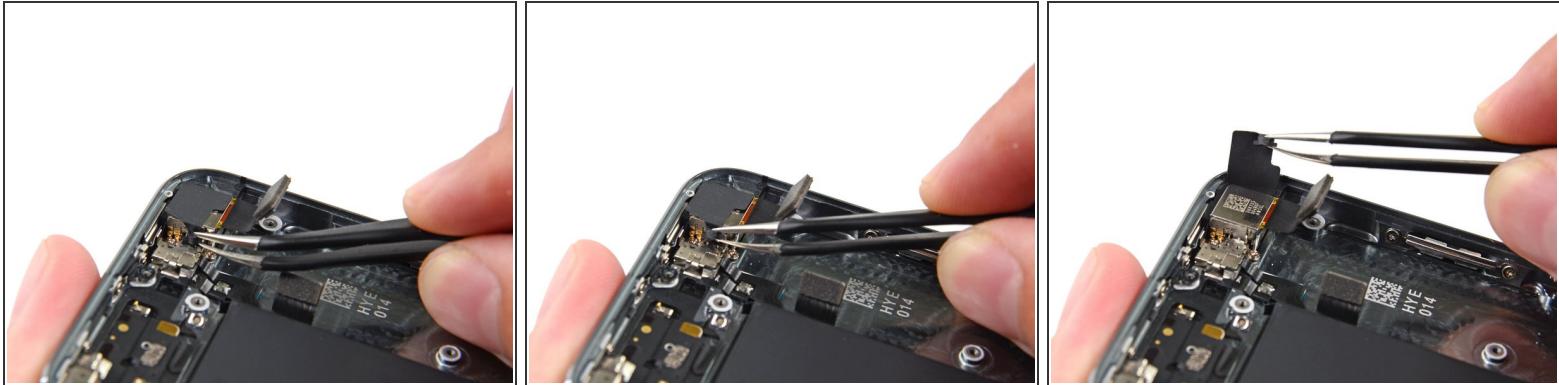

- Using a pair of tweezers, flip the rubber camera cover out of its clip and toward the outside of the rear case.

⚠ Do not attempt to fully remove this cover. It is attached to the rear case and only needs to be flipped open, not removed.

Step 2



- Remove the rear-facing camera from the rear case.

☒ During reassembly, the camera cable should bend in a 'U' shape to slot in behind the logic board.

☒ If the rubber camera bumper has shifted, be sure to replace it before reassembling your iPhone.

To reassemble your device, follow these instructions in reverse order.