



iPhone 5s Vibrator Replacement

Prerequisite to remove the vibrator.

Written By: Sam Goldheart




INTRODUCTION

Prerequisite to remove the vibrator.

TOOLS:


- **Tweezers (1)**
- **Phillips #000 Screwdriver (1)**

Step 1 — Vibrator

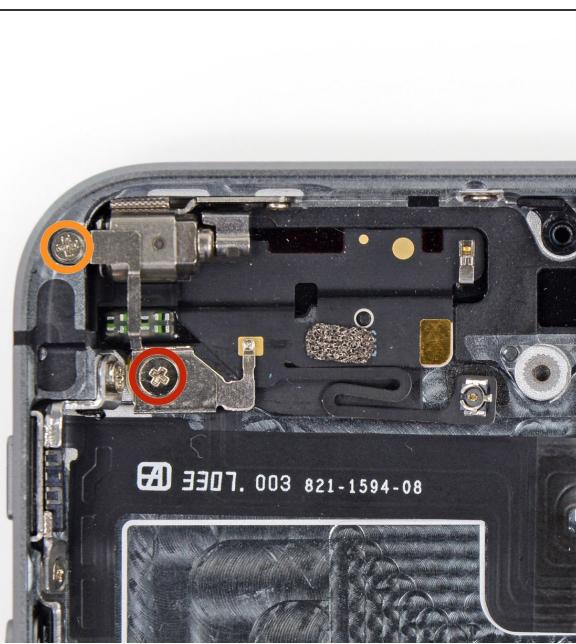


- Remove the following Phillips #000 screws from the vibrator bracket:
 - One 1.7 mm screw
 - One 2.5 mm screw

Step 2

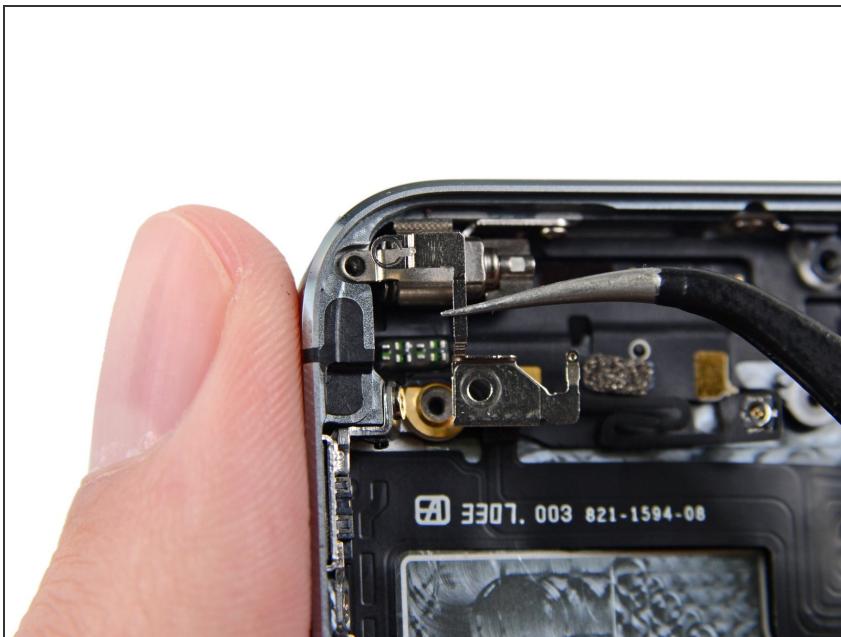

- With a set of tweezers, remove the vibrator bracket.

Step 3

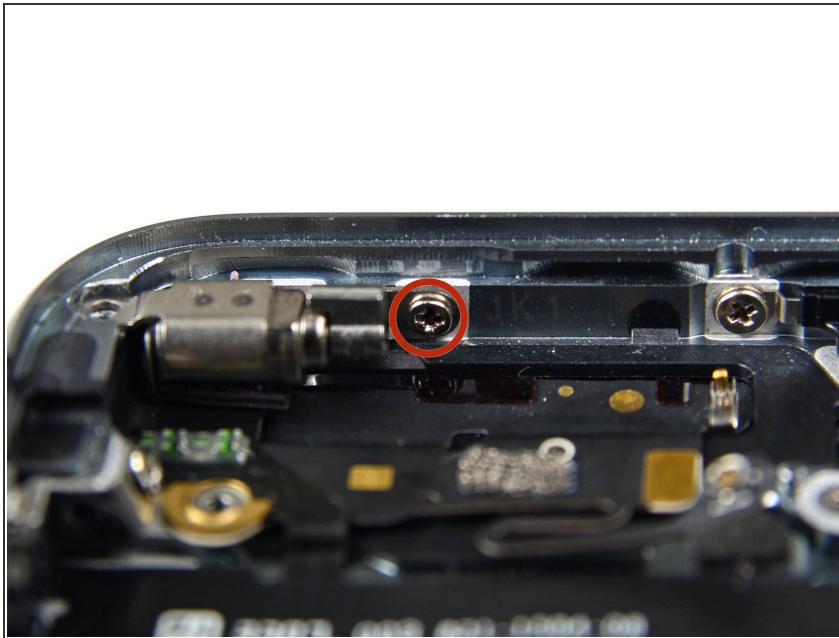

- Remove the 1.7 mm Phillips #000 screw securing the vibrator to the rear case.

Step 4



- Use a set of tweezers to remove the vibrator from the rear case.

To reassemble your device, follow these instructions in reverse order.